

STATE OF MONTANA - TIMBER SALE CONTRACT FOR STUMPAGE SOLD BY THE TON

VERSION 17 – JANUARY 2015

DEPARTMENT OF NATURAL RESOURCES & CONSERVATION 2705 Spurgin Road Missoula, MT 59804	NAME, ADDRESS AND PHONE NUMBER OF PURCHASER: _____ _____ _____	
	Tax I.D. Number _____	
LAND OFFICE Northwestern	SALE NAME Cilly Graves	SALE NUMBER _____
UNIT OFFICE Swan	AWARD DATE _____	TERMINATION DATE September 1, 2019

THIS CONTRACT IS MADE AND ENTERED INTO by and between the State of Montana, acting through its Department of Natural Resources & Conservation, Trust Land Management Division (hereinafter called the State) and (_____, a sole proprietorship; or _____, a partnership; or _____, Inc. a corporation) (hereinafter called Purchaser) having an office and principal place of business at the address shown above. Purchaser's bid on the timber described in this contract has been accepted by the State after having been estimated, appraised and advertised for sale as required by law. Therefore, in consideration of the mutual promises contained in this agreement, the State agrees to sell and the Purchaser agrees to purchase the designated timber located on the areas described in this Contract at the specified rates of payment and in strict conformity with the requirements, standards, specifications and conditions set forth in this Contract.

-CONTENTS OF CONTRACT-			
Section	Page	Section	Page
	2	IV. CONTRACT VIOLATIONS AND	12
I. GENERAL TERMS	3	PENALTIES	
II. CHARGES AND PAYMENTS	9	V. FIRE PROTECTION	15
III. MEASUREMENT AND LOG	11	VI. RESOURCE PROTECTION	16
ACCOUNTABILITY		VII. LOGGING	18
		VIII. EXECUTION	30
-ATTACHMENTS-			
The following attachments are hereby made a part of this contract:			
ATTACHMENT A: Timber Sale Maps			3 Pages
ATTACHMENT B: Road Construction, Improvements and Maintenance Specifications			40 Pages
ATTACHMENT C: Forest Fire Regulations			2 Pages
ATTACHMENT D: Working in Bear Habitat Brochure			1 Page
ATTACHMENT E: Montana Streamside Protection Act (124 Permit and Application)			12 Pages
ATTACHMENT F: DWD Computation Form and Tables			2 Pages
ATTACHMENT G: Scarification Transect Procedure			1 Page
ATTACHMENT H: Piling and Scarification Requirements			2 Pages

TIMBER SALE CONTRACT

TABLE 1 - LEGAL DESCRIPTION OF THE GROSS SALE AREA			
The timber designated for sale under this Contract is within the following sale area			
Subdivisions	Section	Tw	Rge
S ½	9	24N	17W
ALL	16	24N	17W
NE4	17	24N	17W
Total approximate acres in gross sale area:	1,120		
Number of harvest units (Including Right-of-Way):	10		
Total acres in harvest units (Including Right-of-Way):	221		

TABLE 1 (continued) - ESTIMATED SALE VOLUME	
The state does not guarantee the product weight, by species or in total, to equal the estimated advertised weight in quantity or product designation.	
Product	Estimated Quantity (Tons)
Sawlogs	17,583
Other Material (specify)	
Total Estimated Volume	17,583

TABLE 1 (continued) - PAYMENT RATES			
Payment	Amount		Requirements
Performance Bond Amount:	20% of bid value		See Section II.A.1-3.
	Product	Amount	
Stumpage Rate per ton:	Sawlogs Other Material	\$1.00	See Section II.B.1-3.
Forest Improvement (FI) Fee Per ton:	Sawlogs	\$5.10	See Section II.B.4
Quarterly F.I. payment		\$14,945.55	(FI/ton x total tons / 6) See Section II.B.4

I. GENERAL TERMS

A. DEFINITION OF CONTRACT LANGUAGE: The following definitions apply to terms used in this Contract:

1. Administrator – The Forest Management Bureau Chief, Trust Land Management Division, Department of Natural Resources & Conservation
2. Board – The Montana Board of Land Commissioners.
3. Department – The Department of Natural Resources and Conservation.
4. Draw – A swale or drainageway that may not have perceptible or definite beds or banks.
5. Environmental Law – Includes, but is not limited to, the following laws and any regulations promulgated under these laws: the Comprehensive Environmental Response, Compensation and Liability Act (“CERCLA”) (42 U.S.C. § 9601 *et seq.*), as amended; the Resource Conservation and Recovery Act (“RCRA”) (42 U.S.C. §§ 6901 – 6987), as amended; the Clean Air Act (42 U.S.C. § 7401, *et seq.*), as amended; the Safe Drinking Water Act (42 U.S.C. § 300f *et seq.*), as amended; the Clean Water Act (33 U.S.C. § 1401 *et seq.*), as amended; the Clean Air Act of Montana (Mont. Code Ann. § 75-2-101 *et seq.*), as amended; the Montana Water Quality Act (Mont. Code Ann. § 75-5-101 *et seq.*), as amended; the Montana Solid Waste Management Act (Mont. Code Ann. § 75-10-201 *et seq.*), as amended; the Montana Hazardous Waste Act (Mont. Code Ann. § 75-10-401 *et seq.*), as amended; the Montana Comprehensive Environmental Cleanup and Responsibility Act (Mont. Code Ann. § 75-10-701 *et seq.*) as amended; and the Montana Underground Storage Tank Act (Mont. Code Ann. § 75-11-501 *et seq.*) as amended.
6. Forest Officer – The State field representative assigned the job of contract administration for this timber sale Contract.
7. Hazardous or deleterious substance – Means a substance that, because of its quantity, concentration, or physical, chemical, or infectious characteristics, may pose an imminent and substantial threat to public health, safety, or welfare or the environment, and is:
 - a. A substance that is defined as a hazardous substance by section 101(14) of CERCLA, 42 U.S.C. § 9601(14), as amended.
 - b. A substance identified by the administrator of the United States Environmental Protection Agency as a hazardous substance pursuant to section 102 of CERCLA, 42 U.S.C. § 9602, as amended.
 - c. A substance that is defined as a hazardous waste pursuant to section 1004(5) of RCRA, 42 U.S.C. § 6903(5), as amended, including a substance listed or identified in 40 CFR 261.
 - d. Any petroleum product.
8. Operating season – The annual time period during which field activities (logging, hauling, construction, etc.) may be conducted.
9. Paid or payment – Except as otherwise expressly stated in the Contract, full remuneration by either cash, money order or certified check.
10. Purchaser – The signatory party to this Contract other than the Administrator. Purchaser is also defined to include employees and agents of the Purchaser authorized to conduct activities as required for execution of the timber sale Contract. As an independent contractor, neither the Purchaser, its employees or agents shall be considered employees of the State of Montana pursuant to work performed under this Contract.

TIMBER SALE CONTRACT

11. Sawlog – A green or dead log as further defined under Section VII.C.
12. State – The State of Montana and its agents and employees.
13. Stream – A stream is a natural watercourse of perceptible extent that has a sandy or rocky bottom or definite banks and confines and conducts continuously or intermittently flowing water.
14. Stumpage – The rate paid in dollars per ton as specified in Table 1 for Sawlogs and/or Other Material.
15. Supervisor – A person designated by the Purchaser in charge of operations on site at the sale area at all times when construction or harvesting operations are in progress. The Supervisor shall have authorization to receive notices from the Forest Officer and take appropriate action with regard to breach and/or violations of the terms of the contract.

B. REMOVAL OF TIMBER AND TITLE TRANSFER:

1. Provided the Purchaser has paid for timber as required in Section II.B.1, ADVANCE STUMPAGE PAYMENT, the Purchaser has the right to cut and remove timber from the sale area provided all Contract requirements related to the commencement of operations have been met.
2. Title to all timber included in this contract shall be retained by the State until:
 - a. The timber has been paid for.
 - b. The timber has been measured, as described in Section III.A. MEASUREMENT AND LOG ACCOUNTABILITY.
 - c. The timber has been properly marked and ticketed as described in Section III.C & E. MEASUREMENT AND LOG ACCOUNTABILITY, and removed from the gross sale area,
3. Title to timber remaining on the gross sale area at termination of the contract shall remain with the State of Montana.
4. As documented in this contract, or otherwise agreed to, all roads and other improvements become the property of the State as they are constructed.

C. TERM OF CONTRACT: This Contract is effective upon approval and execution by the Administrator and shall terminate on the Termination Date shown on page 1 unless terminated sooner for successful completion or for gross or persistent breach and/or failure to promptly and properly remedy contract violations of the Contract terms pursuant to Section IV. B, TERMINATION.

D. PRE-OPERATIONS MEETING: No activity may occur on the sale area until a pre-operations meeting is conducted between the Purchaser and the State. The Purchaser shall notify the Forest Officer at least seven (7) days prior to the start of operations to schedule the pre-operations meeting. The Forest Officer will specify to the Purchaser what information the Purchaser must provide to the State at the pre-operations meeting.

E. ANNUAL OPERATING PLAN: Purchaser may be required to submit a written annual operating plan, as specified by, and at the request of the Forest Officer.

F. CONTRACT TERM EXTENSION:

1. In the event that Purchaser's operations are delayed and Purchaser is not able to complete the requirements of this Contract prior to the harvest completion date or the termination date, the State may grant an extension of the term of this Contract. An extension will be considered by the State under only the following circumstances:

TIMBER SALE CONTRACT

- a. The State determines an extension is in its best interests;
 - b. Purchaser applies for the extension in writing at least 30 days prior to the termination date.
 - c. The State notifies the Purchaser that an extension is required.
 - d. Purchaser has provided the State with written notice from the surety that the performance bond on this contract has been extended for a period commensurate with the requested contract extension.
 - e. Purchaser has made a good faith effort to complete the sale.
 - f. The extension request is not based on poor log and/or market conditions.
2. If the contract term extension is granted, Purchaser shall conduct continuous operations through the operating periods and/or resume operations at the start of the next operating period until the requirements of this Contract are completed. No extension shall be granted for a period longer than eighteen (18) months after the termination date as provided herein unless a longer extension is determined to be in the State's best interest.
 3. If the extension is requested and granted because of delays resulting from matters within Purchaser's control, the following will apply:
 - a. Purchaser shall pay an extension fee of \$ 500.00.
 - b. Stumpage rates for any volume cut, skidded or hauled during the extension period will be escalated a minimum of 10% to reflect the interest lost to the trust beneficiaries.
 - c. In addition to the minimum 10% stumpage-rate escalation provided for in Section I.F.3.b., the original stumpage bid rate will be subject to escalation to reflect an increase in market value of lumber products for each 3 (three)-month period, beginning on the first day of the quarter that the extension is granted. Increased stumpage rates for each subsequent 3 month period will be determined by dividing the bid price by the 3 (three) month average lumber price for Douglas-fir/western larch as reported by the Western Wood Products Association Inland Lumber Price Index for the period ending the quarter prior to granting the extension; that ratio is then multiplied by the average lumber price for the 3 (three) month period immediately preceding each adjustment to determine the stumpage rates to be charged for that period. When Western Wood Products Inland Lumber Price Indexes are revised to reflect updated grade recovery percentages, the new index values will be used in the escalation calculations.
 - d. No de-escalation will occur from the time the extension is granted by the Administrator, as documented in a signed modification, through the remainder of the Contract.
 4. An extension may be granted to the Purchaser without penalty if the State prohibits logging activity for more than 2 weeks during the operating period described in this Contract.
 5. All conditions of this contract shall remain in force during any period of extension, unless those conditions are amended by the terms of the extension.
 6. In the event the Contract terminates pursuant to Section I.C, TERM OF CONTRACT due to expiration of the time period within which its performance shall have been completed, and the Department has not granted an extension, the Purchaser shall immediately cease all operations within the Gross Sale Area as shown in Table 1. Operations beyond the contract termination date for which the Department has not granted an extension will be treated as trespass.
- G. LIABILITY FOR LOSS:** The Purchaser is responsible for loss, degradation, or damage to timber while the timber is in his, her or its custody, including but not limited to, timber which has been felled,

TIMBER SALE CONTRACT

skidded or decked and/or timber which has been lost, damaged or stolen after removal from the sale area but before scaling or weight is recorded.

H. SUPERVISION: When construction or harvesting operations are in progress, the Purchaser shall have exclusive control over the manner in which the Contract is executed if, as determined by the Department, the Purchaser has and is complying with all terms and conditions provided herein. Purchaser is required to have a supervisor(s) in charge of operations on the sale area at all times. Such supervisor(s) shall have authorization to receive notices from the Forest Officer and take appropriate action with regard to breach and/or violations of the terms and conditions of the Contract.

I. COMPLAINTS:

1. Complaints by the Purchaser concerning any action or decision of a Forest Officer, including suspension orders, must be made in writing to the Administrator postmarked within 30 days of the disputed action or decision. In the interim, Purchaser must comply with the directions of the Forest Officer.
2. Upon receipt of a complaint, the Administrator, or a designated representative, shall promptly hold an informal conference with the Purchaser and the Forest Officer to review the disputed action. The Purchaser shall be given adequate notice of the conference and shall be given the opportunity to present evidence and an argument to rebut the reasons given by the Forest Officer for the disputed action. After review, the Administrator shall notify the Purchaser in writing of his decision. The decision of the Administrator is final on behalf of the State, except regarding termination of the contract.

J. ASSIGNMENT: This contract shall not be assigned in whole or in part unless approved in writing by the Administrator.

K. MODIFICATIONS:

1. This contract, together with the attachments listed herein, contains the entire agreement of the parties and no statements, promises or inducements made by either party, or agents of either party, that are not contained in such written Contract shall be valid or binding. This Contract, except as described in Section I.K.2 below, cannot be enlarged, modified or altered except upon written agreement signed by all parties to this contract. Only the Administrator, his successor, his designated representative, or the Board of Land Commissioners, is authorized to enter into such modification on behalf of the State.
2. To protect cultural or natural resources the State may modify provisions of the Contract without prior agreement by the Purchaser. If such modifications occur the State will provide equitable compensation to the Purchaser for those modifications.

L. EQUAL EMPLOYMENT OPPORTUNITY: Pursuant to Section 49-3-207, MCA, any hiring by the Purchaser under this agreement must be on the basis of merit and qualifications and there must be no discrimination on the basis of race, color, religious creed, political ideas, sex, marital status, physical or mental handicap, national origin or ancestry by any person performing this Contract.

M. LIABILITY INSURANCE:

1. Prior to the commencement of any work to be performed under this Contract, the Purchaser or their agents shall obtain, carry and keep in good standing for the remainder of the contract period, with any extensions:
 - a. Comprehensive general liability insurance coverage to the limit of \$1,000,000.00 per occurrence and \$2,000,000.00 per aggregate. Each such policy shall include endorsements, which shall name the State as an additional insured and shall provide that the State shall be

TIMBER SALE CONTRACT

given 30 days written notice, at the address stated above, prior to cancellation or any material change in such policy.

- b. **Automobile Liability Insurance:** The Purchaser shall purchase and maintain coverage with split limits of \$500,000 per person (personal injury), \$1,000,000 per accident occurrence (personal injury), and \$100,000 per accident occurrence (property damage), OR combined single limits of \$1,000,000 per occurrence to cover such claims as may be caused by any act, omission, or negligence of the contractor or its officers, agents, representatives, assigns, or subcontractors.
2. In lieu of such coverage, the Purchaser may provide proof of self-insurance in at least an amount equal to that provided above.
3. Prior to the commencement of any work to be performed under this contract, Purchaser shall deliver to the State a certificate of insurance from the insurer(s) of the Purchaser or their agents certifying that coverage in at least the amounts stated above is in force. Such certificate shall be submitted to the State for approval of the insurer(s), the amount, and the form. The State reserves the right to require a certified copy of any such policy or to examine the policy itself.
4. A self-insured Purchaser shall provide an equivalent certificate of insurance subject to the approval of the State.
5. It is further understood and agreed that this Contract shall terminate immediately in the event that the mandatory liability insurance coverage required under this part is for any reason not obtained or is discontinued.

N. WORKERS' COMPENSATION INSURANCE:

1. Prior to the commencement of any work under this Contract, Purchaser shall provide written verification to the Administrator that any and all individuals who are to be engaged in work under this Contract, including but not limited to employees, agents or independent contractors of the Purchaser or of its subcontractors, are either insured for workers' compensation coverage or are exempted from such coverage as certified independent contractors pursuant to § 39-71-401 MCA.
2. It is expressly understood and agreed that no such individual may engage in work in furtherance of this Contract at any time during its period unless either insured for workers' compensation coverage or exempted from such coverage as indicated above.
3. It is understood and agreed that this Contract shall terminate immediately in the event that workers' compensation coverage or exemptions required under this part is discontinued for any individuals engaged in work under this Contract.

O. SAFETY: The Purchaser, employees, subcontractors and their employees shall conduct their activities in a safe and workmanlike manner, shall cooperate in making it possible for the Forest Officer to safely, efficiently, and economically perform his, her or its administrative duties, and shall comply with federal and State safety standards for logging operations as established by the United States Department of Labor, Occupational Safety and Health Administration (OSHA; 29 Code of Federal Regulations 1910 and any other such applicable regulations promulgated by OSHA) and as required by Title 50, Chapter 71 of the Montana Code Annotated, and any regulations promulgated to implement the statutes found in that Title and Chapter of the Montana Code Annotated. The Purchaser, and not the State, is responsible for instituting and maintaining all precautions, procedures and programs for the safety of all persons on the project site, and the State hereby disclaims any and all responsibility for injuries or accidents occurring at the site.

P. SAWMILLS PROHIBITED: No sawmills shall be allowed to operate on the gross sale area.

TIMBER SALE CONTRACT

Q. LOG CHIPPERS OR GRINDERS: No log chippers or grinders shall be allowed to operate on the gross sale area unless written approval to do so is granted by the Forest Officer. In order for approval to be granted, the Purchaser shall identify a method acceptable to the State for the measurement of all wood to be ground or chipped. If the Purchaser intends to operate a log chipper outside of the gross sale area, provisions must be made for obtaining certified weights of either the material removed from the sale or of the resultant products.

R. SALE DELAYED OR PRECLUDED BY JUDICIAL ACTION OR GOVERNMENT REGULATORY ACTION:

1. In the event judicial action, change in applicable law, or implementation of government regulatory action renders proceeding with this contract unlawful, the State will suspend or terminate the Contract in whole or in part. Upon notice of such suspension or termination, Purchaser shall immediately cease all or any portion of such operations under the Contract as directed by the State. If a court of competent jurisdiction has entered a final judgment rendering further proceeding with this Contract unlawful, or government regulatory action takes effect, the State may terminate the Contract or, at the State's option, suspend the Contract in whole or in part, pending appeal of the court's final judgment. If the Contract is suspended, the State shall not be liable to the Purchaser for damages or losses resulting from the delay. In the event the Contract is terminated due to judicial action, a change in law, or government regulations, the State shall be liable to Purchaser only as follows:
 - a. The State shall refund any portion of advance stumpage payments or down payments not needed to compensate the State for timber removed.
 - b. The State shall release any portion of the performance bond not needed to compensate the State for timber removed or other losses suffered by the State due to breach of contract by the Purchaser.
 - c. The State shall reimburse the Purchaser for the portion of reasonable costs of constructing or improving roads or of installing other facilities on State lands pursuant to this Contract that the Purchaser has not been able to use for removing timber. The Purchaser shall provide documentation requested by the State of the Purchaser's actual costs of constructing or improving such roads or installing other improvements.

S. VENUE AND CHOICE OF LAW: In the event of litigation concerning this agreement, venue shall be in the First Judicial District, Lewis and Clark County, Montana, and this agreement shall be governed by the laws of the State of Montana both as to interpretation and performance.

T. AUTHORIZATION TO ENTER: The Purchaser is authorized to enter the sale area only for purposes related to the performance of this Contract.

U. USE BY OTHERS: The State reserves the right to issue timber permits or other permits on the sale area for forest products not included in this Contract or for other uses not in conflict with this Contract. The State also reserves the right to permit other persons to cross the sale area to gain access to other lands for fire suppression or for other purposes. Where the Purchaser improves or reconstructs an existing road, the use thereafter by the Purchaser shall accommodate safe use by others.

V. OTHER OPERATIONS BY THE STATE: The State reserves the right to at any time conduct within the gross sale area forest management operations including, but not limited to, slash piling, burning, handwork, broadcast burning, mop-up, patrolling, thinning and tree planting during the term of this Contract.

W. INDEMNITY AND LIABILITY:

1. The Purchaser agrees to indemnify the State, its officials, agents, and employees, while acting within the scope of their duties and hold the State harmless from and against all claims,

TIMBER SALE CONTRACT

demands, and causes of action of any kind or character, including the cost of defense, arising in favor of the Purchaser's employees or third parties on account of bodily or personal injuries, death or damage to property arising out of services performed, goods or rights to intellectual property provided or omissions of services or in any way resulting from the acts or omission of the Purchaser and/or its agents, employees, subcontractors or its representatives while engaged in work under this Contract, all to the extent of the Purchaser's negligence.

2. The Purchaser shall be responsible for, indemnify, defend and hold the State harmless from and against any loss, cost (including, without limitation, reasonable legal, accounting, consulting, engineering and similar expenses), damage, claim, fine or liability, including the necessity for tests, inspections or other work, and any damage, claim, fine or liability arising as a result of such tests, inspections or other work, the State must perform:
 - a. Based upon an actual or alleged violation by the Purchaser of, or failure by the Purchaser to comply with, any Environmental Law during the term of this Contract;
 - b. Arising from the discharge, release, threatened release, handling, storage, treatment, deposit or disposal of any Hazardous or Deleterious Substances caused or exacerbated by the activities of the Purchaser on or in the gross sale area during the term of this Contract; or
 - c. Otherwise arising out of or in connection with any environmental condition or action caused or created by the Purchaser.

X. OTHER LAWS AND REGULATIONS: This Contract is subject to all applicable federal, state, county, and municipal laws, ordinances, and regulations in effect at the date of this Contract or which may, from time to time, be adopted, and which do not impair the obligations of this Contract and which do not deprive the Purchaser of an existing property right recognized by law. A violation by the Purchaser of any federal, state, county, and/or municipal laws, ordinances and/or regulations while conducting operations under the terms of this Contract, shall, in the discretion of the State, constitute sufficient reason for the suspension or termination of this Contract. If any part of the lands or premises under this Contract are used or allowed or permitted to be used for any purpose contrary to the laws of this state or the United States, such unlawful use shall, in the discretion of the State, constitute sufficient reason for the suspension or termination of this Contract.

Y. FORCE MAJEURE: Neither party shall be responsible for failure to fulfill its obligations due to causes beyond its reasonable control, including without limitation, acts or omissions of government or military authority, acts of God, materials shortages, transportation delays, fires, floods, labor disturbances, riots, wars, terrorist acts, or any other causes, directly or indirectly beyond the reasonable control of the nonperforming party, so long as such party is using its best efforts to remedy such failure or delays. Force majeure will not relieve the Purchaser from liability for damage or otherwise excuse performance of this Contract should the Purchaser cause a fire for which they would be liable under § 50-63-103, MCA.

II. CHARGES AND PAYMENTS

A. PERFORMANCE BOND:

1. As a guarantee of the faithful performance of this Contract, Purchaser shall furnish a bond, with sufficient sureties, to the State in an amount equal to the potential loss to the State in the event of Purchaser's breach or default under the terms of this Contract as determined by the Administrator. The performance bond may be in cash, bond, irrevocable letter of credit, or certificate of deposit with sufficient sureties. A letter of credit must be automatically renewable without amendment for the term of the contract. The bond shall not be less than five percent (5%) of the estimated value of the timber sold. The performance bond the Purchaser must submit for this contract is shown in Table 1.

TIMBER SALE CONTRACT

2. Upon full performance of the terms of the Contract, the State shall release the performance bond.
3. Upon substantial performance of the terms of the Contract, the Administrator may release a portion of the performance bond not needed to compensate the State for any remaining timber to be removed or any other losses that may be suffered by the State due to breach of Contract by the Purchaser. The bond shall not be reduced to less than five percent (5%) of the estimated value of the total Contract volume.

B. PAYMENTS: The Purchaser agrees to make payments to the Treasurer of the State of Montana as follows:

1. **ADVANCE STUMPAGE PAYMENTS:** The Purchaser is required to pay for all timber in advance of cutting at the rates shown in Table 1. Advance stumpage payments will be held by the State to cover the Purchaser's estimated timber cutting for at least six (6) weeks of operations. Advance stumpage payments may be reduced just before completion of the sale or when cutting requirements are to be suspended for at least 3 months. Advance stumpage payments may be in cash, bond, irrevocable letter of credit, or certificate of deposit with sufficient sureties.
2. **INITIAL ADVANCE STUMPAGE PAYMENT:** The initial advance payment will be made by the Purchaser prior to the start of timber cutting operations.
3. **PAYMENT SCHEDULE:** Payments in full for individual invoices will be made by the Purchaser as called for by the Administrator; in no event will payments be made by the Purchaser more than 14 days from the date of billing.
4. **FOREST IMPROVEMENT PAYMENTS:** The Purchaser is required to pay a fee for Forest Improvement on all sawlogs cut, both live and dead. The Forest Improvement fee for this sale is shown in Table 1. The Purchaser agrees to make these payments in 6 installments. The first 5 payments will be calculated using this formula: [Forest Improvement fee per ton times total estimated tons divided by 6]. The final payment will be made in conjunction with the final sale billing. The amount of the final billing will be adjusted to reflect payment due based on the actual sale weight. The Purchaser will be billed quarterly for the 5 payments on or about the first day of January, April, July and October. Payments will start on the first quarterly billing date after award of the sale. If the sale is completed before all of the Forest Improvement payments have been made, the Purchaser will be billed for the balance owed.

C. ROAD USE AND MAINTENANCE PAYMENTS:

1. **PAYMENTS:** The Purchaser is required to make payments for road use and maintenance at the rates listed in Table 1 or as amended by revisions to road use permits. Payments will be made as called for by the Administrator or as otherwise directed in this contract.
2. **ALTERNATE HAUL ROUTES:** The Purchaser is authorized by the State to use the haul route described in this contract and attachments. If the Purchaser chooses to use an alternate haul route, that haul route must be approved by the State. Road use charges, maintenance requirements and payments may be adjusted to reflect the haul route used by the Purchaser. The Purchaser is responsible for obtaining any right-of-way required for an alternate haul route and for meeting all requirements of any agreements associated with that right-of-way. Proof of any such agreement must be provided to the State prior to use. Stumpage fees and Forest Improvement fees are not subject to a downward adjustment under this clause.

III. MEASUREMENT AND LOG ACCOUNTABILITY

A. PRODUCT MEASUREMENT:

1. The State will determine the value of products removed from the sale based on the total gross weight of material hauled. Weight tickets will be used to obtain the total value.
2. When mixed products with different payment rates per ton are hauled on one load, the entire load will be charged at the rate of the product with the highest value contained in the load.
3. Upon request by the State, the most recent load delivered to a receiving mill must be made available for inspection by the State or their representatives. The weight ticket identifying the load must remain affixed to the load.

B. WEIGHT TICKETS: The Purchaser is required to furnish weight tickets to the State as agreed to by the Forest Officer and the Purchaser.

1. All weight tickets shall be mailed or delivered with corresponding load tickets, as outlined below, directly to the DNRC Unit or Land Office administering this contract. In this case, send truck tickets to **DNRC Swan Unit, 34925 MT Hwy 83, Swan Lake, MT 59911**. This requirement may be waived or changed by the Forest Officer.
2. Weight tickets shall show gross, tare and net weights and the corresponding load ticket number of each product load. Weight tickets must be from State of Montana certified scales, and all weight tickets must have mechanically stamped weights for the gross and tare weights unless otherwise permitted in writing by the Forest Officer. Weight tickets will be mailed or delivered to the State on a bi-weekly basis or as otherwise agreed to by the Forest Officer. A weight ticket will be considered as missing if not furnished within 4 weeks of the load delivery date. Failure to comply with this provision may be treated by the State as a contract violation.
3. Truck ticket information may be provided to DNRC electronically if all required ticket information is provided. Contact Forest Product Sales Supervisor (406) 542-4276 at the Forest Management Bureau to implement electronic transfer. The information must be provided to the State on a bi-weekly basis prior to the tenth (10th) and twenty-fourth (24th) of each month. The paper copy of the weight tickets must also continue to be provided to the State. The requirement to supply the paper copy of the weight tickets may be waived by the Administrator.

C. LOAD TICKETS: The Purchaser will be issued load ticket books with consecutively numbered tickets for uniquely identifying truckloads of logs. A load ticket shall be attached to the driver's side bunk log of each product load prior to hauling, with the Scaler's copy given to the State from the delivery point. The Purchaser shall complete each ticket with the sale information required by the State. The Purchaser shall provide to the Forest Officer a complete list of destinations to which loads will be delivered. The State, at its discretion, may require a separate ticket book for each destination. Failure to comply with this provision may be treated by the State as a contract violation.

D. SORTING OF PRODUCTS: The State may require separate ticket books for any loads sorted by the Purchaser by size or species or by specific products intended for different delivery points. Load tickets designated for a specific product must only be used for that specific product. When a load ticket is used with an incorrect product the State may treat such misuse as a contract violation

E. LOAD MARKING: The Purchaser is required to mark all loads of logs before removal from the loading area to assist in identification while in transit or at the point of delivery. Marking shall be accomplished by painting "ST" in blue paint and the last three digits of the truck load ticket number on log ends of at least three logs on each load, both front and back. The driver's side bunk log shall be one of the marked logs. Failure to comply with this provision may be treated by the State as a contract violation.

F. PROMPT DELIVERY: The Purchaser will deliver loads from the timber sale area to a receiving log yard directly without diversion. "Over-nighting" loads during transit are expressly forbidden unless approved by Forest Officer prior to hauling. Failure to comply with this provision may be treated by the State as a contract violation.

G. SCALE RULE:

1. Any sawlogs scaled by the State shall be scaled using the Scribner Decimal "C" log rule. Log scaling will follow the procedures listed in the National Forest Log Scaling Handbook (FSH 2409.11) excluding Region 1 supplements.
2. In cases where conversion is required, a conversion factor of **5.72** tons per thousand board feet will be used for sawlogs.

IV. CONTRACT VIOLATIONS AND PENALTIES

A. SUSPENSION:

1. **FAILURE TO PAY ADVANCE STUMPAGE:** If Purchaser fails to submit advance stumpage payments as directed by the Administrator pursuant to the terms of this Contract within 30 days of the request for such payments, all operations covered by this Contract shall immediately cease upon written or oral order from the State until all required advance stumpage payments, or guarantee of payment satisfactory to the State, have been made. The cutting and removal of timber may resume only upon receipt of written notice to the Purchaser from the State that acknowledges adequate payment or guarantee.
2. **LOSS OF BOND:** If the surety bond or other bond securing performance of this Contract is canceled or otherwise becomes ineffective, operations covered by this Contract shall immediately cease upon written or oral order from the State to the Purchaser. Cutting and removal of timber may resume only upon receipt of written notice from the State that acknowledges adequate bond.
3. **OTHER CONTRACT VIOLATIONS:**
 - a. Should the Forest Officer observe a condition that violates the terms of this Contract, the Forest Officer may verbally notify the Purchaser or its employees or subcontractors of such condition and immediately suspend all or part of the operations in the sale area to prevent harm to the interests of the State or the public. Should the Purchaser or its employees or subcontractors fail to comply with any verbal suspension order, the Administrator may terminate the Contract pursuant to Section IV. B. Termination. The Forest Officer may rescind his/her verbal suspension order upon satisfactory cure of the Purchaser's violation and operations may resume.
 - b. Suspension orders may be given in writing or verbally to the Purchaser, or to his, her or its employees or subcontractors. Once given, the Purchaser, and his, her or its employees or subcontractors shall immediately comply with such order of suspension and failure to do so shall constitute grounds for termination of this Contract. Suspension orders are reviewable under the provisions described in Section I.I. COMPLAINTS.
 - c. The Administrator may issue a written notice of suspension depending upon the severity of the violation and Purchaser's ability to cure. Such notice shall contain information regarding:
 1. The breach observed and harm anticipated;
 2. The contract provisions violated;
 3. If possible, the measures required to cure the violation and allow operations to resume; and
 4. The deadline within which the Purchaser must cure the violation.Should the Purchaser fail to cure the violation as required, or to obtain a written variance from the Administrator, the Administrator may charge the Purchaser a \$250 per day penalty for every day that the violation persists. Operations may resume only upon written notice from the Administrator. If

TIMBER SALE CONTRACT

satisfactory measures or remedies cannot be found to cure the violation, the Administrator may immediately terminate the Contract pursuant to Section IV.B. TERMINATION.

B. TERMINATION:

1. Gross or persistent contract violations and/or failure to promptly and properly remedy contract violations by the Purchaser pursuant to the terms of this Contract shall be grounds for termination of the Contract by the State.
2. If this Contract is terminated by the State, the Administrator shall immediately notify the Purchaser of the termination and the reasons for it by certified mail. Such notice shall describe in what respects the Contract has been breached, the means, if any, by which the breach can be remedied and the consequences of such termination. The Contract shall be terminated 18 days from the date the notice is mailed to the Purchaser at the address stated in this Contract.
3. Upon receipt of the notice of termination the Purchaser shall immediately cease all operations pursuant to and permitted by the contract until the termination is resolved as provided pursuant to this Section of the Contract, Section IV.B. TERMINATION.
4. The Purchaser has 18 days after mailing of the notice of termination within which to file with the State a notice of appeal for a hearing before the Board of Land Commissioners or its appointee. If a timely notice of appeal is filed, the Contract remains in effect until the decision of the Board, but any suspension order shall remain in effect in the interim. The Board or its appointee shall conduct an informal open hearing to determine whether the Contract should be reinstated.
5. If the Contract is reinstated the Purchaser will not be penalized for any delays that resulted from the appeal.
6. If the Contract is terminated for breach and not reinstated, it is understood that the State may refuse to accept bids or proposals submitted under 77-5-212 MCA from the Purchaser on future State timber sales and permits for a minimum period of 2 years.

C. LIABILITY FOR DAMAGES:

1. The Purchaser shall be liable for any damages sustained by the State arising from Purchaser's breach of the terms of this Contract and the State may cause all or part of the performance bond to be forfeited to recover such damages.
2. In the event that a portion of the timber sale under this Contract is resold as a result of the Purchaser's forfeiture and the stumpage rate pursuant to the resold contract is lower than the stumpage rate provided herein, the difference between the original rate and the new rate shall be considered damages and the Purchaser shall be liable to the State for those damages. The State may cause all or part of the Purchaser's performance bond to be forfeited to recover such damages.

D. STATE'S OPTION TO COMPLETE CONTRACT REQUIREMENTS: If the Purchaser fails to complete the requirements described in this Contract in a timely manner or if the Contract is terminated pursuant to Section IV.B. TERMINATION, the State reserves the right to complete the work itself or through a contractor. The Purchaser will be billed for any additional costs incurred by the State due to the Purchaser's failure to perform the requirements of this Contract. These additional costs may include State employee time and expenses that were extraordinary to the normal administration of the contract, such as time and expenses incurred to hire a replacement contractor. Purchaser's failure to make payment within 14 days from the date of billing may cause all or part of the performance bond to be forfeited to recover such costs.

E. WAIVER OF PENALTIES: The penalties specified in this section shall be regarded as liquidated damages and may be waived or reduced at the discretion of the Administrator in exceptional cases.

TIMBER SALE CONTRACT

F. FOREST PRACTICES LAWS: The Purchaser shall conduct logging operations in compliance with all laws relating to forest practices in the State of Montana. The Purchaser shall be responsible for all reclamation and penalties that result from violations of applicable forest practices laws.

G. LOGGING REQUIREMENT VIOLATIONS:

1. **HIGH STUMPS:** The Purchaser may be charged \$25.00 for each tree stump cut higher than 12 inches on the side adjacent to the highest ground except in unusual cases when this height is not considered practical.
2. **LONG BUTTS:** The Purchaser may be required to pay \$25.00 per long butt for cutting long butts that contain useable material in excess of the minimum net scale in percentage of gross shown in Table 2.
3. **LARGE TOPS:** The Purchaser may be required to pay for cutting tops larger than the Top Diameter Inside Bark (DIB) shown in Table 2. This charge will be at the current contract rate for the net volume by species, or \$25.00 per large top, whichever is greater.
4. **UNDESIGNATED TREES:**
 - a. Undesignated or reserve trees that are cut or damaged as a result of Purchaser's operations shall be considered cut in trespass and the Purchaser may be charged three times the highest Contract stumpage rate (minimum \$10.00/ton) for the Contract product class(es) the tree contains.
 - b. If the Forest Officer determines that a suitable replacement for a reserve tree as described above is not available, Purchaser agrees to pay the State \$500.00 per tree, in addition to the rates charged in Section IV.G.4.a. UNDESIGNATED TREES.
5. **FAILURE TO REMOVE:** The State may charge the Purchaser for trees that are designated for cutting under the terms of this contract and/or logs that meet the Manufacturing and Recovery Standards shown in Table 2 that are not removed from the sale area or presented for measurement. This charge may be up to triple the Contract stumpage rate plus the Forest Improvement rate for the class of material contained in those trees fixed in accordance with the terms of this Contract. If the State removes such material from the sale area, the Purchaser will be required to reimburse the State for all applicable cutting, yarding, processing, loading and hauling costs.
6. **LOSS IN WEIGHT DUE TO PURCHASER DELAY:** A 15% increase in net weight of logs may be added by the State for loss in weight due to delay by the Purchaser in delivering cut logs to the manufacturing point. A delay is defined as in excess of 30 days after felling.

H. MEASUREMENT AND LOG ACCOUNTABILITY VIOLATIONS:

1. **MISSING LOAD TICKETS:** The Purchaser will be charged up to \$500.00 for each unused load ticket that the Purchaser has lost or misplaced while in his, her or its possession. An unused ticket is defined as a ticket that is not turned into the State with an associated truckload weight.
2. **FAILURE TO ATTACH OR COMPLETE LOAD TICKET:** The Purchaser may be charged \$500.00 per load for failure to attach a load ticket to each product load prior to hauling, or for failure to complete the load ticket with all required information.
3. **MISSING WEIGHT TICKETS:**
 - a. The Purchaser may be charged triple the Contract stumpage rate plus the Forest Improvement rate $[(\text{stumpage} + \text{FI}) \times 3 = \text{penalty}]$ for each truck weight ticket not furnished to the State.

TIMBER SALE CONTRACT

- b. The Forest Officer will notify the Purchaser of each missing weight ticket.
 - c. The load weight will be determined by averaging weights from other loads hauled by the Purchaser to the same mill within the same billing period, or 30 tons for single loads and 38 tons for loads with a pup trailer attached.
 - d. For Other Material, as defined by this Contract, the minimum stumpage for purposes of penalty shall be \$10.00 per ton or the Contract stumpage rate multiplied by 3, whichever is higher. The Forest Improvement fee is not included in Other Material penalties.
4. **IMPROPERLY LABELED PRODUCT:** The Purchaser may be charged \$500.00 per load for loads with an incorrect load ticket for the product (Sawlog or Other Material) in the load. In addition, the stumpage paid for an improperly ticketed load shall be at the highest Contract stumpage rate for products hauled pursuant to this Contract.
5. **IMPROPERLY MARKED LOADS:** The Purchaser may be charged forty dollars (\$40.00) per load for each load not marked in accordance with Section III.E. LOAD MARKING.
- I. **FAILURE TO MEET COMPLETION DATES:** The Purchaser may be charged \$100.00 for each complete calendar day the Purchaser fails to meet the deadlines shown in Table 3 and Table B1.
- J. **LATE PAYMENTS:** The Purchaser may be charged \$100.00 per day beginning the 15th day after the billing date for failure to pay for forest products, pursuant to Section II.B PAYMENTS.

V. FIRE PROTECTION

- A. **FIRE REGULATIONS:** The Purchaser is required to conduct all operations in accordance with the Montana Forest Fire Regulations, Attachment C.
- B. **FIRE PREVENTION:** During the time that this Contract remains in force, the Purchaser shall, to the greatest extent practicable, prevent forest fires on the area described in this Contract and in its vicinity, and shall require all employees, contractors and employees of contractors to do likewise.
- C. **OPEN BURNING REQUIREMENTS:** The Purchaser is required to conduct any burning of slash or other debris in accordance with the Montana Department of Environmental Quality open burning restrictions. The Forest Officer must be notified prior to the start of any burning operations.
- D. **FIRE SUPPRESSION:** Unless prevented by circumstances over which he, she or it has no control, the Purchaser shall place qualified employees, contractors and employees of contractors and all equipment at the disposal of any authorized State, County, or Federal Forest Officer for the purpose of fighting forest fires. Payment for such services shall be made at rates to be determined by the Forest Officer, which shall be within a range of payment rates shown in the Interagency Incident Business Management Handbook, NWCG Handbook 2. Any employees or equipment furnished by the Purchaser, contractors or employees of contractors, shall be relieved from fire fighting as soon as it is practicable for the Forest Officer to obtain other adequate labor or equipment.
- E. **FIRE COSTS:** The costs borne by the State for suppressing fires that are intentionally lit by the Purchaser or that are caused by negligence or fault in the Purchaser's operations shall be paid by the Purchaser to the State. The Purchaser shall also be liable for property and resource damage resulting from these fires.
- F. **FIRE REPORTING:** Any wildfires, which the Purchaser detects or suppresses, must be reported as soon as possible to the responsible fire protection agency and the Department.
- G. **SUSPENSION OF OPERATIONS:** When fire danger reaches extreme levels that cause operations to be curtailed through Stage II, Hoot Owl requirements or other measures, the State may suspend

operations until fire conditions in and/or around the sale area improve. The State will grant a contract extension to compensate for the time suspended.

- H. CONTACT INFORMATION:** The Purchaser will provide the Forest Officer with phone numbers of the Purchaser and their employees and contractors when logging operations are in progress (including nights and weekends), in order to establish contact if a wildfire occurs within the sale area or on other lands accessed by road systems associated with the sale.

VI. RESOURCE PROTECTION

- A. DAMAGE PREVENTION:** The Purchaser shall use reasonable skill and care in all operations to prevent damage to soils, trails, meadows, stream banks, stream channels, wetlands, lakeshores or other natural features of the sale area.

B. STREAM PROTECTION:

1. Construction and logging equipment will not be operated in Streamside Management Zones. An exception may be provided for through this Contract or the Forest Officer may grant written permission. Additional protection measures may be required in Section VII.G, SPECIAL OPERATING REQUIREMENTS and in Contract Attachments.
2. The Purchaser shall notify the Forest Officer immediately if debris from logging or construction enters a stream or stream channel.
3. The Purchaser shall remove any debris resulting from logging or construction operations, which may affect the natural flow of any streams traversing the sale area. This work will be completed in a manner that causes the least disturbance to the streams, as directed by the Forest Officer.
4. Logs shall not be hauled, skidded or yarded across streams unless the logs are fully suspended, or otherwise yarded as specified in this Contract. The Forest Officer must approve all logging and construction plans, including changes, before implementation.
5. All operations shall be conducted in a manner to comply with Montana Water Quality Standards, the Streamside Management Zone Law, and all applicable permits.

- C. CULTURAL RESOURCES:** If a cultural resource is discovered, the Purchaser shall immediately suspend all operations in the vicinity of the cultural resource and notify the Forest Officer. Operations may only resume if authorized by the Forest Officer. Cultural resources identified and protected elsewhere in this contract are exempted from this clause. Cultural resources, once discovered or identified, are not to be disturbed by the Purchaser, or his, her or its employees and/or sub-contractors.

D. DISCOVERY OF THREATENED AND ENDANGERED SPECIES:

1. If a specific habitat feature for a federally listed threatened or endangered species is encountered, the Purchaser shall suspend all operations in the vicinity of the observation or discovery and immediately notify the Forest Officer. Operations may resume only if authorized by the Forest Officer. Habitat features identified and protected elsewhere in this contract are exempted from this clause.
2. If a federally listed threatened or endangered species is encountered, the Purchaser shall immediately notify the Forest Officer. The Purchaser may be required to suspend operations in the vicinity of the observation or discovery. If suspended, operations may resume only if authorized by the Forest Officer.

TIMBER SALE CONTRACT

- E. SANITATION:** The Purchaser's operations, as described by this contract, shall comply with all applicable State laws, rules and regulations concerning sanitation in operations. Refuse resulting from the Purchaser's activities, including the use, servicing, repair, or abandonment of equipment, shall be removed, buried or otherwise disposed of in a manner that complies with all State laws and meets the approval of the Forest Officer. The Purchaser shall not service tractors, trucks and similar pieces of equipment on lands that directly drain into or are within 100 feet of lakes, streams or recreational facilities. No logging camp will be located on the gross sale area without prior approval by the Forest Officer.
- F. HAZARDOUS SUBSTANCES:** In addition to the indemnification provided in Section I.W.2. INDEMNITY AND LIABILITY, with respect to Hazardous Substances, the following duties shall apply:
1. The Purchaser shall know and comply with regulations governing the storage, handling, application, disposal, and reporting of pesticides, herbicides, containers, biological waste, petroleum products, dust abatement compounds, and other hazardous substances. The Purchaser shall obtain the approval of the Forest Officer to store, handle, apply or dispose of these substances on State land.
 2. The Purchaser shall not transport, handle, store, load, apply, or dispose of any hazardous substance in such a manner as to pollute water supplies or waterways, or cause damage or injury to people, land, desirable plants, and animals.
- G. PROTECTION OF IMPROVEMENTS:** The Purchaser shall to the greatest extent practicable protect from damage all gates, signs, telephone lines, power lines, fences, irrigation ditches, cattle guards, drainage structures, road improvements, and any other improvements or infrastructure within the gross sale area and/or along haul routes. Damages caused by the Purchaser, his, her or its employees or subcontractors, and expenses associated with the repair or replacement of damaged structures and improvements are the sole responsibility of the Purchaser.
- H. PROPERTY CORNER RESTORATION:** The Purchaser is required to replace any General Land Office township, section, quarter or meander corners, monuments or witness trees on or adjacent to the timber sale area which may have been moved, disturbed or lost, as a result of the Purchaser's logging or construction operations. Any necessary replacements must be carried out by a licensed surveyor at the Purchaser's expense.
- I. PASSABLE ROADS:** The Purchaser will leave all roads and trails free from obstruction by logs, brush or debris following the completion of logging operations. Temporary or permanent obstructions may be acceptable if approved by the Forest Officer.
- J. NOXIOUS WEED MANAGEMENT:** All equipment used in road construction and off-road logging activity must be pressure-washed by the Purchaser and inspected by the Forest Officer prior to entering the sale area. This cleaning will remove all dirt, plant parts, and material that may carry noxious weed seeds into the sale area. Other equipment and vehicles entering and leaving the sale area shall be cleaned prior to start up and kept reasonably clean during the course of operations. All subsequent move-ins of logging and construction equipment shall be treated the same as the initial move-in.
- K. WILDLIFE PROTECTION:**
1. The Purchaser is authorized to enter areas closed by gates, barricades or berms with motorized vehicles only for the purposes related to the performance of this contract. Motorized vehicle entry for purposes other than contract performance, such as hunting or transporting game animals will be considered trespass and prosecuted to the fullest extent of the law (Montana Code Annotated § 45-6-203).
 2. The Purchaser is prohibited from carrying firearms while conducting contract operations [ARM 36.11.432(1)(m); 36.11.433(1)(d); 36.11.443(2)].

TIMBER SALE CONTRACT

3. The Purchaser will store human or pet food, livestock food, garbage, and other attractants in a bear-resistant manner.
4. The Purchaser will not bury or discard attractants in the sale area, or burn attractants (such as food leftovers) in an open campfire.
5. The Purchaser will provide each employee with a copy of Attachment D "Working in Bear Habitat" Brochure.

VII. LOGGING

A. TREES DESIGNATED FOR CUTTING: All trees meeting the following requirements must be cut by the Purchaser.

1. **TREES IN UNITS:** Trees that meet the Minimum Log Size of Trees Designated for Cutting in Table 2 are to be cut in each unit according to the Marking specifications shown in Section VII.F. **UNIT DESIGNATIONS.**
2. **RIGHT-OF-WAY TREES:** All trees within road right-of-way boundaries must be cut.
3. **DAMAGED TREES:** Reserved trees, which are root-cut, damaged by felling or skidding, uprooted or broken off by the Purchasers operations may be designated for cutting by the Forest Officer. The Forest Officer may mark additional reserve trees to replace those that have been cut or damaged.
4. **FIRE KILL, INSECT INFESTATIONS AND WIND THROWN:** The Purchaser may be required to cut and remove at current contract rates, fire-killed, high hazard, disease infected, insect-infested or wind thrown (defined as blown down or wind-damaged to the extent that the tree is expected to fall or is dying) trees that occur in any part of the gross sale area while this Contract is in effect, if the Forest Officer determines that the stumpage value per ton of the additional timber is approximately equal to the value of the timber being harvested under this Contract .

B. TREES RESERVED FROM CUTTING:

1. **LEAVE TREES:** Trees, both live and dead, marked to leave or otherwise described to leave are reserved from cutting. Any trees not specifically required to be cut are reserved from cutting.
2. **BOUNDARY AND BEARING TREES:** Trees marking the boundaries of ownership, logging units, equipment restriction zones, streamside management zones, road rights-of-way, and bearing trees, are reserved from cutting unless otherwise designated by this contract or by the Forest Officer.
3. **VALID CLAIMS:** Timber to which there exists a claim under valid contracts with the State of Montana is exempted from this sale.

C. LOG MANUFACTURING AND RECOVERY STANDARDS:

1. **SAWLOG STANDARDS:** Trees cut by the Purchaser shall be manufactured to secure the maximum utilization of forest products according to III.G.1. All logs that meet or exceed the Manufacturing and Recovery Standards in Table 2 and this section shall be skidded to landings and hauled by the Purchaser.
 - a. Logs shall be bucked to utilize the entire length of the tree to the top diameter specified under Manufacturing and Recovery Standards in Table 2.

TIMBER SALE CONTRACT

- b. Logs meeting utilization specifications in Table 2 shall be manufactured in such a manner as to minimize waste during bucking operations.
 - c. A tree or log larger than 5.6” top DIB is considered to be a sawlog if it contains Scribner Decimal C Net Scale \geq 33% of Gross.
2. OTHER MATERIAL: The Purchaser may elect to remove other material that does not meet Sawlog Manufacturing and Recovery Standards in Table 2, only if approved by the Forest Officer. Such products shall be billed at the rate for other material shown in Table 1.
- a. All contract provisions apply to the removal of Other Material.
 - b. Other Material that has been manufactured by the Purchaser shall be decked and hauled separately from sawlogs. All decked non-sawlog material must be hauled, or disposed of by the Purchaser in accordance with instructions of the Forest Officer. All hauled loads will have a truck ticket assigned and will meet the specifications in Section III, MEASUREMENT AND LOG ACCOUNTABILITY.
 - c. Butt cut logs (the first log cut above the stump) that meet LOG MANUFACTURING AND RECOVERY STANDARDS in Table 2, but do not meet TREES DESIGNATED FOR CUTTING minimum top DIB and length, may be considered as Other Material, not sawlogs.
3. DOWN WOODY MATERIAL: **10 to 15** tons per acre of downed woody material larger than 3 inches in diameter shall be left scattered throughout the sale units. The Forest Officer will determine the appropriate amount of material and may designate pieces to be left for this purpose that would otherwise be skidded and hauled under Sections VII.C.1 or VII.C.2, LOG MANUFACTURING AND RECOVERY STANDARDS.
4. NUTRIENT RETENTION: Removal from the site of fine branches and leafy material shall be minimized.
5. SNAGS: The purchaser will retain a minimum of **2** snags per acre and **2** recruitment trees per acre that are >21 inches dbh within each harvest unit unless superseded by Section VII.F, UNIT DESIGNATIONS. If snags and recruitment trees of this size class are not available, the next largest available size class shall be retained. If snags present human safety concerns, the purchaser may substitute snag recruits for snags upon approval of the Forest Officer. Snags cut for safety purposes shall remain in the unit.

TABLE 2.					
PRODUCT	TREES DESIGNATED FOR CUTTING		SAWLOG MANUFACTURING AND RECOVERY STANDARDS		
	The Purchaser must fell all trees marked or designated for cutting that contain a log of this minimum size.		The Purchaser must skid and haul all sawlogs that meet this minimum specification.		
	Top DIB	Length	Top DIB	Length	Sawlogs meeting standards in Section VII.C.1.b through c
Sawlogs	5.6”	16.5’	5.6”- 8.5”	10.5’	
Non-sawlogs	2.5”	20’	8.6”+	8.5’	

D. TREE AND BOUNDARY MARKING:

1. TREES MARKED TO CUT: **N/A**
2. TREES MARKED TO LEAVE: Marked with a horizontal **PURPLE** paint mark at Diameter Breast Height (DBH) and a mark below stump height.
3. HARVEST UNIT BOUNDARIES: Marked with three horizontal **BLUE** paint stripes facing into the unit.
4. ROAD RIGHT-OF-WAY BOUNDARIES: Marked with **YELLOW** paint spots facing toward the road centerline.
5. PROPERTY BOUNDARIES: Marked with **RED** blazes and **RED** flagging.
6. STREAMSIDE MANAGEMENT ZONES: The State has marked with fluorescent **ORANGE** flagging stenciled with "STREAMSIDE MANAGEMENT ZONE".
7. EQUIPMENT RESTRICTION ZONES: Marked with **PINK AND BLACK** striped flagging.

E. HARVEST SCHEDULE: The purchaser must cut and remove trees from the sale or portions of the sale, such as units, by the dates shown on the HARVEST COMPLETION SCHEDULE, Table 3:

TABLE 3. HARVEST COMPLETION SCHEDULE		
Priority	Unit or Portion of Sale	Completion Date
1	ALL	March 15, 2019
2	PILING AND SCARIFICATION	August 1, 2019

F. UNIT DESIGNATIONS: The following requirements are to be performed by the Purchaser in the harvest units listed below and as shown on the sale map, Attachment A. Paragraph headings refer to paragraphs listed in Section VII.G, SPECIAL OPERATING REQUIREMENTS.

HARVEST UNIT NUMBER(S)	ACRES	ESTIMATED VOLUME (Tons)
9-07	10	796
YARDING METHOD: Ground based equipment		
MARKING: Leave tree marked with a purple horizontal ring at dbh and a stump mark		
OPERATING PERIOD: Award of contract – March 15, 2017; June 16, 2017 – March 15, 2018; November 16, 2018 – March 15, 2019.		
SPECIAL OPERATING REQUIREMENTS: <ol style="list-style-type: none"> 1. RETAIN MINIMUM TWO SNAGS PER ACRE 6. ADDITIONAL TREES TO CUT OUTSIDE UNIT BOUNDARY 8. SLASHING OF LOGGING-DAMAGED TREES REQUIRED 9. PURCHASER SLASH PILING AND SCARIFICATION 10. OTHER MATERIAL 12. RESERVED SUBMERCHANTABLE TREE PROTECTION 		

TIMBER SALE CONTRACT

HARVEST UNIT NUMBER(S)	ACRES	ESTIMATED VOLUME (Tons)
9-13	61	4,853
YARDING METHOD: Ground based equipment		
MARKING: Leave tree marked with a purple horizontal ring at dbh and a stump mark		
OPERATING PERIOD: Award of contract – March 15, 2017; June 16, 2017 – March 15, 2018; November 16, 2018 – March 15, 2019.		
SPECIAL OPERATING REQUIREMENTS: <ol style="list-style-type: none"> 1. RETAIN MINIMUM TWO SNAGS PER ACRE 2. SKID TRAIL GRADES AND SPACING 3. CONSTRUCTED SKID TRAIL RECLAMATION 4. LONG DISTANCE GROUND-BASED SKIDDING OF 1,500-2,000 FEET REQUIRED 8. SLASHING OF LOGGING-DAMAGED TREES REQUIRED 9. PURCHASER SLASH PILING AND SCARIFICATION 10. OTHER MATERIAL 12. RESERVED SUBMERCHANTABLE TREE PROTECTION 		

HARVEST UNIT NUMBER(S)	ACRES	ESTIMATED VOLUME (Tons)
9-18	9	716
YARDING METHOD: Ground based equipment		
MARKING: Leave tree marked with a purple horizontal ring at dbh and a stump mark		
OPERATING PERIOD: Award of contract – March 15, 2017; June 16, 2017 – March 15, 2018; November 16, 2018 – March 15, 2019.		
SPECIAL OPERATING REQUIREMENTS: <ol style="list-style-type: none"> 1. RETAIN MINIMUM TWO SNAGS PER ACRE 8. SLASHING OF LOGGING-DAMAGED TREES REQUIRED 9. PURCHASER SLASH PILING AND SCARIFICATION 10. OTHER MATERIAL 12. RESERVED SUBMERCHANTABLE TREE PROTECTION 		

TIMBER SALE CONTRACT

HARVEST UNIT NUMBER(S)	ACRES	ESTIMATED VOLUME (Tons)
16-12	22	1,750
YARDING METHOD: Ground based equipment		
MARKING: Leave tree marked with a purple horizontal ring at dbh and a stump mark		
OPERATING PERIOD: Award of contract – March 15, 2017; June 16, 2017 – March 15, 2018; November 16, 2018 – March 15, 2019.		
SPECIAL OPERATING REQUIREMENTS: <ol style="list-style-type: none"> 1. RETAIN MINIMUM TWO SNAGS PER ACRE 2. SKID TRAIL GRADES AND SPACING 3. CONSTRUCTED SKID TRAIL RECLAMATION 5. EQUIPMENT RESTRICTION ZONE, STREAMSIDE MANAGEMENT ZONE 8. SLASHING OF LOGGING-DAMAGED TREES REQUIRED 9. PURCHASER SLASH PILING AND SCARIFICATION 10. OTHER MATERIAL 12. RESERVED SUBMERCHANTABLE TREE PROTECTION 		

HARVEST UNIT NUMBER(S)	ACRES	ESTIMATED VOLUME (Tons)
16-14	8	637
YARDING METHOD: Ground based equipment		
MARKING: Leave tree marked with a purple horizontal ring at dbh and a stump mark		
OPERATING PERIOD: Award of contract – March 15, 2017; June 16, 2017 – March 15, 2018; November 16, 2018 – March 15, 2019.		
SPECIAL OPERATING REQUIREMENTS: <ol style="list-style-type: none"> 1. RETAIN MINIMUM TWO SNAGS PER ACRE 5. EQUIPMENT RESTRICTION ZONE, STREAMSIDE MANAGEMENT ZONE 8. SLASHING OF LOGGING-DAMAGED TREES REQUIRED 9. PURCHASER SLASH PILING AND SCARIFICATION 10. OTHER MATERIAL 12. RESERVED SUBMERCHANTABLE TREE PROTECTION 		

TIMBER SALE CONTRACT

HARVEST UNIT NUMBER(S)	ACRES	ESTIMATED VOLUME (Tons)
16-17	52	4,137
YARDING METHOD: Ground based equipment		
MARKING: Leave tree marked with a purple horizontal ring at dbh and a stump mark		
OPERATING PERIOD: Award of contract – March 15, 2017; June 16, 2017 – March 15, 2018; November 16, 2018 – March 15, 2019.		
SPECIAL OPERATING REQUIREMENTS: <ol style="list-style-type: none"> 1. RETAIN MINIMUM TWO SNAGS PER ACRE 2. SKID TRAIL GRADES AND SPACING 3. CONSTRUCTED SKID TRAIL RECLAMATION 4. LONG DISTANCE GROUND-BASED SKIDDING OF 1,500-2,000 FEET REQUIRED 5. EQUIPMENT RESTRICTION ZONE, STREAMSIDE MANAGEMENT ZONE 8. SLASHING OF LOGGING-DAMAGED TREES REQUIRED 9. PURCHASER SLASH PILING AND SCARIFICATION 10. OTHER MATERIAL 12. RESERVED SUBMERCHANTABLE TREE PROTECTION 		

HARVEST UNIT NUMBER(S)	ACRES	ESTIMATED VOLUME (Tons)
16-21	34	2,705
YARDING METHOD: Ground based equipment		
MARKING: Leave tree marked with a purple horizontal ring at dbh and a stump mark		
OPERATING PERIOD: Award of contract – March 15, 2017; June 16, 2017 – March 15, 2018; November 16, 2018 – March 15, 2019.		
SPECIAL OPERATING REQUIREMENTS: <ol style="list-style-type: none"> 1. RETAIN MINIMUM TWO SNAGS PER ACRE 2. SKID TRAIL GRADES AND SPACING 3. CONSTRUCTED SKID TRAIL RECLAMATION 4. LONG DISTANCE GROUND-BASED SKIDDING OF 1,500-2,000 FEET REQUIRED 5. EQUIPMENT RESTRICTION ZONE, STREAMSIDE MANAGEMENT ZONE 8. SLASHING OF LOGGING-DAMAGED TREES REQUIRED 9. PURCHASER SLASH PILING AND SCARIFICATION 10. OTHER MATERIAL 12. RESERVED SUBMERCHANTABLE TREE PROTECTION 		

TIMBER SALE CONTRACT

HARVEST UNIT NUMBER(S)	ACRES	ESTIMATED VOLUME (Tons)
16-22A	17	1,353
YARDING METHOD: Ground based equipment		
MARKING: Leave tree marked with a purple horizontal ring at dbh and a stump mark		
OPERATING PERIOD: Award of contract – March 15, 2017; June 16, 2017 – March 15, 2018; November 16, 2018 – March 15, 2019.		
SPECIAL OPERATING REQUIREMENTS: <ol style="list-style-type: none"> 1. RETAIN MINIMUM TWO SNAGS PER ACRE 2. SKID TRAIL GRADES AND SPACING 3. CONSTRUCTED SKID TRAIL RECLAMATION 5. EQUIPMENT RESTRICTION ZONE, STREAMSIDE MANAGEMENT ZONE 7. HOT DECKING REQUIRED TO REDUCE LANDING SIZE AND KEEP ROADS OPEN 8. SLASHING OF LOGGING-DAMAGED TREES REQUIRED 9. PURCHASER SLASH PILING AND SCARIFICATION 10. OTHER MATERIAL 12. RESERVED SUBMERCHANTABLE TREE PROTECTION 		

HARVEST UNIT NUMBER(S)	ACRES	ESTIMATED VOLUME (Tons)
16-22B	5	398
YARDING METHOD: Ground based equipment		
MARKING: Leave tree marked with a purple horizontal ring at dbh and a stump mark		
OPERATING PERIOD: Award of contract – March 15, 2017; June 16, 2017 – March 15, 2018; November 16, 2018 – March 15, 2019.		
SPECIAL OPERATING REQUIREMENTS: <ol style="list-style-type: none"> 1. RETAIN MINIMUM TWO SNAGS PER ACRE 4. LONG DISTANCE GROUND-BASED SKIDDING OF 1,500-2,000 FEET REQUIRED 5. EQUIPMENT RESTRICTION ZONE, STREAMSIDE MANAGEMENT ZONE 8. SLASHING OF LOGGING-DAMAGED TREES REQUIRED 9. PURCHASER SLASH PILING AND SCARIFICATION 10. OTHER MATERIAL 11. PERMITTED CROSSING 12. RESERVED SUBMERCHANTABLE TREE PROTECTION 		

TIMBER SALE CONTRACT

HARVEST UNIT NUMBER(S)	ACRES	ESTIMATED VOLUME (Tons)
16-22C	3	238
YARDING METHOD: Ground based equipment		
MARKING: Leave tree marked with a purple horizontal ring at dbh and a stump mark		
OPERATING PERIOD: Award of contract – March 15, 2017; June 16, 2017 – March 15, 2018; November 16, 2018 – March 15, 2019.		
SPECIAL OPERATING REQUIREMENTS: <ol style="list-style-type: none"> 1. RETAIN MINIMUM TWO SNAGS PER ACRE 2. SKID TRAIL GRADES AND SPACING 3. CONSTRUCTED SKID TRAIL RECLAMATION 5. EQUIPMENT RESTRICTION ZONE, STREAMSIDE MANAGEMENT ZONE 8. SLASHING OF LOGGING-DAMAGED TREES REQUIRED 9. PURCHASER SLASH PILING AND SCARIFICATION 10. OTHER MATERIAL 12. RESERVED SUBMERCHANTABLE TREE PROTECTION 		

G. SPECIAL OPERATING REQUIREMENTS: The following requirements are to be performed by the Purchaser in specific sale units as shown in Section VII.F, UNIT DESIGNATIONS.

1. **RETAIN MINIMUM TWO SNAGS PER ACRE:** A minimum of two (2) snags per acre at least 21 inches DBH must be left where available. If no snags of that size are available leave the next largest size available to meet minimum of 2 snags per acre.
2. **SKID TRAIL GRADES AND SPACING:** Skid trails shall be spaced not less than 66 feet between trails except at common landings. On slopes greater than 45% where skidding is permitted, skid trails shall be placed on slope contours and approved prior to construction by the Forest Officer. The grade of skid trails shall not exceed 20%.
3. **CONSTRUCTED SKID TRAIL RECLAMATION:** All constructed skid trails will be reclaimed after use. This includes installing drainage features and reshaping to near natural contours. Use of an excavator is required.
4. **LONG DISTANCE GROUND-BASED SKIDDING OF 1,500-2,000 FEET REQUIRED:** Skidding distances of 1,500-2,000 feet are required in this unit. A combination of methods and equipment may be approved by the Forest Officer.
5. **EQUIPMENT RESTRICTION ZONE, STREAMSIDE MANAGEMENT ZONE:** Equipment is prohibited from operating in areas designated as equipment restriction or streamside management zones. All trees designated for harvest within such zones shall be winchline skidded to skid trails outside the zone. Designated crossings must be approved by the Forest Officer. Slash will not be piled in or pushed into the zone.
6. **ADDITIONAL TREES TO CUT OUTSIDE UNIT BOUNDARY:** Additional trees are available to cut adjacent to the unit boundaries in this unit (north boundary). Trees must be directionally felled towards the unit and skidded back into the unit.
7. **HOT DECKING REQUIRED TO REDUCE LANDING SIZE AND KEEP ROADS OPEN:** Due to limited landing size and landings on public roads, Purchaser may be required to keep hauling concurrent with skidding and decking. Purchaser is required to keep roads passable if practicable on evenings and weekends when no logging operations are active.

- 8. SLASHING OF LOGGING-DAMAGED TREES REQUIRED:** The Purchaser shall fell all sub-merchantable trees with logging-related root or stem damage, causing lean. The stem shall be completely severed from the stump below the lowest live limb. Maximum stump height shall be 12 inches on the uphill side.
- 9. PURCHASER SLASH PILING AND SCARIFICATION:** In areas where slash piling and scarification is designated by the Forest Officer, the following requirements and specifications apply and are further defined in Attachments F, G and H:
- a. Piling will be completed by an excavator, with 161 horsepower or smaller, equipped with bucket and thumb, clamshell, double rake head or other slash piling implement head approved by the Forest Officer.
 - b. Prior to operation, the Purchaser's Supervisor and Forest Officer will visit each harvest unit and agree on piling and scarification needs and acreage to be treated.
 - c. Operations will be conducted under dry or frozen soil conditions only. The Forest Officer may temporarily suspend operations under unfavorable operating conditions.
 - d. 10 - 15 tons/acre of woody debris 3 inches or larger in diameter will be left on site.
 - e. All piles will be clean, 6 feet or greater in height, and compacted with piling equipment to a sufficient degree to allow complete burning.
 - f. No piles will be constructed within 20 feet of residual trees, or underneath any portion of the crown of a residual tree. If spacing of residual trees makes this impractical, piles will be constructed in the largest openings available.
 - g. The operator will avoid damaging residual trees and will avoid displacement of soil during piling operations.
 - h. Scarification levels would consist of the exposure down to bare mineral soil on 30 to 35 percent of the area treated.
- 10. OTHER MATERIAL:** The Purchaser shall be required to cut and deck at landings non-sawlog trees that meet the minimum log size of trees designated for cutting in Table 2 of the timber sale contract. If hauled, this product shall be billed at the rate shown in Table 1 – Payment Rates.
- 11. PERMITTED CROSSING:** A crossing is permitted across a wetland area. Location of crossing shall be approved by the Forest Officer. Crossing shall only be utilized when conditions are dry, frozen, snow covered, or log corduroy is in place.
- 12. RESERVED SUBMERCHANTABLE TREE PROTECTION:** Care shall be exercised in felling and skidding operations to minimize damage to patches of sub-merchantable trees. Patches of advanced regeneration of shade tolerant trees (grand fir, subalpine fir, spruce) should be retained at a minimum of 10 percent of the stand.
- H. LOGGING OPERATIONS PLAN:** The Forest Officer shall approve a plan for felling, yarding, and landing logs (both Sawlogs and Other Material) in each harvest unit prior to the start of operations in that unit.
- I. NUTRIENT RECYCLING REQUIREMENT:** Purchaser is required to leave material in the unit for recycling of forest nutrients. At the same time, logging slash loading shall be kept to a minimum by skidding and piling some slash at the landings.

TIMBER SALE CONTRACT

- a. Purchaser is required to leave most logging slash *foliage* scattered on the forest floor. The Forest Officer may require lopping and scattering of limbs, severing tops before skidding, returning tops to the woods, or other methods to achieve this requirement.
- b. Purchaser is required to leave 10-15 tons of material 3 inches in diameter or larger to meet DOWN, WOODY MATERIAL requirements in paragraph IV.C-3. The Forest Officer may require the bucking of cull material in the woods, leaving dead, down sawlogs, or other methods.
- c. Purchaser is required to reduce slash loading above the amounts required to meet 3a and 3b above. The Forest Officer may require whole-tree skidding (top and limbs attached, bucking permitted) of some material to meet this requirement.
- d. The Forest Officer and Purchaser will agree to amounts of material and the bucking, lopping, and skidding methods to meet these requirements prior to felling and skidding in the unit.

J. SKID TRAIL LAYOUT AND YARDING PLAN: The Purchaser must follow these requirements along with those shown under VII.G. SPECIAL OPERATING REQUIREMENTS when developing a yarding plan for each unit. The Forest Officer may approve exceptions to these requirements in writing.

1. The Purchaser shall lay out skid trails and have locations approved by the Forest Officer prior to felling trees.
2. All skid trails will be located within the harvest unit boundaries.
3. Any constructed skid trails shall be completed and approved by the Forest Officer prior to felling timber.
4. Skid trails will not be located in draws, and may only cross draws at locations flagged and approved by the Forest Officer.

K. LANDINGS AND LOG DECKS:

1. The Purchaser shall construct landings at locations approved by the Forest Officer prior to felling timber.
2. Landings shall be kept to the minimum size necessary to allow the safe handling of logs. The Forest Officer must approve landing size.
3. All deck locations shall be approved by the Forest Officer prior to clearing or use. Decks shall be located so as to minimize the number of trees cut for construction of the deck area.

L. FELLING:

1. In each harvest unit, a felling pattern shall be used which conforms to the logging operations plan and causes the least damage to reserve trees and other resources.
2. Felling shall be systematic and continuous to avoid lost logs and minimize the number of skidding trips.
3. Trees shall be directionally felled away from features requiring protection within or adjacent to harvest units. Features requiring protection include streams, meadows, wet areas, and areas specified under Section VII.F. UNIT DESIGNATIONS. Wedges, jacks, winches, or other special equipment may be required to direct trees when felling. Trees falling into protection areas shall be winch-line skidded out of protected features. All necessary mitigation for damage caused by improper and/or non-approved felling into a protected zone is the responsibility of the Purchaser. The Forest Officer must approve all mitigation work.
4. Traffic Control Required For Felling along Roads: If felling operations occur along public roads, traffic guards with "STOP" signs shall be posted 500 feet in both directions from the units on open roads, providing a safety zone to warn oncoming traffic that logging operations are in progress. All traffic shall be stopped when tree felling is in progress. Traffic stops should not exceed 15

minutes at any one time. All saws will be shut off when traffic is moving through the safety zone. Wedges and/or jacks shall be used to ensure trees do not fall onto the roadway. In the event a tree falls across the roadway, all debris shall be removed immediately from the roadway and right-of-way. The Forest Officer must approve any extended road closures for logging operations.

M. YARDING AND MECHANICAL FELLING: The Purchaser must follow these requirements during logging operations, along with those shown under Section VII.G. SPECIAL OPERATING REQUIREMENTS. The Forest Officer will determine when restrictive conditions apply, and may approve exceptions to these requirements in writing.

1. Soil Compaction Restrictions: In order to prevent soil resource impacts, ground-based mechanical felling and yarding are restricted to periods when one or more of the following conditions occur:
 - a. Soil moisture content at 4-inch depth less than 20% oven-dry weight.
 - b. Minimum frost depth of 4 inches.
 - c. Minimum snow depth of 18 inches, loose, or 12 inches, packed.
2. Suspended Operations for Soil Compaction and Displacement: The Purchaser will be required to restrict or suspend logging operations when soils are subject to compaction or displacement by heavy equipment.
3. Equipment Restrictions:
 - a. Equipment shall not be operated in areas designated as EQUIPMENT RESTRICTION ZONES, WETLAND MANAGEMENT ZONES or STREAMSIDE MANAGEMENT ZONES as shown in Section VII.D.6 and 7, unless authorized by this Contract or the Forest Officer.
 - b. Equipment shall not be operated in soft soils, boggy areas or areas where skidding would cause excessive compaction and displacement.
 - c. Any trees designated for harvest within such zones shall be winchline skidded to skid trails outside the zone.
 - d. Slash will not be piled in or pushed into these zones.
 - e. The Forest Officer must approve any designated crossings of restricted areas.
4. Protection of Reserved Trees: The Purchaser shall exercise reasonable care to prevent damage to trees reserved from cutting during logging operations.

N. CLEAN-UP AND COMPLETION: The Purchaser must follow these requirements and those shown under Section VII.G. SPECIAL OPERATING REQUIREMENTS during logging operations. The Forest Officer will determine when restrictive conditions apply, specifications and dates to meet these requirements and may approve exceptions in writing. The Forest Officer must approve all designated work prior to the removal of Purchaser's equipment.


1. Logging Debris Confined To Units: All debris from logging shall be confined within the harvest unit boundaries. Any logging debris outside a harvest unit must be returned to within the unit boundary.
2. Skidding Debris on Roads: The Purchaser shall remove logging slash remaining on any portion of a road cutbank or traveled way. Cut and fill slopes, ditches, or road surfaces damaged by skidding operations shall be restored to original conditions. Reseeding is required if vegetation is damaged by skidding.

TIMBER SALE CONTRACT

3. Repair of Improvements: Damage caused by the Purchaser's operations to culverts, waterlines, fences, roads, bridges, gates, cattleguards, signs, and all other improvements must be adequately repaired or replaced.
 4. Erosion Control:
 - a. The Purchaser shall construct slash and debris erosion barriers, dips, water bars or ditches in skid trails and landings as directed by the Forest Officer.
 - b. The kinds and frequency of erosion control structures shall be adjusted to soil types, topography and climatic conditions as directed by the Forest Officer.
 - c. The Purchaser is required to recontour any excavated skid trails, and provide for effective erosion control in the trail location as directed by the Forest Officer.
 - d. Erosion control work shall commence as soon as skidding is completed on each skid trail or landing, and must be kept current with unit operations.
 - e. Erosion control work shall be completed and approved by the Forest Officer in unfinished units before operations cease for inactive periods including heavy winter snowfall, spring breakup and restricted dates.
 - f. All erosion control work in each unit shall be completed prior to notification pursuant to Section VII.M.7. Acceptance of Completed Harvest Units.
 - g. The Purchaser shall maintain erosion control structures in active sale areas throughout the contract period or extensions thereof.
 5. Landing and Decking Area Cleanup: The Purchaser is required to pile logging residues on landings and log-decking areas. Proper equipment (e.g. brush blade, log loader) shall be used to ensure that no dirt is incorporated into the piles. Mechanical scarification of landing and decking areas may be required. Where logs have been decked on the downhill or fill side of a road, the Purchaser may be required to pile residue with a log loader or by hand. Residue piles shall be a minimum of 15 feet away from any live trees. Piles shall be located and constructed as directed by the Forest Officer.
 6. Systematic Harvest Unit Operations: When harvest operations are begun on a designated harvest unit, the harvest operations on that unit shall be fully completed before cutting may begin on other harvest units.
 7. Acceptance of Completed Harvest Units: The Forest Officer shall notify the Purchaser in writing when all contract requirements for each specified harvest unit or area have been met. After notice has been received, the Purchaser is not required to do additional work on the specified area except as provided in Section VII.A.4. FIRE KILL, INSECT INFESTATION, AND WIND THROWN.
- O. HAULING RESTRICTIONS:** The Purchaser will be required to restrict or suspend hauling during periods when the compacted road surface would be damaged, as directed by the Forest Officer. Restrictions are required when hauling would cause rutting into the subgrade, or surfacing materials would be displaced, such as during heavy rainfall or spring breakup freezing and thawing cycles
- P. LOGGING OPERATIONS SAFETY SIGNS:** Road signs warning of logging and road construction operations shall be posted 500 feet from the operations. When log hauling is in progress, warning signs shall be posted at major road junctions as directed by the Forest Officer. Warning signs must comply with specifications in the Manual on Uniform Traffic Control Devices.
- Q. UNRETURNED GATE KEYS:** The Purchaser may be charged \$25.00 for each gate key that is not returned to the State at the conclusion of this contract. A gate key is defined as a uniquely numbered key issued to a Purchaser for the purpose of entering a sale area on roads restricted to motorized use by a gated closure.

CILLY GRAVES VICINITY MAP – Attachment A-1

SWAN UNIT

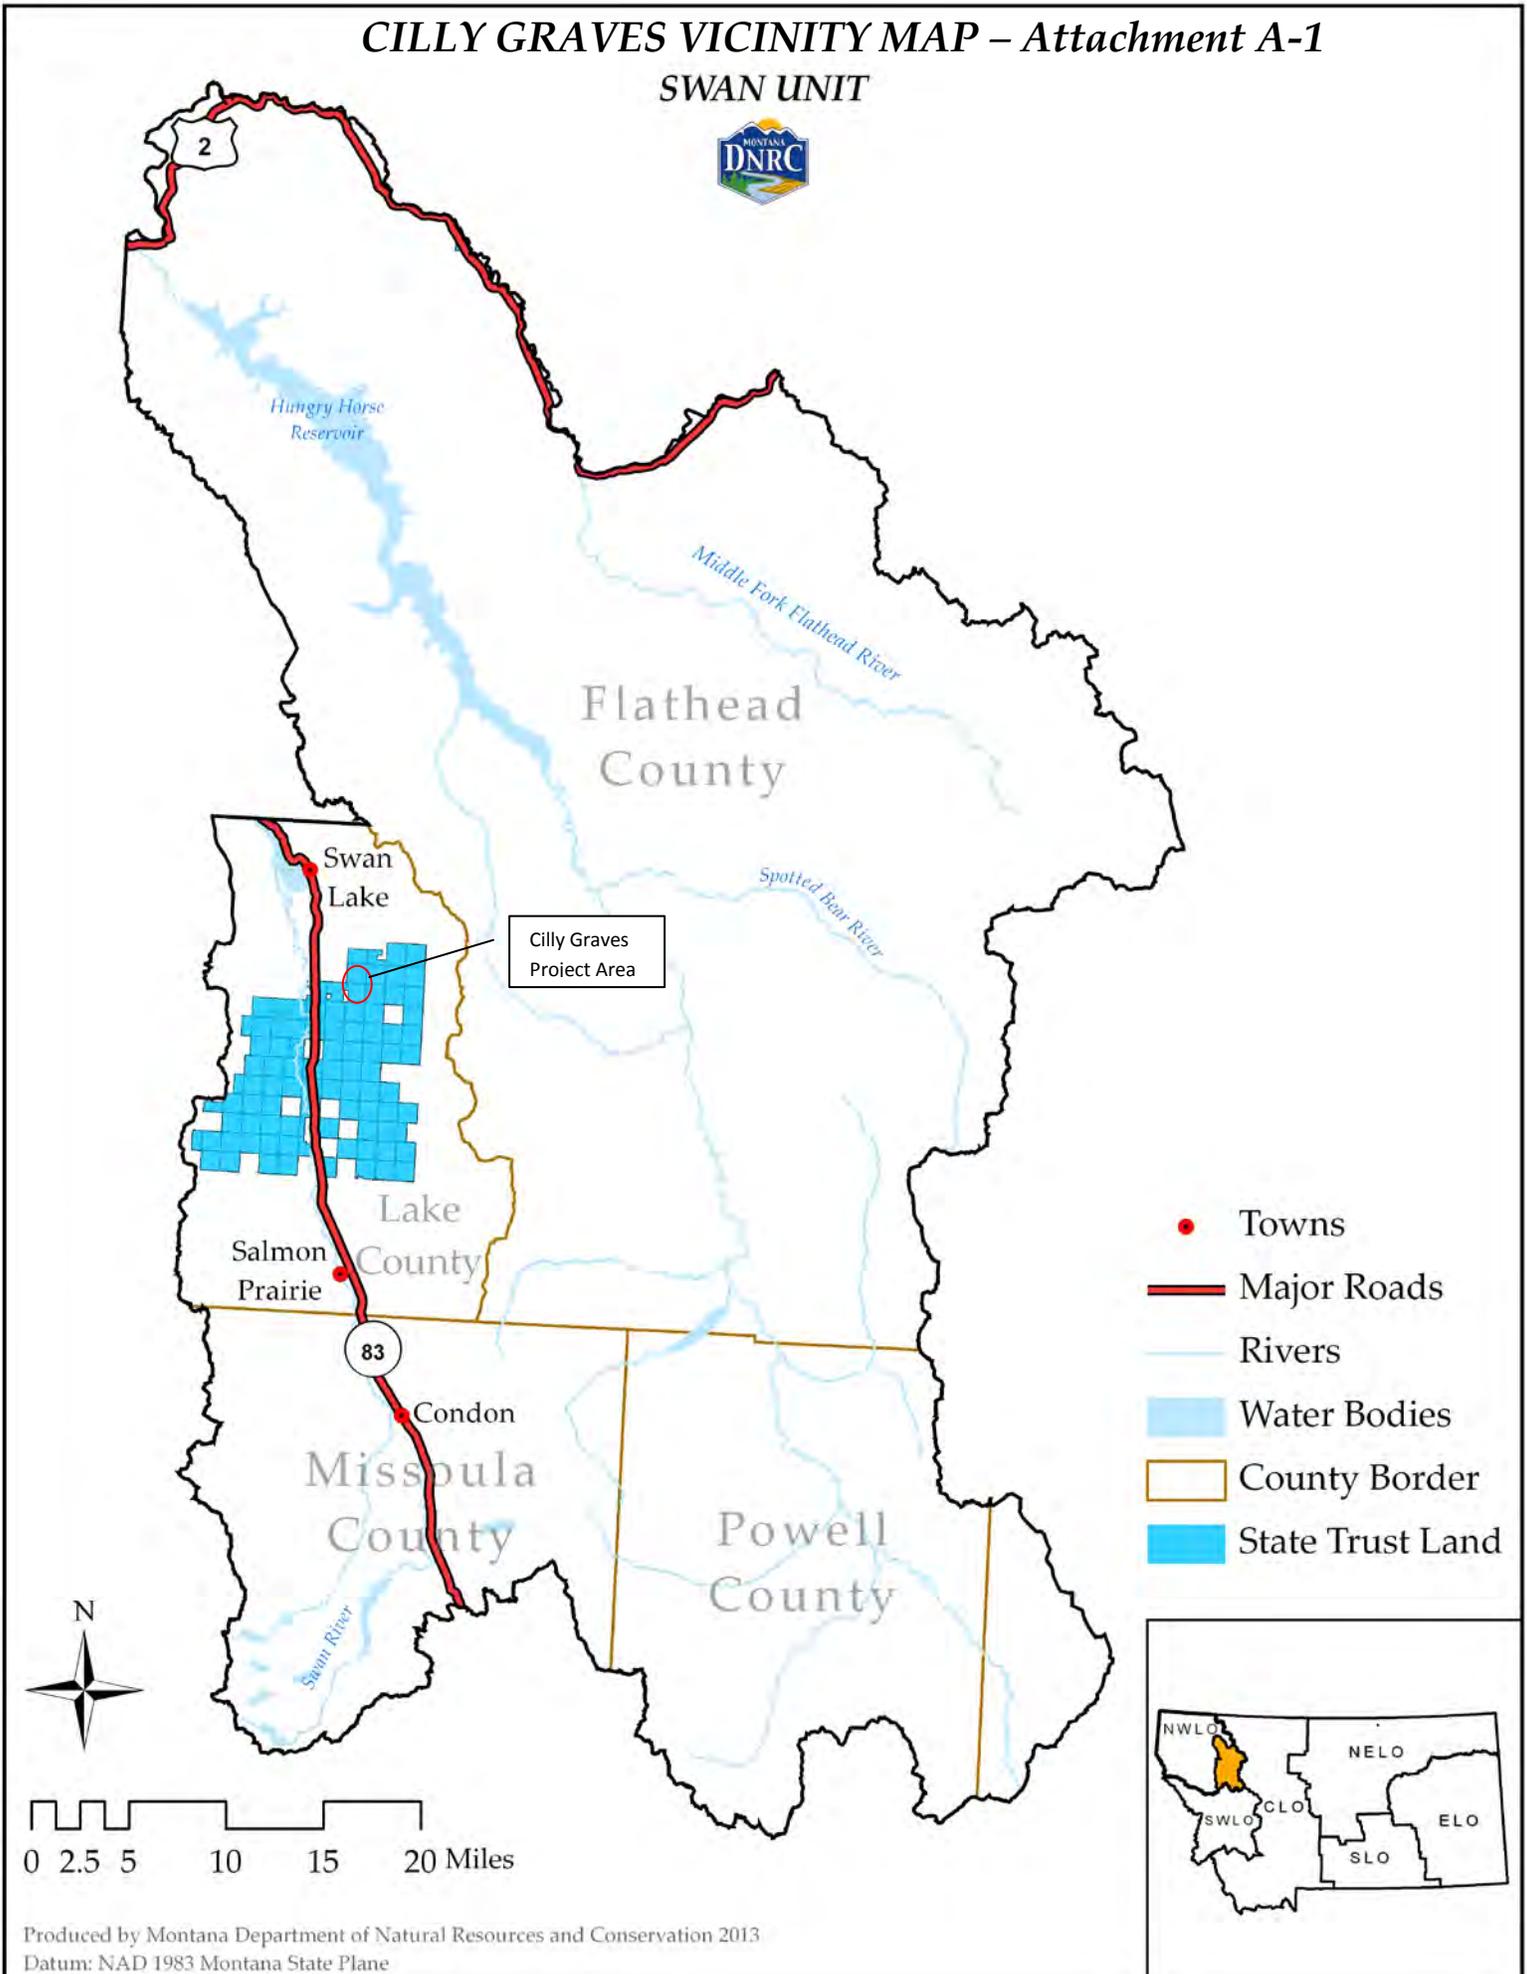


- Towns
- Major Roads
- Rivers
- Water Bodies
- County Border
- State Trust Land



0 2.5 5 10 15 20 Miles

Cilly Graves Timber Sale
 Project Area Map - Attachment A-2
 Sections 9 and 16 T24N R17W

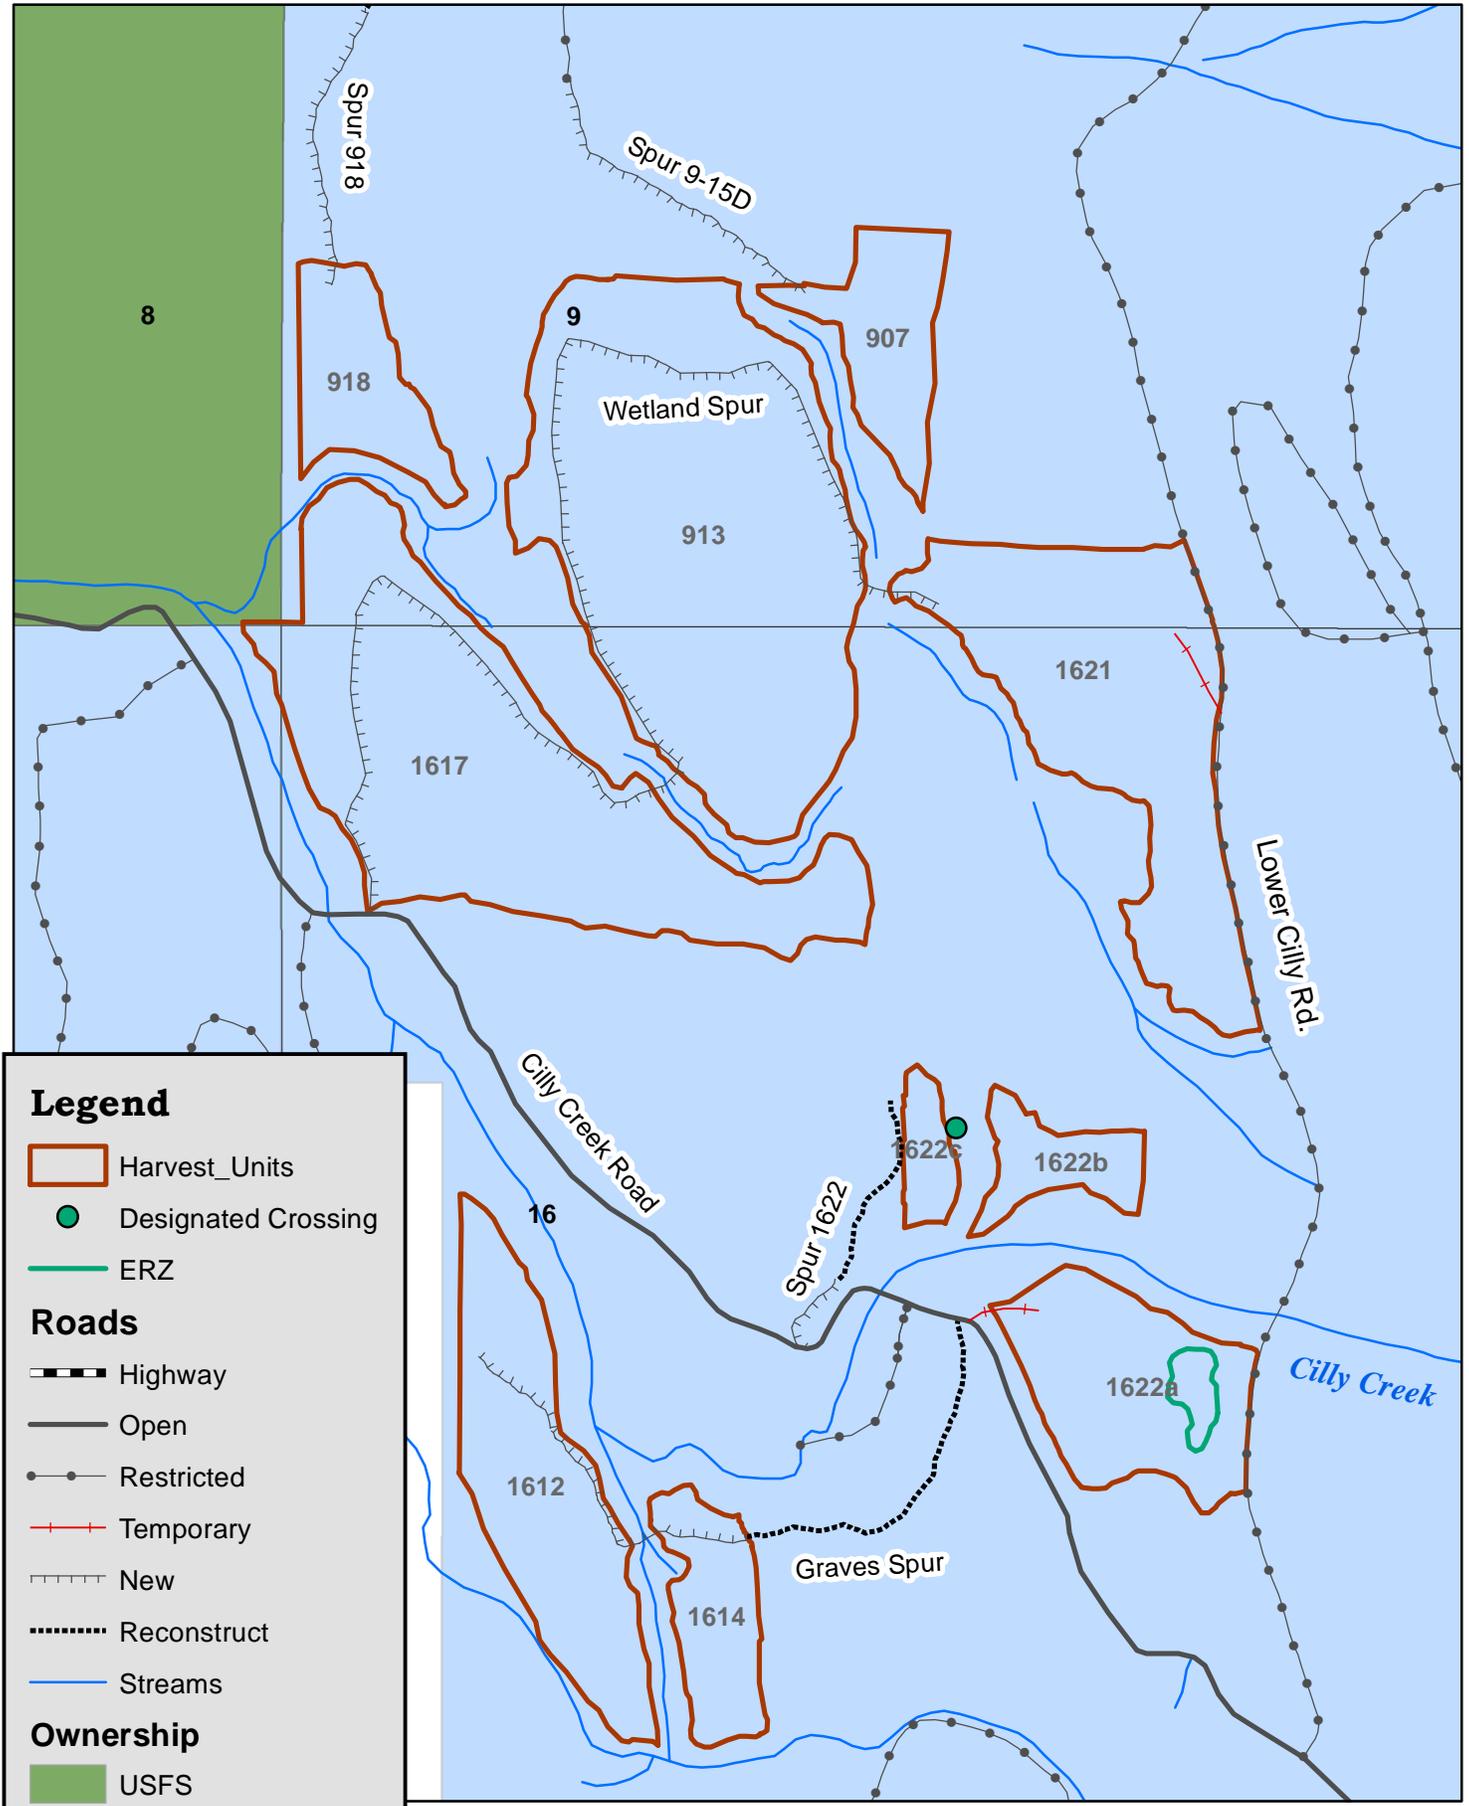

Legend


- Harvest_Units
- Designated Crossing
- ERZ

Roads

- Highway
- Open
- Restricted
- Temporary
- New
- Reconstruct
- Streams

Ownership


- USFS
- MT DNRC



Cilly Graves Timber Sale

Haul Route Map - Attachment A-3

Sections 9 and 16 T24N R17W

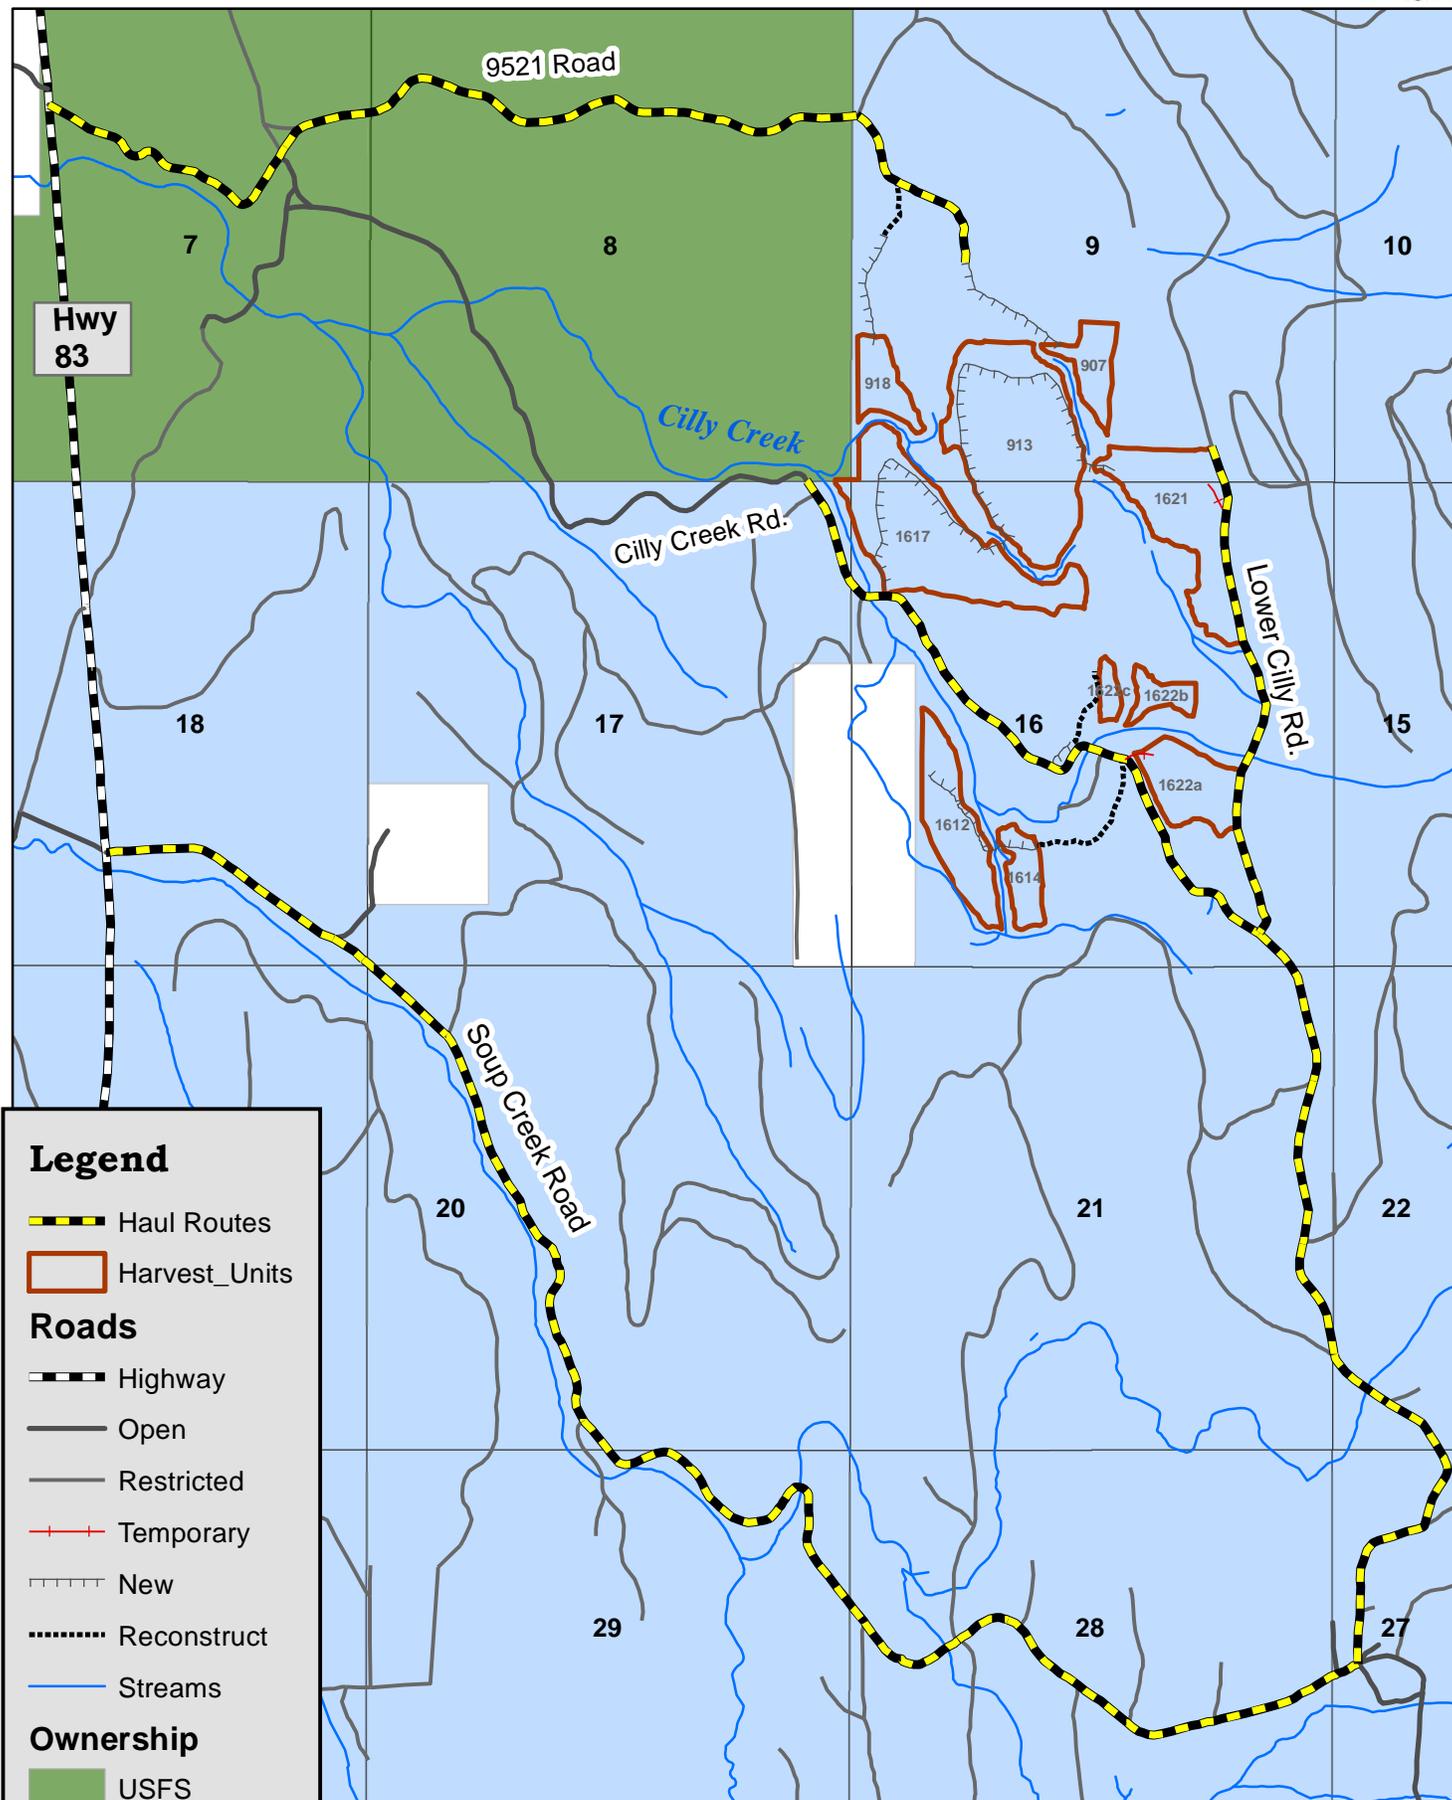

Legend

- Haul Routes
- Harvest_Units

Roads

- Highway
- Open
- Restricted
- Temporary
- New
- Reconstruct
- Streams

Ownership

- USFS
- MT DNRC



**STATE OF MONTANA
TIMBER SALE CONTRACT
ATTACHMENT B**

ROAD CONSTRUCTION, IMPROVEMENT AND MAINTENANCE SPECIFICATIONS	
SALE NAME	SALE NUMBER
Cilly Graves	

I. CONSTRUCTION REQUIREMENTS

A. ROADS: The Purchaser is required to construct the roads shown in Table B-1 according to the schedules stated, as shown on the Sale Map, Attachment A, and to the specifications and drawings in Attachment B and other applicable attachments.

TABLE B-1. ROAD CONSTRUCTION REQUIREMENTS				
Road Name or Number	Approximate Length (miles)	Type of Construction	Operation Period	Completion Date or Requirement
Soup Creek Road	3.8	Maintenance	<u>Renovation and Initial Maintenance:</u> Award of contract to November 30, 2016; June 1, 2017 to October 31, 2017	<u>Renovation and Initial Maintenance:</u> October 31, 2017
Cilly Creek Road	3.2	Maintenance		
Lower Cilly Road	1	Maintenance		
9521 Road	1.9	Maintenance	<u>New Road Construction:</u> Award of contract to November 30, 2016; June 1, 2017 to September 30, 2017	<u>New Road Construction:</u> September 30, 2017
Graves Spur	0.62	Renovation New Construction		
Spur 1622	0.23	Renovation New Construction	<u>Final Maintenance and Blading:</u> June 1, 2017 to November 15, 2017; June 16, 2018 to November 15, 2018; June 16, 2019 to August 15, 2019	August 15, 2019
Wetland Spur	1.48	New Construction		
Spur 918	0.36	Renovation New Construction		
Spur 9-15D	0.69	Renovation New Construction		

B. ROAD CONSTRUCTION MATERIALS ESTIMATE:

TABLE B-2: MATERIALS FURNISHED AND INSTALLED BY THE PURCHASER:					
The Purchaser is required to furnish the described material and install as required in Attachment B. Quantities are estimated, and the Attachment B requirements and specifications must be met regardless of the estimated amounts. All materials furnished by the Purchaser become the property of the State when installed. If, due to a minor design change, material is not installed, the material will be delivered to the nearest DNRC Unit Office and become property of the State upon delivery.					
Corrugated Metal Pipe				Other Materials	
No.	Diameter	Length	Gauge	Amount	Description
1	18"	26'	16	80 feet	Filter Fabric
1	18"	32'	16		
1	24"	40'	16		
1	30"	34'	16		
1	30"	40'	16		
Fill Material					
Yards	Type			Delivery Location	

TABLE B-2 (CONTINUED): SEED AND FERTILIZER REQUIREMENTS			
The Purchaser is required to furnish and apply certified noxious weed-free, pure live seed mixture(s) and fertilizer in the amounts shown. Total pounds mixed seed are pure live seed, corrected for germination and purity. Germination and purity tests must have been conducted within the last 12 months prior to delivery. Purchaser shall furnish documentation of germination and purity tests to the Forest Officer prior to application.			
Certified Noxious Weed-Free Seed		Fertilizer	
Pounds	Description	Pounds	Analysis (N-P-K)
69	Tall Fescue	2,150	16-16-16
34.5	"Durar" Hard Fescue		
69	Slender Wheatgrass		
34.5	Red Top		
34.5	Annual Rye		
241.50			

TABLE B-2 (Continued): MATERIALS FURNISHED BY THE STATE:			
The Purchaser is required to load and haul the described materials from the State source and install them as required in Attachment B.			
Amount	Description		
1	Gate (located at the Swan River State Forest headquarters)		
Fill Material			
Yards	Type	Source Location	Delivery Location
80	1 ½"-minus gravel	Goat Creek Pit	Cilly Creek Rd.: MM1.43; Graves Spur: 7+25, 21+33, Wetland Spur: 6+79, 33+79

10	Rock Armor	Goat Creek Pit	Wetland Spur: 34+15
650	Pit Run gravel	Goat Creek Pit	Graves Spur: 5+09, 20+81; Wetland Spur: 6+79, 33+97, 76+07 Spur 9-15D: 11+51, 13+86
20	Drain Rock	Woodward Pit	Wetland Spur: 76+07

C. MINOR CHANGES: The Forest Officer may require minor changes in location, design or specifications of road construction, improvement or maintenance requirements. Such changes must be within the scope of Attachment B requirements, and must not result in a significant (one thousand dollars [\$1,000.00] or greater) increase or decrease in cost as agreed to by the Forest Officer and the Purchaser.

D. ADJUSTMENT FOR CHANGE IN REQUIREMENTS: If the State requests a change in road construction, improvement or maintenance specifications and the State in its discretion determines that the change would significantly increase the cost to the Purchaser, then the State must compensate the Purchaser. If the Purchaser requests a change in road construction, improvement or maintenance specifications and the State in its discretion determines that the change is acceptable and would significantly reduce the cost to the Purchaser, then the Purchaser must compensate the State. Compensation to the Purchaser will be in the form of stumpage credit. Compensation to the State will be in cash and will be billed as a supplement to the stumpage bill. All significant changes and compensation will be described in a contract modification.

II. RIGHT-OF-WAY CLEARING

A. CLEAR LIMIT DEFINITIONS are shown in Section IX. SPECIFICATIONS AND DRAWINGS.

B. CLEAR LIMIT MARKING:

1. Clear limits for existing roads are **NOT** marked.
2. Clear limits for portions of new construction are marked with yellow paint dots facing into the road right-of-way.

C. CLEARING REQUIREMENTS:

1. Brush or trees on existing roads may be removed by sawing individual stems, cutting with a rotary brush cutter, uprooting with an excavator or other methods approved by the Forest Officer.
2. Inside the clear limits, but outside the road prism, trees and brush less than 20 feet tall and less than 3 inches in diameter that do not interfere with visibility or slope stability may be left as directed by the Forest Officer.
3. All merchantable timber within the clear limits on all roads to be constructed under the terms of this Contract shall be cut to the specifications in the timber sale contract and skidded to decks, or decked with an excavator, prior to earth moving.
4. Clearing procedures shall protect residual stands, prevent incorporation of construction slash into the road prism, and protect roadside appearance outside clear limits.
5. Grubbing will be limited to only those stumps and large roots within the road prism.

III. TREATMENT OF RIGHT-OF-WAY CLEARING MATERIALS

A. GENERAL TREATMENT REQUIREMENTS:

1. Road construction slash more than 3 inches in diameter and 6 feet long and all concentrations of slash which would adversely affect the stability of the road shall be disposed of by the methods described in this section.

2. Slash and debris shall not be placed in drainages, roadside ditches or heads of culverts where the flow of water may be obstructed and shall be removed if placed therein.
3. Lopping and scattering is defined as delimiting and sawing slash materials into lengths which will easily scatter to a maximum depth of 18 inches. Materials shall be scattered outside the road prism.
4. All slash to be disposed of by piling and burning shall be piled in burn bays and burned by the State at locations approved by the Forest Officer. Construction of piles will be of such size and at a sufficient distance from trees so that burning does not result in unnecessary damage to remaining trees. The Purchaser may be required to remove any trees damaged by burning operations at current contract rates. If burning is incomplete the residue must be disposed of as directed by the Forest Officer.

B. SIDESLOPES OF 35% OR LESS AND EXISTING ROADS:

1. Disposal will be by hand or machine piling for burning as directed by the Forest Officer.
2. Minor concentrations of slash or individual trees may be disposed of outside of the road prism by lopping and scattering as directed by the Forest Officer.
3. Tree stumps, large boulders and cull logs may be scattered outside the road right-of-way clear limits if approved in writing by the Forest Officer. Scattered stumps and boulders shall be placed away from trees and positioned so they will not roll.

C. SIDESLOPES OF 35% AND GREATER:

1. Treatment will be by excavator only, or by whole tree skidding to a decking area.
2. Where topography and timber types permit, piling for burning will be required as directed by the Forest Officer.
3. Where piling is not practical, treatment will be by windrowing at the toe of the fill. Slash will be windrowed on a trail constructed at the bottom of the right-of-way. Slash will be trampled and covered with organic surface material taken from the road prism as directed by the Forest Officer. Fill material may butt up against but not cover or bury the windrow.
4. Minor concentrations of slash or individual trees may be disposed of by lopping and scattering as directed by the Forest Officer.
5. Tree stumps, large boulders and cull logs may be scattered outside the road right-of-way clear limits if approved in writing by the Forest Officer. Scattered stumps and boulders shall be placed away from trees and positioned so they will not roll.

IV. EXCAVATION AND EMBANKMENT OF FILL MATERIALS

A. EXCAVATION OF ROAD CROSS SECTION:

1. All grubbing and clearing shall be completed prior to the beginning of any excavation.
2. Surface organic layer and ash cap (surface reddish-brown soils with low gravel content) will be bladed to the side of the road and not incorporated into fills.
3. Wasted soils and organic layer will be shaped and spread to natural contours at locations approved by the Forest Officer.
4. When excavating on tangents and when balanced section construction is indicated, the following

table will be used as a guideline to determine if sufficient excavation of road solid has occurred. Tolerances for road solid will be +1.0 feet and -0.5 feet.

TABLE B-3: EXCAVATION OF ROAD SOLID			
SIDESLOPE PERCENT	ROAD WIDTH		
	12 FT.	14 FT.	16 FT.
	FEET OF ROAD SOLID		
5	8.7	10.1	11.4
10	8.8	10.2	11.5
15	8.9	10.2	11.6
20	8.3	9.5	10.8
25	7.8	8.9	10.1
30	7.6	8.9	10.1
35	7.8	9.0	10.2
40	8.1	9.2	10.6
45	8.5	9.4	11.0
50	8.8	9.8	11.6
55	9.4	10.2	12.2
60	10.1	11.7	13.3
65 & over	12.0	14.0	16.0

B. EMBANKMENT OF FILL MATERIALS:

1. Fill materials shall be unfrozen and free of snow and ice.
2. Fill materials shall be sorted to remove large rocks over 6 inches in diameter near the surface, which may interfere with surface blading.
3. Where possible all fill materials shall be applied in layers not to exceed 18 inches and each layer compacted with heavy equipment prior to application of the next layer.
4. If fill materials are too dry to allow compaction, the Forest Officer may require watering of layers followed by heavy equipment compaction.
5. Gravel used for surfacing shall be compacted into place using loaded dump trucks or a vibratory drum roller if specified in the Road Log.

C. PIT DEVELOPMENT AND RECLAMATION:

1. During the period the gravel pit or borrow area is open the surface of the pit shall be kept clean of noxious weeds. The Purchaser shall remove any weeds found growing at the pit by pulling, cultivating, covering with plastic, spraying, or as directed by the Forest Officer.
2. At completion of use, the pit area will be reshaped to as near natural contours as possible. Back-slope ratios shall not exceed 3:1. Purchaser may be required to save topsoil, recontour the pit wall, and reclaim the disturbed portion of pit. All disturbed portions of the pit shall be grass seeded and fertilized.
3. At completion of use, talus slopes shall be back-sloped and reshaped as directed by the Forest Officer. Grass seeding and fertilizing are required on any disturbed areas with exposed soil.

V. DRAINAGE STRUCTURES

- A. CORRUGATED METAL PIPE:** The corrugated metal pipe required in Table B-2 will be installed as follows:

1. All pipes shall be installed with a backhoe or excavator. The exact locations shall be determined and approved by the Forest Officer after the right-of-way is brushed and cleared.
2. The excavation trench for culvert installation shall not be wider than necessary to permit satisfactory jointing and thorough tamping of the bedding material under and around the pipe.
3. The bedding surface shall be constructed to provide a firm foundation of uniform density through the entire length of the culvert and shall be slightly cambered along the centerline to correct for expected settlement.
4. Where the bedding surface is not firm at the grade established, all unstable soil under the pipe and for a width of at least one diameter on each side of the pipe shall be removed and replaced with suitable selected material. Rock encountered in the bedding foundation will be removed to at least 12 inches below the bottom of the pipe and one diameter on each side. The final bedding area shall consist of fine, compacted granular material.
5. Selected material shall be placed alongside the pipe for backfill in alternating layers not exceeding six inches in depth and thoroughly compacted by a hand held mechanical tamper (Wacker packer). Special care must be taken to compact the fill thoroughly under the haunches of the pipe. Wacker packer compaction of backfill must be done for a horizontal distance on each side of the pipe equal to either one pipe diameter or to the outside limits of the trench, whichever is less. The depth of Wacker packer compaction must extend at least to the top of the pipe.
6. Selected native fill material will be free from rocks and hard earth clods larger than 3 inches in size. Frozen material, sod or a high percentage of organic matter is not permitted.
7. The remainder of the fill above the top of the pipe may be compacted by tractor or rubber-tired roller. Fill is to extend above each pipe at least one-half the pipe diameter or a minimum of 12 inches, whichever is greater.
8. The pipe shall be protected by adequate fill cover before heavy equipment is permitted to cross during roadway construction.
9. Pipe that is damaged or improperly installed shall be repaired or replaced at Purchaser expense as directed by the Forest Officer.
10. The Forest Officer must be contacted two days before any culvert installation and must be present at any wet site culvert installation.
11. Riprap consisting of angular native rock of graded sizes 6 to 12 inches in diameter shall be installed to armor cuts and fills at both ends of all culverts installed in streams.
12. Energy dissipaters consisting of native rock at least 24 inches in diameter with flat cross section shall be installed below culvert outlets in all perennial streams.

B. WET SITE CULVERT INSTALLATION REQUIREMENTS:

1. The Forest Officer and the Purchaser shall agree upon a site specific sediment and erosion control plan that meets the requirements of all attachments and permits for each wet installation prior to any construction. Sediment and erosion control features may include any or all of the following at each site:
 - a. Filter Fabric Sediment Traps.
 - b. Sediment Control Fence.
 - c. Slash Filter Windrows.

- d. Other measures as directed by Forest Officer.
2. The Forest Officer and the Purchaser shall agree upon a site specific water diversion plan for each wet installation. Diversions may include: by-pass ditches, plastic lined by-pass ditches, plastic or metal pipe by-passes or other methods as directed by the Forest Officer. Pumping with discharge back into the channel is not permitted.
3. All wet site culvert installations require seeding of all disturbed areas with Quick Cover Mix the same day as installation is completed.
4. Any equipment operated within the high-water level of any stream or river channel shall be free of oil and fluid leaks and shall be clean of mud. Said equipment must be inspected by the Forest Officer and approved prior to any use.
5. Filter fabric sediment traps shall be installed prior to any construction activities on all wet culvert installations.

VI. ROAD MAINTENANCE

A. ROAD MAINTENANCE SCHEDULE AND REQUIREMENTS:

1. Road maintenance may be required on all native material or gravel roads designated for hauling purposes.
2. Road maintenance is defined to include all operations listed under Section VI. of Attachment B.
3. Initial maintenance of the roads shall be completed prior to use for logging and hauling.
4. The Forest Officer will determine the number, type, extent and frequency of intermediate maintenance operations. Road maintenance shall be repeated as needed to facilitate traffic and proper road drainage. The Purchaser will be advised of the time limitations to complete each maintenance project.
5. Final maintenance of the road system is required after all logging and hauling and prior to termination of the Timber Sale Contract.

B. SURFACE BLADING:

1. Description: Surface blading is keeping a native or aggregate roadbed in a condition to facilitate traffic and provide proper drainage. It includes maintaining the crown or slope, shoulder, drainage dips, leadoff ditches, berms and turnouts, and provides a level of smoothness appropriate for the amount and kind of traffic served and consistent with existing surfacing.
2. Specifications:
 - a. The existing roadbeds, including turnouts, shall be bladed and shaped to reasonably conform to the designed cross section, and to eliminate ruts. Existing aggregate surfacing shall be bladed to conserve material and to prevent segregation of particle sizes. Rocks or other material remaining on the traveled way surface after final blading which are 4 inches or larger in size shall be removed from the road surface.
 - b. Roadside cut-slopes should not be undercut when cleaning ditches or removing road sloughs. Berms shall be removed from road shoulders when blading, except where berms are located as part of road design.
 - c. Cut-slopes that have been undercut may require back-sloping, seeding and fertilizing.

- d. At intersections, the roadbeds at side roads shall be graded for a reasonable distance to assure proper blending of the two riding surfaces.
- e. Drainage dips and leadoff ditches shall be cleaned and graded to form their previous line and grade.
- f. Crowned roads should slope towards shoulders at least 2-5% (1/4-1/2 inch per foot road width) on native and gravel roads.
- g. At intersections where side roads enter the main road and the entering side road exceeds +3%, shallow ditching across the side road may be required to divert surface runoff and protect the main road's stability.
- h. The side-casting of road material into a stream, lake, wetland, or other body of water during road maintenance operations is prohibited in the SMZ.

C. DITCH CLEANING:

- 1. Description: Ditch cleaning is removing and disposing of all foreign and slough material from roadside ditches to provide an unobstructed waterway conforming reasonably to previous line, grade and cross section.
- 2. Specifications:
 - a. Slough material removed from the ditch may be blended into existing native road surface or shoulder only if it is the same material as the road surface. Slough material that is not suitable for blending should be disposed of as directed by the Forest Officer.
 - b. Live vegetation and other organic material shall be removed and disposed of as directed by the Forest Officer.
 - c. Unstable stumps, rocks, leaning trees or other debris shall be removed from the cutslope as directed by the Forest Officer.

D. CULVERT MAINTENANCE:

- 1. Description: Maintenance is work performed on inlets, outlets, catch basins, related channels, existing riprap, trash racks and any other facilities related to the drainage structure.
- 2. Specifications: Catch basins, outlets and energy dissipaters shall be kept functioning and cleaned of debris. Ends of culverts shall be kept straight and undamaged. Any washing alongside or underneath the culvert shall be repaired.

E. ROADSIDE VEGETATION MAINTENANCE:

- 1. Description: Maintenance of roadside vegetation includes removal of brush, tree growth, deadfall or other obstructions to passage, safety or visibility, as such obstructions are present or develop during the contract period.
- 2. Specifications:
 - a. All trees that have fallen across the road shall be removed from the road prism unless otherwise agreed upon. Merchantable timber, if any, shall be cut in appropriate lengths and decked along the roadside in locations where traveled way width or sight distances will not be impaired.
 - b. Brush and seedling trees that encroach upon the original road clear limits shall be removed when they reduce safe sight distances. Low shrubs and brush that do not restrict sight

distance but provide cover and reduce erosion shall not be removed. Brush and seedling trees removed shall be disposed of as directed by the Forest Officer.

F. SNOWPLOWING: If hauling occurs during the winter months, the Purchaser will be required to plow snow to the following guidelines on all State and private roads.

1. Snow should be windrowed beyond the fill shoulder line.
2. To protect the road surface, a 1 to 4-inch cushion of snow may be left on the road.
3. At termination of use, the road will be prepared for spring runoff by opening drainage outlets through the plowed berms and by installing a snow-berm road closure.
4. Tracked equipment will not be used to plow snow without prior written approval from the Forest Officer.
5. The side-casting of road material into a stream, lake, wetland, or other body of water during snow plowing operations is prohibited in the SMZ.

G. DUST ABATEMENT: The Purchaser may be required to perform dust abatement on any of the roads designated as part of the haul route. Any dust abatement must conform to current standards of the owner of the road.

1. If the Purchaser applies Magnesium Chloride or Calcium Chloride for dust abatement, the following specifications will be followed:
 - a. Dust abatement will be applied prior to summer hauling of logs.
 - b. Scarify road surface and grade to final grading specifications. A minimum of two inches of loose material is required on the road surface prior to applying the abatement.
 - c. The road surface will be moist to a minimum of depth of two inches or watered uniformly to moisten the road. If the road is watered, it will be done twelve to twenty-four hours prior to application of the abatement.
 - d. The abatement will be applied at the rate of 0.25 gallons Magnesium Chloride per square yard or 0.20 gallons Calcium Chloride per square yard, followed immediately by another application at the same rate, for a total of 0.5 gallons Magnesium Chloride per square yard or 0.4 gallons Calcium Chloride per square yard.
 - e. Chemical abatement will not be applied for 50 feet on either side of any stream crossing.
 - f. Additional treatments using water may be required if deemed necessary by the Forest Officer.
2. The Purchaser is required to apply dust abatement on Soup Creek Road, 3.8 miles; Cilly Creek Road, 3.2 miles. Dust abatement shall be applied as directed by the Forest Officer. Water may be used for dust abatement.

H. NOXIOUS WEED MANAGEMENT: The Purchaser may be required to perform noxious weed management on any of the roads designated as part of the haul route and on landings. Noxious weed management may include grass seeding, equipment washing and herbicide spraying.

1. Grass seeding, if required, is shown in Section IX, GRASS SEEDING SPECIFICATIONS.
2. All road construction equipment and equipment used in off-road logging activity must be pressure-washed by the Purchaser and inspected by the Forest Officer prior to entering the sale area. This cleaning will remove all dirt, plant parts, and material that may carry noxious weed

seeds into the sale area. Other equipment and vehicles entering and leaving the sale area shall be cleaned prior to start up and kept reasonably clean during the course of operations. All subsequent move-ins of logging and construction equipment shall be treated the same as the initial move-in.

3. If spraying is required in Attachment B, it shall be done by a commercial applicator licensed by the State of Montana or by personnel under the direct supervision of the licensed applicator. All herbicide applications shall follow EPA label requirements. Any weed control must comply with the current standards of the County Weed Board and as directed by the Forest Officer.
4. Weed sprayings are required on all designated haul routes behind road closures at least 20 days prior to any activity and the spring following completion of all commercial activities. Both weed spraying applications must be completed by July 1st.
5. 95% of treatments will be accomplished with **Milestone at 6 oz. per acre + 0.25 oz. Metcel per acre + Hi-Dep or Platoon at 16-32 oz. per acre depending on severity of infestation. All applications must be made using a 90% nonionic surfactant (i.e. Penetrator, R-11, etc.).** 5% of treatments will use the above mentioned herbicides but are site specific and may only constitute using one of the above herbicides or a partial combination. Site specific due to being in close proximity to streams, groundwater, and other sensitive areas.

VII. ADDITIONAL REQUIREMENTS

A. TEMPORARY SPUR ROAD SPECIFICATIONS: Temporary spur roads are defined as any roads constructed by the Purchaser to access a harvest unit or landing which is not an existing road and may not be shown as a required road to be constructed in Table B-1. All temporary roads will be constructed to the following specifications:

1. Forest Officer shall approve the location prior to any construction.
2. Clearing and excavation shall be kept to the absolute minimum for safe truck hauling and to prevent erosion and water quality impacts. Some side-hill excavation, minor through cuts, ditching and turn piking may be required.
3. Temporary culverts may be required at ditch crossings, wet areas or other locations as directed by the Forest Officer.
4. Temporary erosion control measures may be required to meet BMP standards on the road and/or the landing area while being used.
5. At the completion of use the road shall be shaped back to natural contours, temporary culverts removed, erosion control measures installed, the disturbed areas grass seeded and the access closed to all vehicular traffic. The Forest Officer may require scarification or ripping of compacted landings and temporary spur roads.

B. GATES ON PRIVATE ROAD EASEMENTS: When using private road easements to access the timber sale area, any gate encountered on private land will be left as prescribed by the easement grantor.

C. GRID ROLLING ROAD PRISMS: Not Applicable

D. TRAFFIC CONTROL AND WARNING SIGN SPECIFICATIONS:

1. The Purchaser shall furnish, erect, and maintain all necessary barricades, suitable and sufficient lights, danger signals, signs, and other traffic control devices, and shall take all necessary precautions for the protection of the work and safety of the public. Suitable warning signs shall be provided to properly control and direct traffic as requested by the Forest Officer.

2. All road barricades, warning signs, lights, temporary signals, flagger and pilot car operations and equipment, and other protective devices, shall conform with the specifications in the Manual on Uniform Traffic Control Devices (MUTCD).

VIII. ROAD LOG AND SITE DESCRIPTIONS

Station	Work description	Materials or type of work	type or size	length or amount	Unit
	<u>General Specifications for existing road segments:</u>				
	Maintain road, shoulders and ditch to their pre-sale condition. Renovate road, shoulders and ditch to condition specified within the road notes. Purchaser is required to repair any damage to surfacing caused by operations. Seeding and Fertilizer requirements: Seed and fertilize all newly disturbed areas. This would include any disturbance along the road shoulders and ditch.				
	<u>General Specifications for New Road Construction:</u>				
	1. Slash disposal is required using the methods described in Attachment B, Section III.				
	2. Drive thru drain dips are required on the entire road. Dips are required at all grade changes and on sustained grades at a spacing not to exceed 500 feet. Final location of drain dips will be designated by the Forest Officer after the road is pioneered.				
	3. Turnouts are required on the entire road. Locations will be designated by the Forest Officer as the road is pioneered.				
	4. Seeding and Fertilizer requirements: Seed and fertilize all cut and fill slopes and disturbed areas associated with construction of turnouts and surface drainage features.				
	5. All switchbacks and curves shall have a minimum radius of 50 feet and a minimum road width of 20 feet around the switchback or as designated in the road log. Clear limits are marked on the ground. Taper cuts and fills as needed to provide for a consistent road grade around the switchback. Excess fill material can be used for turnout construction.				
	<u>Soup Creek Road</u>				
	Road maintenance begins at the junction with Highway 83 on east side (MM 64.8). This road has a native material and gravel surface. The driving surface is approximately 16 feet wide. This is an open road that receives frequent traffic from the public. Overall requirements for this roads are as follows: Maintenance and repair as directed by the Forest Officer: 3.8 miles				
	<u>Soup Creek Road Log</u>				

ATTACHMENT B

0.00	Junction with Highway 83. Begin maintenance as directed by the Forest Officer. The Soup Creek Road is part of haul route for Cub Scout, Cilly Excaline, Cilly North Soup, and Cilly Napa. Purchaser may not haul until all initial maintenance is complete and should coordinate with the other sale purchasers accordingly.				
1.30	Existing CMP. Clean inlet	earthwork		0.50	hours
1.40	Existing CMP. Clean outlet.	earthwork		0.50	hours
2.40	Open top culvert. Clean debris from culvert and outlet.	open top		1.00	hours
		earthwork		0.50	hours
2.47	Existing CMP. Clean outlet.	earthwork		0.50	hours
3.80	Junction with Cilly Creek Road on left (north). Junction with campground entrance on right (south). End maintenance.				
Segment Construction materials and work summary - Soup Creek Road					
		blading	intermediate	3.80	miles
		blading	final	3.80	miles
		earthwork	initial	2.00	hours
		open top	initial	1.00	hours
Cilly Creek Road					
	Road maintenance begins at the Soup Creek road junction (approx. 3.8 miles on the Soup Creek Road). This road has a native material surface. The driving surface is approximately 16 feet wide. Overall requirements for this road are as follows: Maintenance and repair as directed by the Forest Officer: 3.2 miles.				
Cilly Creek Road					
0.00	Begin maintenance as directed by the Forest Officer. Work includes: blading, CMP work, and weed spraying. Initial weed spraying to occur in the spring of 2017. Final weed spraying will occur post-harvest. Intermediate and final blading to occur, as needed. The Cilly Creek Road is part of haul route for Cub Scout, Cilly Excaline, and Cilly North Soup.				
1.43	Remove existing 12" CMP on a Class 2 stream. Install 24" x 40' CMP on a 40% skew. Place 10 cu. Yds. of 1 1/2"-minus gravel over CMP. Grass seed site.	earthwork		2.00	hours
		CMP	24"	40.00	feet
		gravel	1-1/2 inch	10.00	cu. yds.
		grass seed	quick cover	0.05	acres
1.46	Existing CMP. No work needed				

ATTACHMENT B

1.60	Existing CMP. End of Cub Scout road maintenance requirements.				
1.70	Junction with Lower Cilly Road (right). End of Cilly Excaline road maintenance requirements.				
1.90	Existing CMP. Clean outlet.	earthwork		1.00	hours
2.10	Existing CMP. Clean inlet and outlet	earthwork		1.00	hours
2.18	Begin pulling ditch on inside of road.				
2.20	Junction with Graves Spur on left.				
2.34	End ditch cleaning.	grass seed	quick cover	0.10	acres
2.35	Existing CMP - Cilly Creek. No work needed.				
2.40	Junction with Spur 1622 on right.				
2.50	Begin pulling ditch on inside of road.				
2.60	Existing CMP. Clean inlet and outlet.	earthwork		1.00	hours
2.89	Existing CMP. Clean inlet. End ditch cleaning.	earthwork		1.00	hours
		grass seed	quick cover	0.25	acres
2.90	Junction with Wetland Spur on right.				
2.93	Existing CMP's (double pipes) for Cilly Creek. No work needed.				
2.98	Begin cleaning ditch (left). Begin road brushing on both sides of road right-of-way.	brushing	initial	2.00	hours
3.20	End ditch cleaning, maintenance, and brushing. State/USFS boundary.	grass seed	quick cover	0.15	acres
Segment Construction materials and work summary - Cilly Creek Road					
		blading	initial	1.50	miles
		blading	intermediate	3.20	miles
		blading	final	3.20	miles
		CMP	24"	40.00	feet
		gravel	1-1/2 inch	10.00	cu. yds.
		earthwork	initial	6.00	hours
		brushing	initial	2.00	hours
		grass seed	quick cover	0.55	acres

ATTACHMENT B

		weed spraying	final	7.76	acres
<u>Lower Cilly Road</u>					
	Gated: check out 2442 key at Swan River State Forest Headquarters. Road maintenance begins at the junction with Cilly Creek Road (MP 1.7). This road has a native material surface. The driving surface is approximately 16 feet wide. This road has an inside ditch. Overall requirements for this road are as follows: Maintenance and repair as directed by the Forest Officer: 1.0 miles.				
<u>Lower Cilly Road</u>					
0.00	Junction with Cilly Creek Road. Begin maintenance as directed by the Forest Officer. Work includes: blading, drain dip maintenance, and weed spraying. Final weed spraying to occur post- harvest. Intermediate and final blading to occur, as needed.				
0.10	Existing 18" CMP. No work needed.				
0.30	Existing 36" CMP - Cilly Creek. No work needed.				
0.40	Existing 18" CMP. No work needed.				
0.60	Existing 18" CMP. No work needed.				
0.68	Existing 24" CMP. No work needed.				
0.70	Existing 18" CMP. No work needed.				
0.90	Old existing road on left. Can use for skidding purposes or landing.				
0.46	Unit 16-21 boundary. End of maintenance.				
Segment Construction materials and work summary - Lower Cilly Road					
		blading	intermediate	1.00	miles
		blading	final	1.00	miles
		weed spraying	final	2.42	acres
<u>9521 Road</u>					
	Road maintenance begins at the junction with Highway 83 (MP 66.5). This road has a native material surface. The driving surface is approximately 16 feet wide. Overall requirements for these roads are as follows:				

	- Maintenance and repair as directed by the Forest Officer: 1.9 miles.				
9521 Road					
0.00	Junction with Highway 83. Begin maintenance as directed by the Forest Officer. Work includes: blading, CMP work, and weed spraying. Final weed spraying to occur post-harvest. Intermediate and final blading to occur, as needed.				
0.58	Road Y's - stay left. Cilly Creek Road continues to the right.				
0.60	Existing gate.				
0.80	Existing 18" CMP. Clean inlet and outlet.	earthwork		0.50	hours
1.00	Existing 18" CMP. Clean inlet.	earthwork		0.50	hours
1.20	Existing 18" CMP. Clean inlet and outlet.	earthwork		1.00	hours
1.90	End maintenance.				
Segment Construction materials and work summary - 9521 Road					
		blading	intermediate	1.90	miles
		blading	final	1.90	miles
		earthwork	initial	2.00	hours
		weed spraying	final	4.61	acres
Graves Spur					
	Road reestablishment and new construction begins at the junction with the Cilly Creek Road (MP 2.2). Road reestablishment begins at the junction with Cilly Creek Road on south side (approximately MP 2.20). This road has a native material surface which is grown over. The driving surface was approximately 14 feet wide. Overall requirements for this road are as follows: Reestablishment, renovation, and new construction as directed by the Forest Officer: 3,264 feet or 0.62 miles.				
Graves Spur					
0+00	Junction with Cilly Creek Road. Begin reestablishment of road prism and clear limits as directed by the Forest Officer. Work includes: tree and brush removal, clearing turnouts, blading, CMP work, and weed spraying. Initial weed spraying to occur in the spring of 2017. Final grass seeding and weed spraying will occur post-harvest. Intermediate and final blading to occur, as needed.				

ATTACHMENT B

0+69	Remove Kelly hump. Reinstall post- harvest.	earthwork		1.00	hours
2+64	Road Y's - stay right.				
5+09	Start gravel lift. Place 110 cu. yds. of pit run over 208 feet.	gravel	pit run	110.00	cu. yds.
7+25	Install 18" x 26' CMP cross drain pipe. Construct lead out ditch. Place 10 cu. yds. of 1 1/2"-minus gravel over CMP. Grass seed site.	earthwork		2.00	hours
		CMP	18"	26.00	feet
		gravel	1-1/2 inch	10.00	cu. yds.
		grass seed	quick cover	0.05	acres
7+88	End gravel lift of pit run.				
10+18	Old road junction. Stay right.				
16+25	Boundary of unit 16-14.				
<u>Graves Spur Road Log - New Construction</u>					
18+01	Begin new road construction of a 14-foot wide road. Grass seed road upon completion of construction.	construction		14.60	stations
20+81	West boundary for unit 16-14. Entering SMZ. Start gravel lift. Place 60 cu. yds. of pit run over 110 feet.	gravel	pit run	60.00	cu. yds.
21+33	Install 30" x 34' CMP on Class 2 stream. Place 10 cu.yds. of 1 1/2"-minus over CMP. Slash filter at toe of fill. Grass seed site.	earthwork		2.00	hours
		CMP	30"	34.00	feet
		gravel	1-1/2 inch	10.00	cu. yds.
		grass seed	quick cover	0.05	acres
21+91	End gravel lift. Boundary for unit 16-12. Leaving SMZ.				
22+34	Build wide corner for log haul. Begin cut/fill for a 14-foot road with an inside ditch.				
22+96	Construct drain dip with ditch intercept and lead out to right.	drain dip		1.00	each
		earthwork		2.00	hours
23+68	+6% grade. Begin no side casting into SMZ. Slash filter windrow may be required at time of construction.				
24+37	+6% grade				

ATTACHMENT B

25+07	+4.5% grade				
25+73	Grade break - 0%				
26+58	+10% grade				
27+48	+3% grade				
27+67	+2% grade. End no side casting into SMZ.				
28+64	+5% Edge of unit boundary (right).				
29+33	+5%				
29+97	+5%				
30+66	+5%				
31+63	+3%				
32+64	EOP. Build landing/turn around.				
Segment Construction materials and work summary - Graves Spur					
		construction		14.60	stations
		drain dip		1.00	each
		blading	intermediate	0.62	miles
		blading	final	0.62	miles
		CMP	30"	34.00	feet
		CMP	18"	26.00	feet
		gravel	1-1/2 inch	20.00	cu. yds.
		gravel	pit run	170.00	cu. yds.
		earthwork	initial	6.50	hours
		earthwork	final	0.50	hours
		grass seed	quick cover	0.10	acres
		grass seed	initial	0.47	acres
		grass seed	final	1.50	acres
		weed spraying	final	1.50	acres
Spur 1622					
	Road construction and reestablishment begins at the junction with Cilly Creek Road (MP 2.4). This road has a native material surface. Construct and reestablish road right of way to 14 feet wide. Overall requirements for this road are as follows: Road construction and reestablishment as directed by the Forest Officer: 1,190 feet or 0.23 miles				
Spur 1622 Road Log					

ATTACHMENT B

0+00	Junction with Cilly Creek Road. Begin new construction. Work includes: new construction, reestablishment of road to 14 feet, blading, and weed spraying. Initial grass seeding upon completion of construction. Final grass seeding and weed spraying to occur post- harvest. Intermediate and final blading to occur, as needed. Fill in ditch during harvest operations. Reestablish ditch post-harvest. Install tank trap post- harvest.	construction		403.00	feet
		earthwork		1.00	hours
1+81	+2% grade				
2+36	0%				
2+92	0%				
3+40	0%				
4+03	End new construction. Tie in with existing road. Reestablish 14-foot road. Remove brush and trees ranging from saplings to merchantable trees.	clearing	initial	787.00	feet
8+16	Build drain dip (right).	drain dip		1.00	each
		earthwork		1.00	hours
11+90	End of project. Build landing and turn around.				
Segment Construction materials and work summary - Spur 1622					
		construction		4.00	stations
		drain dip		1.00	each
		blading	intermediate	0.23	miles
		blading	final	0.23	miles
		earthwork	initial	1.00	hours
		earthwork	final	1.00	hours
		clearing	initial	20.00	hours
		grass seed	initial	0.13	acres
		grass seed	final	0.55	acres
		weed spraying	final	0.55	acres
Wetland Spur					

ATTACHMENT B

	New road construction for Wetland Spur begins at the junction with Cilly Creek Road (MP 2.9). The road will be native surface and a minimum of 14 feet wide. Surface drainage will consist of rolling drain dips and grade reversals. Install drain dips approximately every 500 feet. Turnouts will be inter-visible or at least every 0.25 miles. The road location is identified as a centerline marked with pink fluorescent flagging and clearing limits are marked with yellow ribbon and paint facing the centerline. Overall requirements for this road are as follows: New construction, maintenance, and repair: 7,835 feet or 1.48 miles				
Wetland Spur					
0+00	Junction with Cilly Creek Road. Begin new construction. Install gate. Unmarked SMZ on left - no side casting. Initial grass seeding to be completed upon completion of construction.	construction		78.40	stations
		earthwork		1.00	hours
		gate		1.00	each
1+05					
1+80	+3%				
2+60	0%				
3+20	0%				
3+80	0%				
4+80	0%. Install drain dip between this station and the next station.	earthwork		1.00	hours
		drain dip		1.00	each
5+48	+8% - slight turn to right.				
6+14	+5% - cornering right				
6+48	Cornering left. Starting into draw crossing.				
6+79	Draw crossing. Install 18"x32' CMP. Spread approx. 4' of fill with 110 cu. yds. of pit run. Cap with 30 cu. yds. of 1 1/2"-minus over CMP. Grass seed site.	earthwork		1.00	hours
		CMP	18"	32.00	feet
		gravel	1-1/2 inch	30.00	cu. yds.
		gravel	pit run	110.00	cu. yds.
		grass seed	quick cover	0.05	acres
7+05	Begin full bench construction for approximately 100 feet.				

ATTACHMENT B

7+39	+12%				
8+01	0%. End full bench construction.				
8+55	0%				
9+32	0%				
9+79	0%				
10+17	0%. Install drain dip between this station and the next station.	earthwork		1.00	hours
		drain dip		1.00	each
10+82	+5%				
11+55	+5%				
12+41	+5%				
12+89	+8%				
13+53	+8%				
14+27	+5%. Section line between 9 & 16.				
14+83	+5%. Install drain dip.	earthwork		1.00	hours
		drain dip		1.00	each
15+53	+5%				
15+89	0%. Cornering to right.				
16+40	+8%				
16+81	-5%				
17+42	+5%				
17+81	+5%				
18+60	0%. Grade break.				
19+13	0%. Grade break				
19+77	-2%				
20+70	-2%				
21+63	-2%				

ATTACHMENT B

22+29	0%				
22+77	0%				
23+80	0%				
24+33	0%				
24+93	0%				
26+00	0%				
27+51	0%				
29+27	0%				
29+76	-5%				
30+44	-5%				
31+16	-2%				
31+43	-4% Begin fill using material available between stations 31+43 through 32+73.				
31+86	-4% Dry draw				
32+29	-23% End fill.				
32+73	+6%				
32+93	+6%				
33+23	+6% Entering SMZ - boundary.				
33+58	0%				
33+97	-22% Dropping into creek crossing. Begin fill using material available on site or place 200 cu. yds. of pit run at a depth of 6 feet over 66 feet. Place a gravel cap over the pit run with 20 cu. yds. of 1 1/2"-minus.				
	gravel	1-1/2 inch	20.00	cu. yds.	
	gravel	pit run	200.00	cu. yds.	
34+15	Install 30"x40' CMP. Place 10 cu. yds. of rock armor at the inlet/outlet.				
	earthwork		3.00	hours	
	CMP	30"	40.00	feet	
	rock armor		10.00	cu. yds.	
	grass seed	quick cover	0.05	acres	
34+63	+15% End fill.				

ATTACHMENT B

34+81	+15%				
35+13	+10%				
35+65	0%				
37+86	-4%				
38+86	-5%				
39+53	0%				
40+01	-5%				
42+18	-10%				
42+86	0%				
46+93	0% Begin slight corner to right				
47+61	+6%				
48+14	0%				
48+65	+3%				
49+32	-5%				
49+96	+5%				
55+78	-5%				
56+85	+5% Cornering right finishing. Straightening out.				
58+50	+7%				
58+92	0%				
60+05	+2%				
60+82	0%				
61+17	+10%				
61+58	+8%				
62+54	+10%				

ATTACHMENT B

62+92	+3% Move material between stations 61+17 through 62+92 to smooth grade.				
63+69	+5%				
64+19	+8%				
64+89	+8%				
65+25	+12% Cornering hard right				
65+85	+6%				
66+56	+5%				
67+74	+10%				
68+77	0%				
69+10	+5%				
70+15	0%				
71+25	-10%				
71+92	-10% Old road and SMZ below. 50% side slopes				
72+45	-5% Old road and boundary below				
73+30	-10% SMZ below. 40% side slopes				
73+60	-5% Connecting to old road				
74+07	-7%				
74+61	-5%				
75+22	0% Old road bed				
75+59	+5% Cornering left into SMZ				
76+07	-5% Begin cutting down into native material to a depth of 1 foot below the natural surface. Place filter fabric for 80 feet. Place 40 cu. yds. of pit run over filter fabric. Place 20 cu. yds. of drain rock over the pit run (armored ford crossing).	earthwork		3.00	hours
		gravel	pit run	40.00	cu. yds.
		drain rock	4" minus	20.00	cu. yds.
		Const. fabric		80.00	feet

ATTACHMENT B

76+80	End down cutting of native material, filter fabric, and pit run placement.				
78+35	+2% EOP. Build landing. Option to extend a temporary road further into the unit if needed.				
Segment Construction materials and work summary - Wetland Spur					
		construction		78.40	stations
		drain dip		16.00	each
		gate		1.00	each
		blading	initial	1.48	miles
		blading	intermediate	1.48	miles
		blading	final	1.48	miles
		CMP	18"	32.00	feet
		CMP	30"	40.00	feet
		gravel	1-1/2 inch	50.00	cu. yds.
		gravel	pit run	350.00	cu. yds.
		rock armor		10.00	cu. yds.
		drain rock	4" minus	20.00	cu. yds.
		Const. fabric		80.00	feet
		earthwork	initial	24.00	hours
		grass seed	quick cover	0.10	acres
		grass seed	initial	2.52	acres
		grass seed	final	2.52	acres
		weed spraying	initial	3.24	acres
		weed spraying	final	3.24	acres
<u>Spur 918</u>					
	Road establishment and new construction begins at the junction with Spur 9-15D (MP 0.1). The road will be native surface and a minimum of 14 feet wide. Currently the spur is an established skid trail. Surface drainage will consist of rolling drain dips. The road location is identified as a centerline marked with pink fluorescent flagging. Overall requirements for this road are as follows: Renovation, new construction, and maintenance as directed by the Forest Officer: 1,876 feet or 0.36 miles				
<u>Spur 918 Road Log</u>					
0+00	Junction with Spur 9-15D. Begin renovation as directed by the Forest Officer. Work includes: renovating road to 14 feet, stump removal, and maintenance. Final grass seeding to occur post -harvest. Intermediate and final blading to occur, as needed.	clearing	initial	709.00	feet
7+09	End of existing skid trail.				

<u>Spur 918 Road Log - New Construction</u>					
7+09	Begin new construction.	construction		12.00	stations
11+96	+3% grade				
14+03	Build drain dip (left)	earthwork		1.00	hours
		drain dip		1.00	each
17+80	Build drain dip (left)	earthwork		1.00	hours
		drain dip		1.00	each
18+76	End new construction. Build landing; turn around.				
Segment Construction materials and work summary - Spur 918					
		construction		12.00	stations
		drain dip		2.00	each
		blading	intermediate	0.36	miles
		blading	final	0.36	miles
		earthwork	initial	2.00	hours
		clearing	initial	18.00	hours
		grass seed	initial	0.54	acres
		grass seed	final	0.86	acres
		weed spraying	final	0.86	acres
<u>Spur 9-15D</u>					
	Road maintenance and new construction begins at the junction with 9521 Road (MP 1.9). This road has a native material surface. The driving surface is approximately 14 feet wide. Overall requirements for this road are as follows: Maintenance and new construction as directed by the Forest Officer: 3,629 feet or 0.69 miles				
<u>Spur 9-15D Road Log</u>					
0.00	Junction with 9521 Road. Begin maintenance as directed by the Forest Officer. Work includes: brushing, new construction, blading, gravel placement, and weed spraying. Initial weed spraying to occur in the spring of 2017. Final grass seeding and weed spraying to occur post- harvest. Intermediate and final blading to occur, as needed. Begin brushing both sides of road right-of-way.	brushing	initial	3.00	hours
0.10	Junction with Spur 918				
0.40	Existing road ends. End initial weed spraying and brushing. Beginning of existing skid trail.				
<u>Spur 9-15D - New Construction</u>					

ATTACHMENT B

0+00	Begin new construction. Establish 14 foot road. Grass seed upon completion of construction.	construction		15.00	stations
0+77	+3%				
3+22	Road begins to corner left. Leave existing skid trail.				
3+59	cornering left				
4+50	Corner ends.				
10+94	Pocket of Yew brush.				
11+51	Start gravel lift. Spread 90 cu. yds. of pit run for approximately 168 feet.	gravel	pit run	90.00	cu. yds.
13+19	End gravel lift.				
13+86	Start gravel lift. Spread 40 cu. yds. of pit run for approximately 85 feet.	gravel	pit run	40.00	cu. yds.
14+71	End gravel lift.				
15+17	EOP. Construct landing/turn around.				
Segment Construction materials and work summary - Spur 9-15D					
		construction		15.00	stations
		blading	initial	0.40	miles
		blading	intermediate	0.69	miles
		blading	final	0.69	miles
		gravel	pit run	130.00	cu. yds.
		brushing	initial	3.00	hours
		grass seed	initial	0.49	acres
		grass seed	final	1.67	acres
		weed spraying	initial	0.97	acres
		weed spraying	final	1.67	acres

IX. SPECIFICATIONS AND DRAWINGS

A. REQUIREMENTS: Any construction requirements or structures shown in the Timber Sale Contract or Attachment B shall be constructed and installed by the Purchaser to specifications in this section. Structures shall be constructed at locations shown in the Road Log and as specified or staked by the Forest Officer.

B. SPECIFICATIONS:

1. Road Construction Fabric: When road construction fabric is required the following specifications

shall be met: minimum twenty mills thick with minimum trapezoid tear strength (ASTMD-1117-80) of 110 and mullen burst strength (ASTMD-3786-80) of minimum 375 psi; (e.g. Mirafi 500x or AMOCO 200208).

C. SPECIFICATION TABLES AND DRAWINGS:

GENERAL SPECIFICATIONS

GRASS SEEDING SPECIFICATIONS

GRAVEL AND END HAUL FILL MATERIAL SPECIFICATIONS

CLEAR LIMITS AND TYPICAL CROSS SECTIONS

CLEAR LIMIT DEFINITIONS FOR EXISTING ROADS

STANDARD DRAIN DIP FOR SINGLE LANE ROAD

SLASH FILTER WINDROW

ADJUSTABLE GATE SPECIFICATIONS

HIGHWAY SAFETY SIGNS

WARNING SIGN SPECIFICATIONS

CULVERT REQUIREMENTS

GENERAL SPECIFICATIONS	
<p style="text-align: center;">ALIGNMENT</p> <p>Minimum Curve Radius:</p> <p>Switchbacks: 50 Feet</p> <p>Curves: As marked on the ground</p>	<p style="text-align: center;">CUT SLOPE RATIO</p> <p>Common excavation: 1:1 Angular Rock: 3/4:1 Solid Rock: 1/4:1</p> <p>Maximum tolerance: plus 15% minus 0%</p>
<p style="text-align: center;">ROAD GRADE MAXIMUM</p> <p>Favorable: 12%</p> <p>Adverse: 8%</p> <p>Grades as shown in the Road Log</p>	<p style="text-align: center;">FILL SLOPE RATIO</p> <p>Common material: 1-1/2:1 Angular rock: 1-1/3:1</p> <p>Maximum tolerance: plus 15% minus 0%</p>
<p style="text-align: center;">DITCHES</p> <p>Width: 3 feet</p> <p>Depth: 1 foot</p> <p>Located as shown in the Road Log or as directed by the Forest Officer</p>	<p style="text-align: center;">TURNOUTS</p> <p>Length: 75 feet</p> <p>Width: 7 feet</p> <p>Located by Purchaser and approved by the Forest Officer. Spacing will be inter-visible as topography allows.</p>
<p style="text-align: center;">USABLE ROAD SURFACE</p> <p>Tangents: 14 feet</p> <p>Curves: 16 feet (radius over 75 feet) 20 feet (radius under 75 feet)</p> <p>Switchbacks: 22 feet</p> <p>Slough widening: (in addition to usable road surface) Tangents: 1 foot Curves and all fills over 6 feet height: 2 feet.</p>	<p style="text-align: center;">TURNAROUNDS</p> <p>Dimensions: large enough to safely turn around a long wheel base 2-wheel-drive pickup.</p> <p>Location: at or near the end of all dead end roads as approved by the Forest Officer.</p>

GRASS SEEDING SPECIFICATIONS

A. SEED REQUIREMENTS: The Purchaser shall furnish certified noxious weed-free, pure live seed mixture(s) and fertilizer in the amounts shown in Table B-2. Total pounds mixed seed is pure live seed, corrected for germination and purity. Germination and purity tests must have been conducted within the last 6 months prior to delivery. Purchaser shall furnish documentation of germination and purity tests to the Forest Officer prior to application.

B. APPLICATION REQUIREMENTS:

1. Fertilizer and seed may be applied with a hand spreader or power blower, which adjusts to distribute seed evenly at the specified rate while limiting application to the desired area. Seed and fertilizer shall be applied separately. Mixing of seed and fertilizer is prohibited.
2. Seed and fertilizer shall be applied as listed in the following tables. In the event weather conditions or time of year are not conducive for successful seed establishment, the Forest Officer may require a different application schedule from the ones stated.
3. Application estimates are approximate figures only to be used for estimating purposes.

SEEDING CONCURRENT WITH WET CULVERT INSTALLATION.	
Areas shown in this table shall be seeded within one day of culvert installation, or as otherwise directed by the Forest Officer.	
SEED MIXTURE: QUICK COVER MIX	
Species	Pounds per acre
Tall Fescue	6
"Durar Hard Fescue	3
Slender Wheatgrass	6
Red Top	3
Annual Rye	3
Total Pounds mixed seed per acre	
21	
Estimated acres	
0.75	
Total Pounds mixed seed	
15.75	

APPLICATION ESTIMATES – QUICK COVER MIX		
Fertilizer: none required.		
Areas To Be Seeded	Remarks	Estimated Acres
Cilly Creek Road	MM 1.43	0.05
Cilly Creek Road	MM 2.34	0.10
Cilly Creek Road	MM 2.89	0.25
Cilly Creek Road	MM 3.20	0.15
Graves Spur	7+25	0.05
Graves Spur	21+33	0.05
Wetland Spur	6+79	0.05
Wetland Spur	34+15	0.05
Total Acres		0.75

SEEDING CONCURRENT WITH ROAD CONSTRUCTION		
<p>Areas shown in this table shall be seeded and fertilized concurrent with initial road construction according to the following schedule:</p> <p>Cut slopes shall be seeded within <u>7 calendar days</u> of the day that each segment of cut slope is rough shaped with the dozer or excavator. A cut slope segment is defined as one day's work regardless of the amount of work accomplished or the length of the cut slope. Even if the driving portion of the road is not shaped, graded or drivable, cut slope seeding is still required.</p> <p>Fill slopes, ditches, shoulders of the road and other disturbed areas shall be seeded within <u>15 calendar days</u> after completion of each road segment.</p>		
SEED MIXTURE – SEEDING CONCURRENT WITH CONSTRUCTION		
Species	Pounds per acre	
Tall Fescue	6	
“Durar” Hard Fescue	3	
Slender Wheatgrass	6	
Red Top	3	
Annual Rye	3	
	Total Pounds mixed seed per acre	21
	Estimated acres	4.15
	Total Pounds mixed seed	87.15
FERTILIZER		
Analysis (N-P-K) 16-16-16	Pounds Per Acre	200
	Total Pounds Fertilizer	830

APPLICATION ESTIMATES – SEEDING CONCURRENT WITH CONSTRUCTION		
Road Name	Length (feet)	Estimated Acres
Graves Spur	1,463	0.47
Spur 1622	403	0.13
Wetland Spur	7,835	2.52
Spur 918	1,167	0.54
Spur 9-15D	1,517	0.49
	Total Acres	4.15

SEEDING FOLLOWING FINAL BLADING		
Areas shown in this table shall be seeded and fertilized within 15 calendar days after completion of final road blading and shaping.		
SEED MIXTURE - SEEDING FOLLOWING FINAL BLADING		
Species	Pounds per acre	
Tall Fescue	6	
"Durar" Hard Fescue	3	
Slender Wheatgrass	6	
Red Top	3	
Annual Rye	3	
	Total Pounds mixed seed per acre	21
	Estimated acres	6.6
	Total Pounds mixed seed	138.6
FERTILIZER		
Analysis (N-P-K) 16-16-16	Pounds Per Acre	200
	Total Pounds Fertilizer	1,320

APPLICATION ESTIMATES – SEEDING FOLLOWING FINAL BLADING		
Road Name	Length (feet)	Estimated Acres
Graves Spur	3,264	1.5
Spur 1622	1,190	0.55
Wetland Spur	7,835	2.52
Spur 918	1,876	0.86
Spur 9-15D	1,517	1.17
	Total Acres	6.6

GRAVEL AND ROCK SPECIFICATIONS	
Material	Specifications
1 1/2" minus crushed gravel	Crushed gravel. Well graded. Fine fraction (minus 200 sieve) not to exceed 15%
Pit run gravel	Native gravel, well graded, with binder, compactable and not containing any rocks over 4" diameter.
Drain rock	1" - 3" diameter, screened clean rock.
<p>General Large Rock Requirements</p> <p>Stone shall be hard, durable, angular in shape, resistant to weathering and weather action, and free from overburden, soil, and organic matter. Stone must be hard enough so pieces do not fracture or break during the loading, hauling, or placement activities. Neither breadth nor thickness of stone shall be less than one-third its length. Rounded stone or boulders from a streambed will not be accepted unless authorized by the State.</p>	
Rock armor	Large rock with most sizes ranging from 6" to 12" diameter, used to armor fill slopes and catch basins.
Talus rock	Large rock of variable sizes used as load-bearing fill or drainage rock in soft areas or French drains, as approved by Forest Officer.
Energy dissipators	Large rock 18-24" diameter placed in streams at culvert outlets.

SPECIFICATION DRAWINGS

Clear Limits and Typical Cross Sections

CLEARPK.WPG

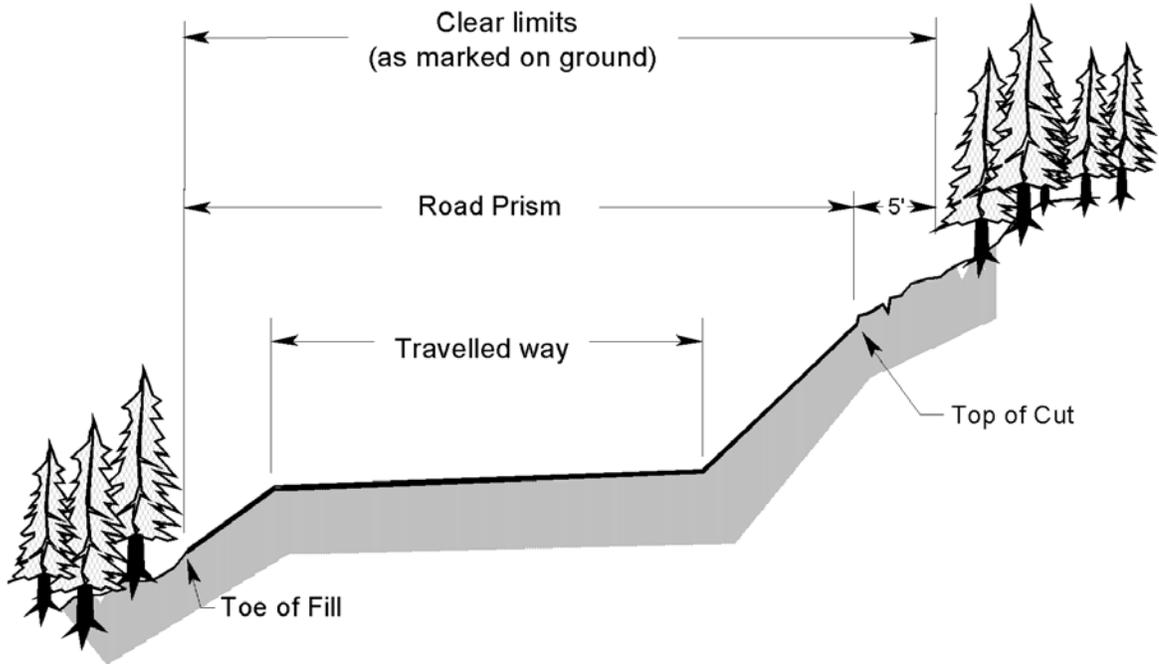


Figure I: Clear limits for New Construction

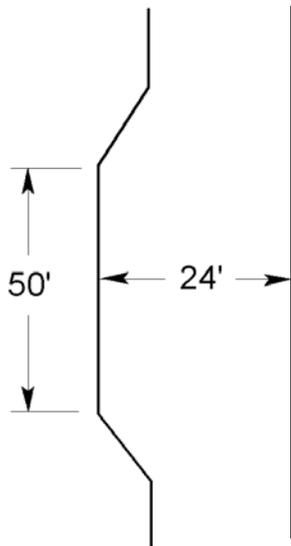


Figure II:
Typical turn out
construction





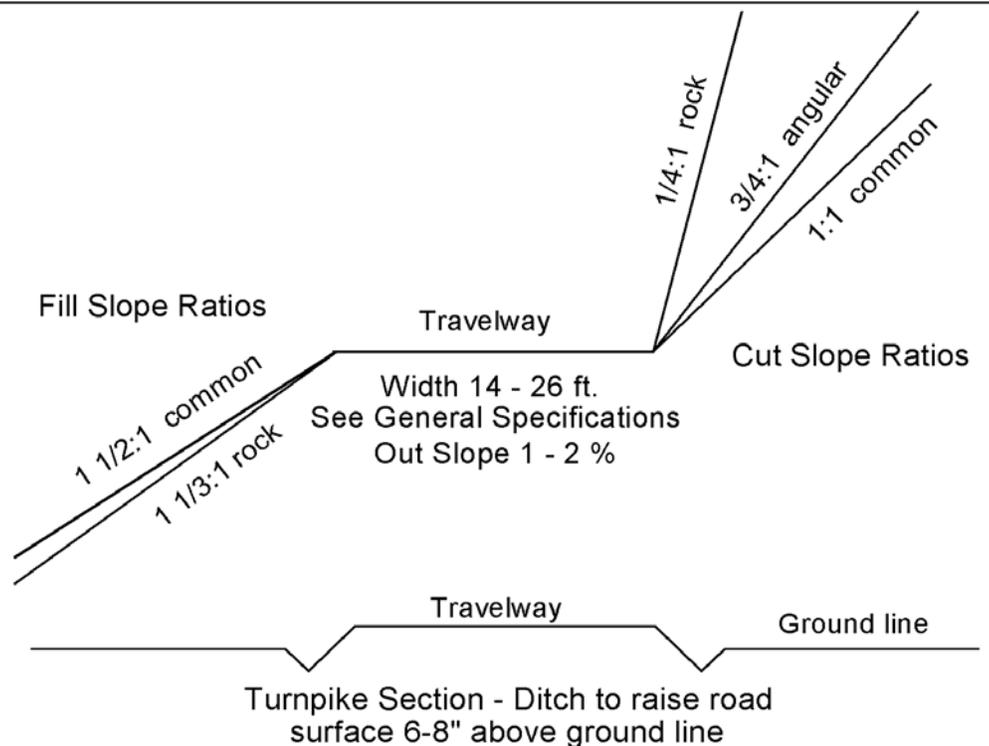


Figure III: Typical Cross Sections

CLEAR LIMIT DEFINITIONS FOR EXISTING ROADS

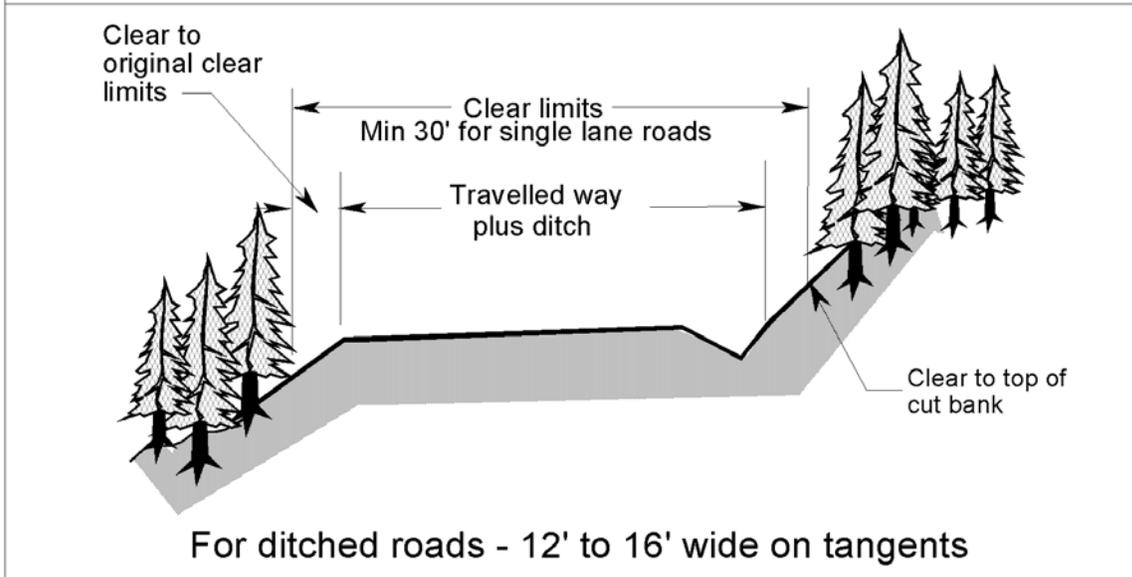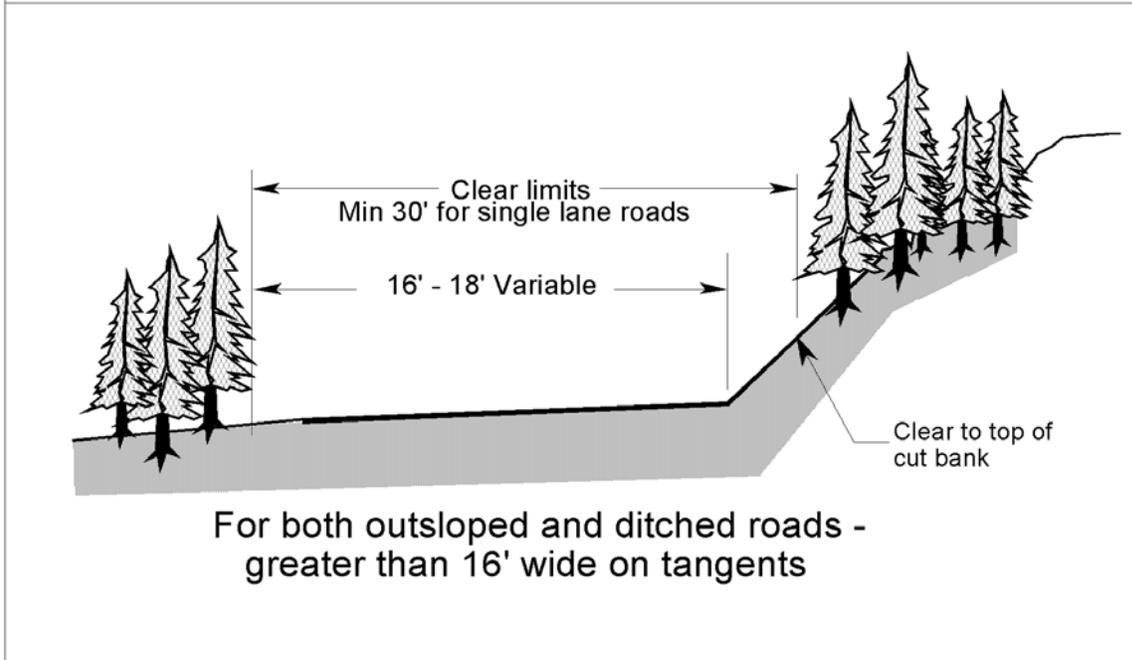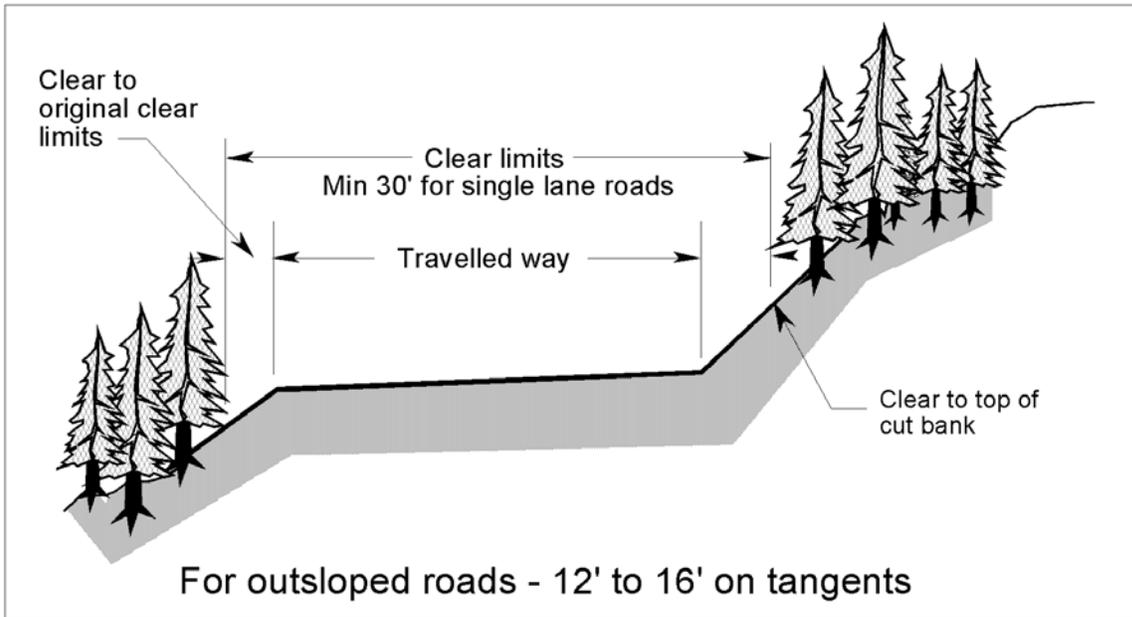


STANDARD DRAIN DIP FOR SINGLE LANE ROAD

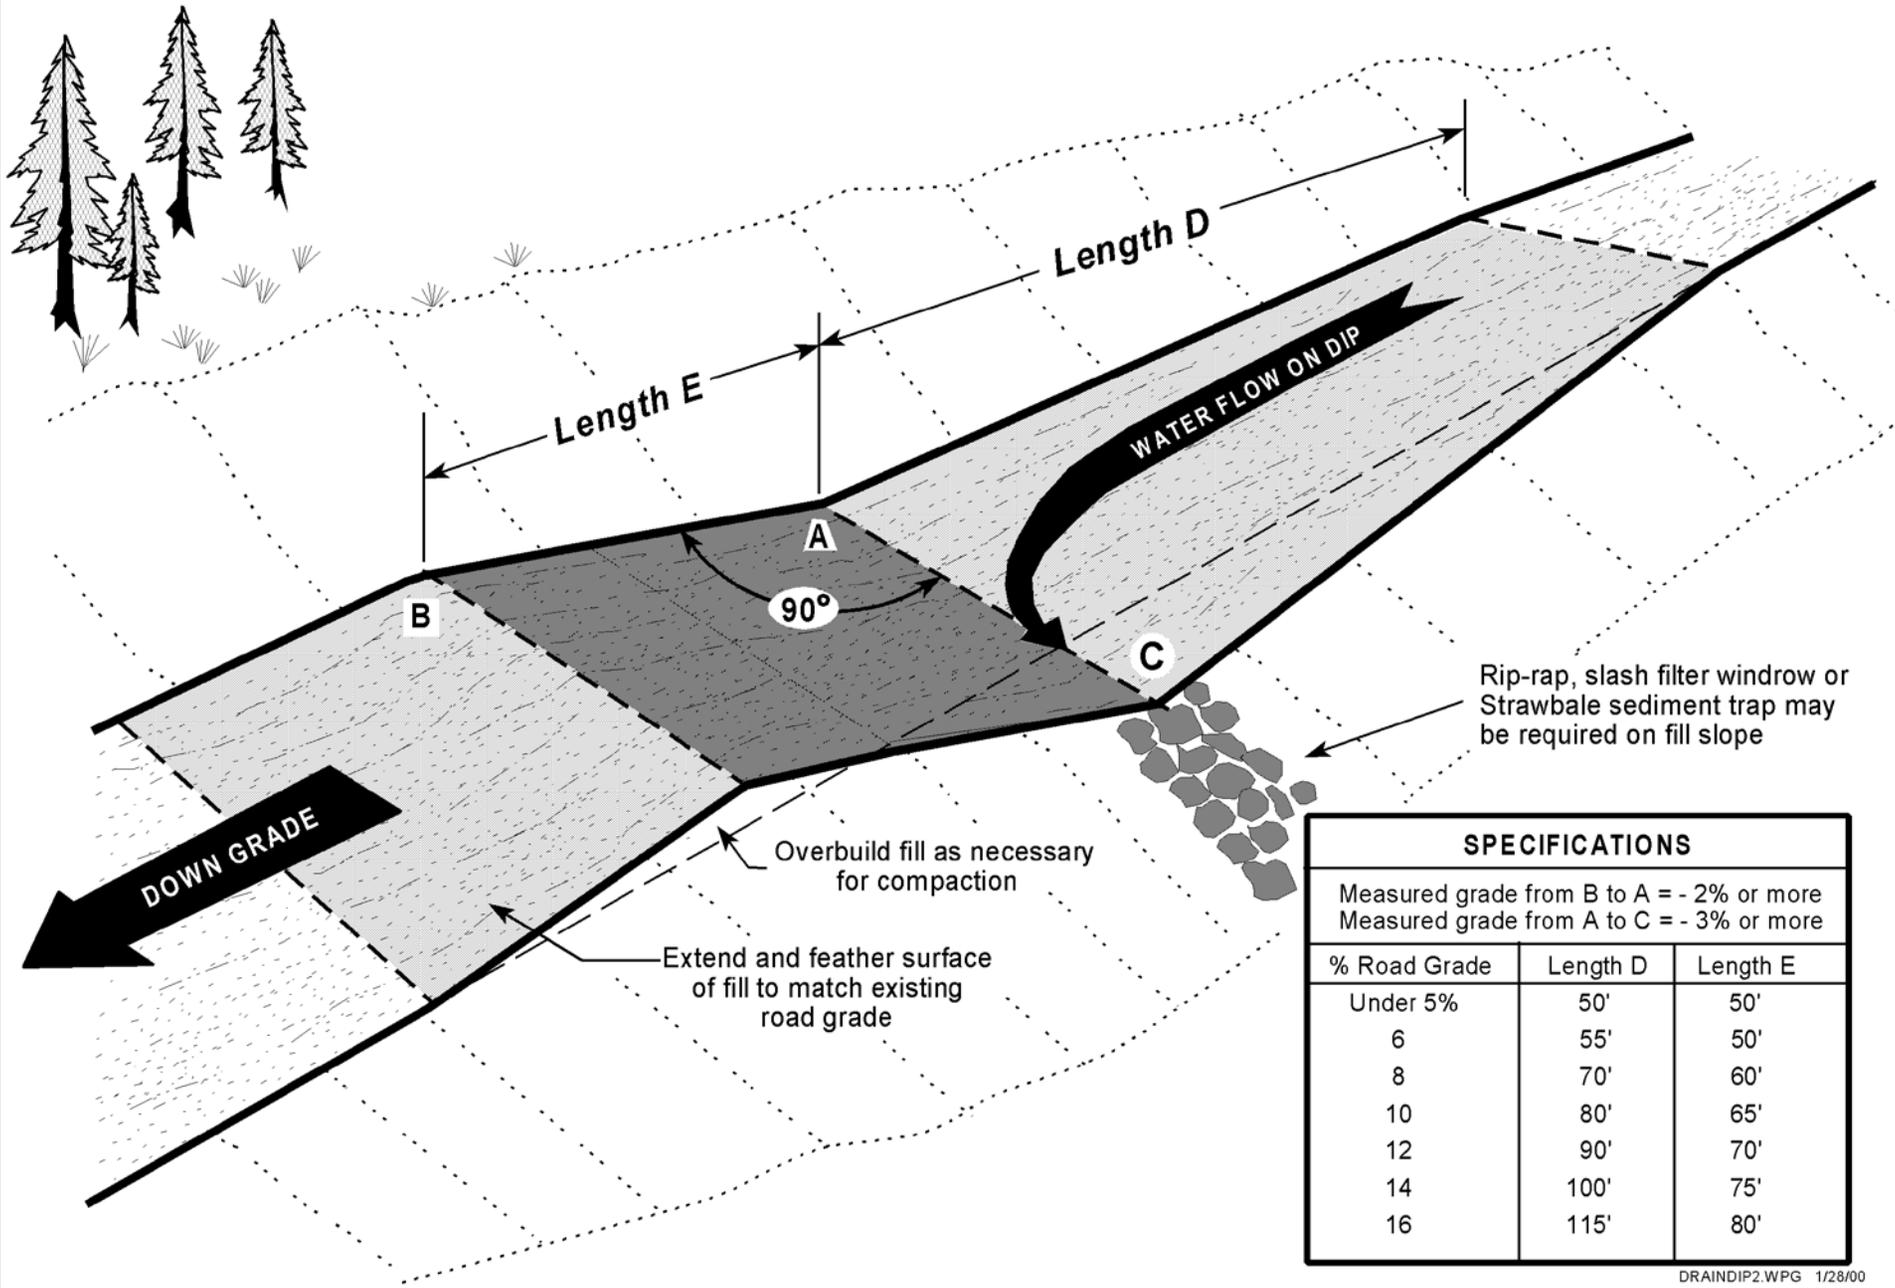


SPECIFICATIONS		
Measured grade from B to A = - 2% or more		
Measured grade from A to C = - 3% or more		
% Road Grade	Length D	Length E
Under 5%	50'	50'
6	55'	50'
8	70'	60'
10	80'	65'
12	90'	70'
14	100'	75'
16	115'	80'

WINDROW DIMENSIONS

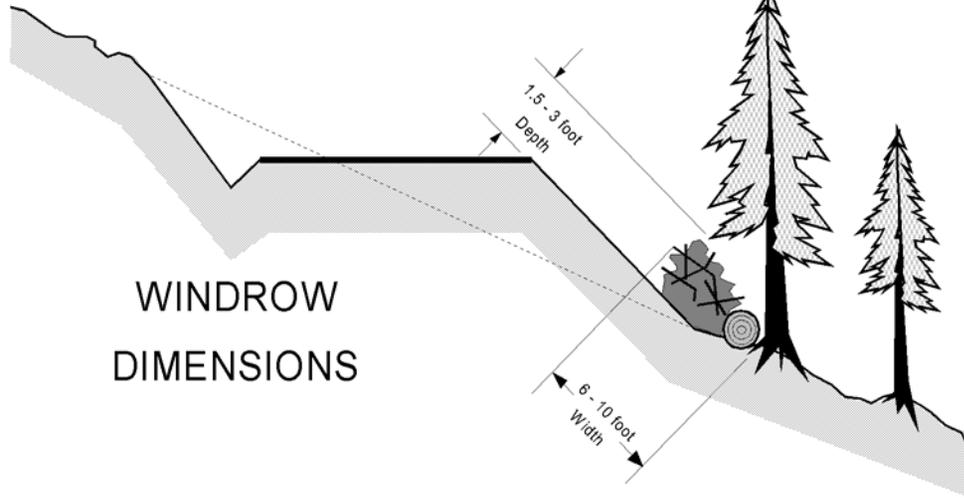

TYPICAL INSTALLATION

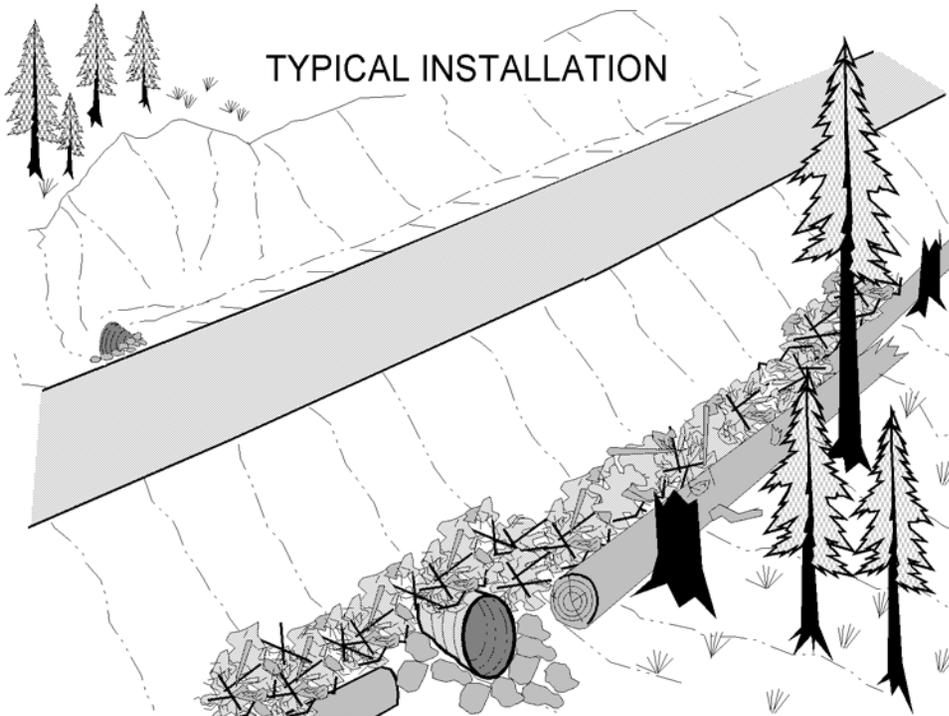

SLASH FILTER WINDROW SPECIFICATIONS

Materials must be stockpiled prior to construction of windrows.

Cull logs must be anchored in place against undisturbed stumps, large rocks or trees at the toe of the fill.

Slash must be placed above the logs with a backhoe and tamped into place with the bucket.

Slash should be tamped so it is embedded approximately 6 inches into the fill surface to prevent water from running under the windrow.

Slash, limbs and tops must be smaller than 12 feet long and 6 inches diameter. Stumps and root wads may not be used.





Anchor logs must be larger than 16 inches diameter. Reasonably sound cull logs may be used.

Windrows shall not interfere with the functioning of drainage structures or block stream channels.


All locations will be staked or flagged by the Forest Officer.

When installing windrows over the top of culverts, pipe length must be increased by 3 - 4 feet to accommodate windrow placement.

ADJUSTABLE GATE SPECIFICATIONS

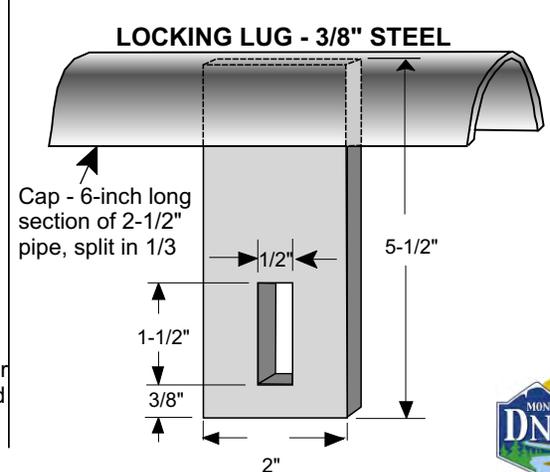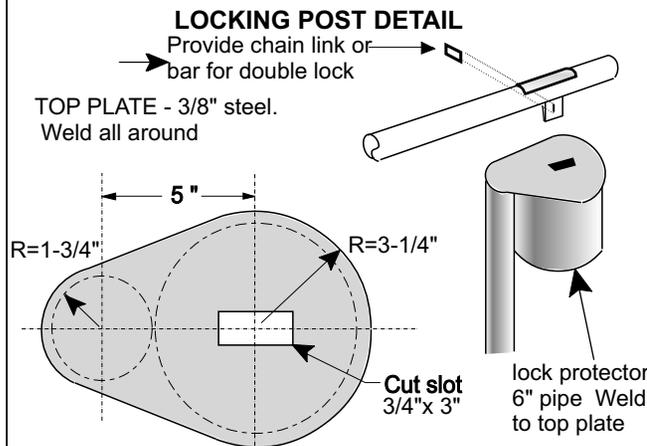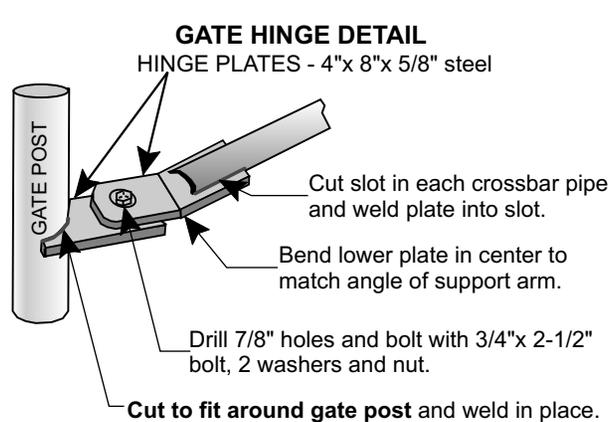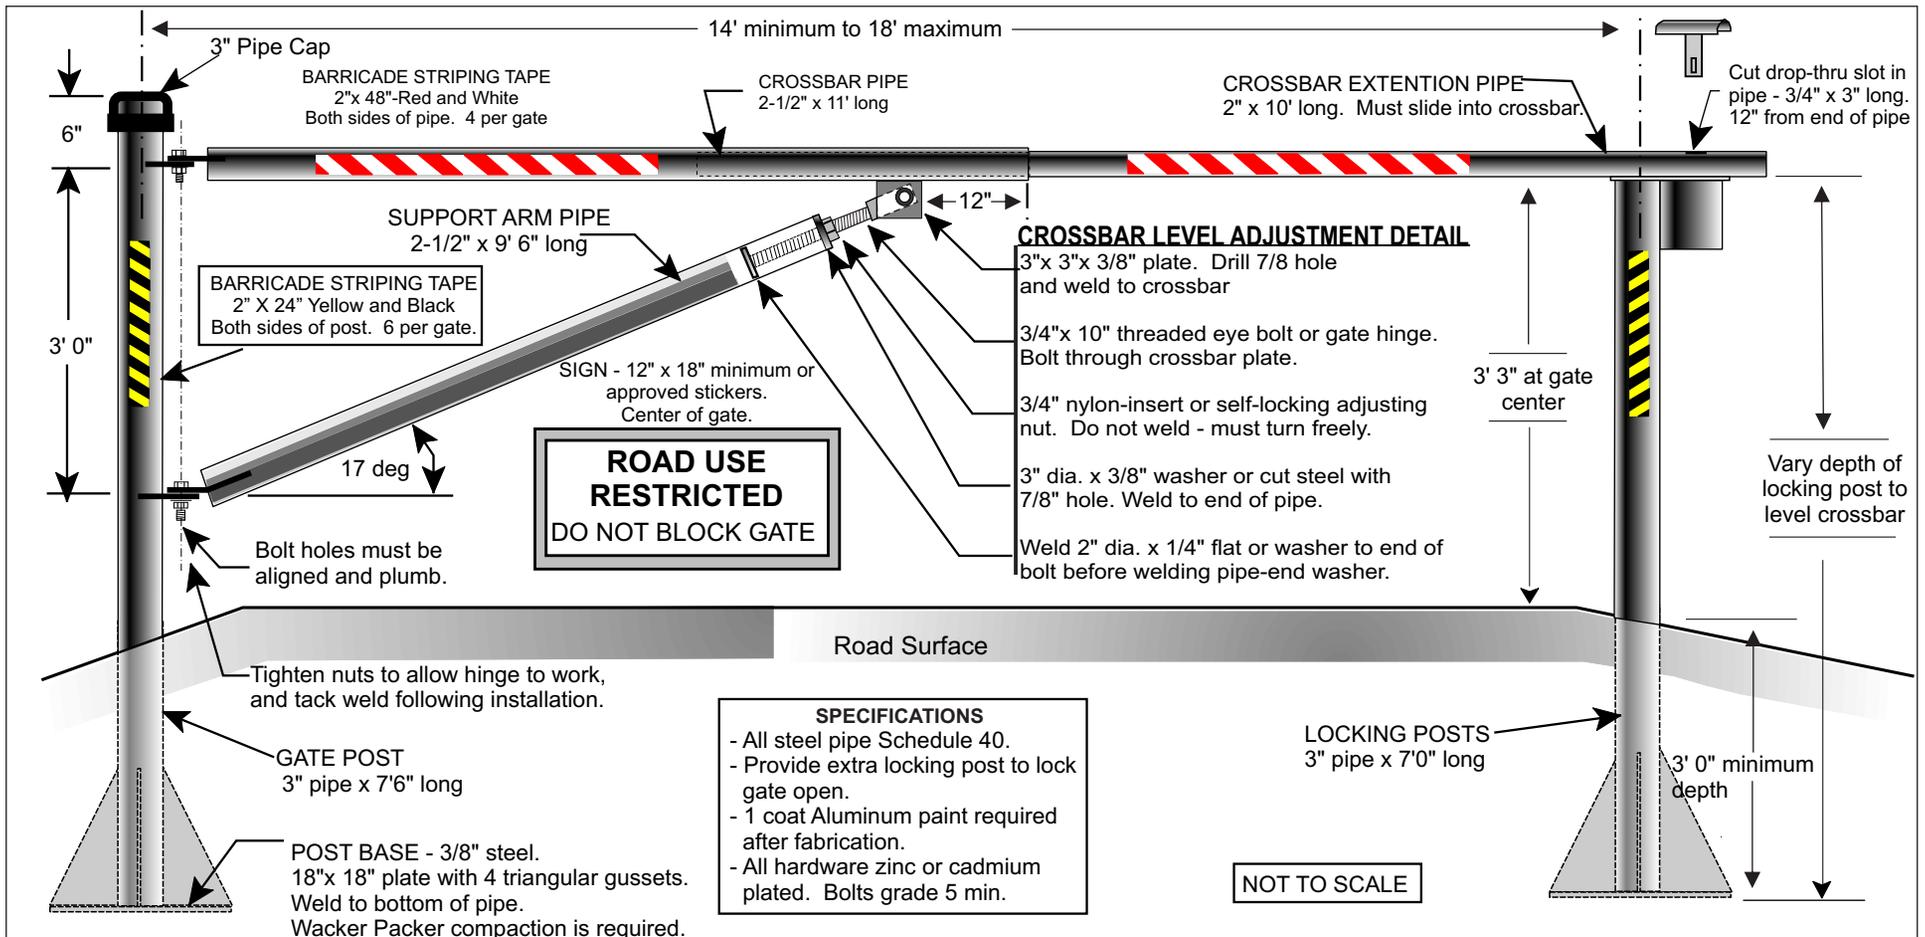

HIGHWAY SAFETY SIGNS

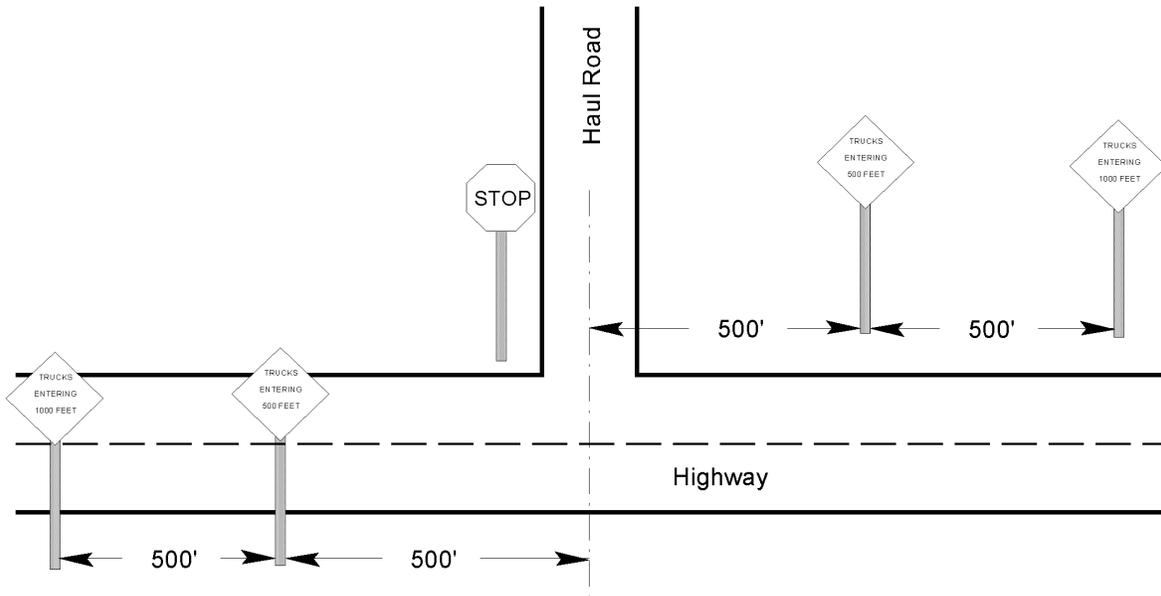




Materials Required

- 1 each 4"x4"x10' full pressure treated wood post.
- 4 each 4"x4"x14' full pressure treated wood post.
- 1 each 30"x30" STOP sign, aluminum, octagon, white letters on red.
- 2 each 36"x36" TRUCKS ENTERING 500' sign, aluminum, diamond, black letters on orange, center hinged.
- 2 each 36"x36" TRUCKS ENTERING 1000' sign, aluminum, diamond, black letters on orange, center hinged.
- Mounting hardware as required.


Specifications

1. All signs shall have reflectorized background and shall meet all specifications as per Manual on Uniform Traffic Control Devices.
2. All signs shall be new condition.
3. Bottom of sign shall be 5' vertical as measured from the roadway surface.
4. Lateral clearance of "TRUCKS ENTERING" signs shall be 10' as measured from the edge of pavement to the edge of sign.

Warning Sign Specifications

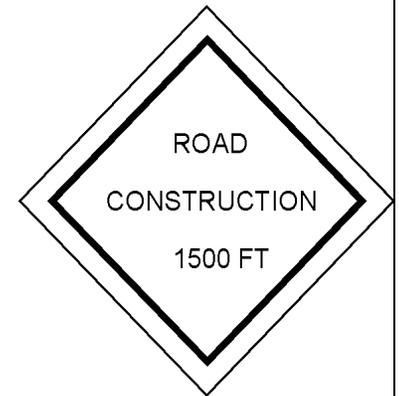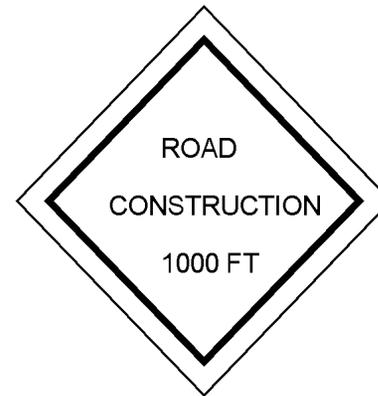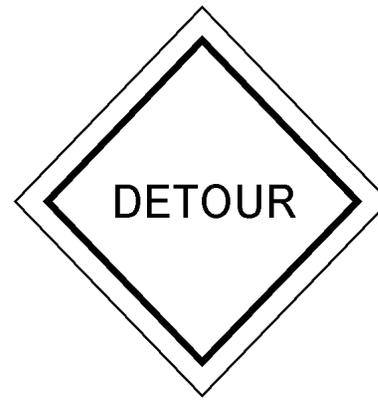

Size: 30"x 30"
Shape: Diamond
Color: Diamond: Orange and Black. Barricade: Red and Silver
Lettering: Minimum 4 inch letters. Standard Alphabet Series C. 1/2 inch Border.
Reflective Background Required
Mounting: Posts or portable sign stands, clearly visible to drivers. Do not mount on trees.

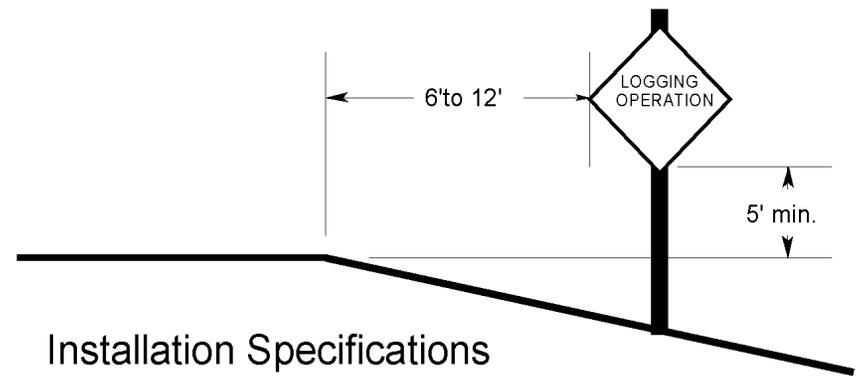


CULVERT REQUIREMENTS

- ▶ Exact locations for pipes shall be determined by the Forest Officer after right of way has been cleared.
- ▶ Backfill shall be select, sorted material. Gravel may be required in road log. If native backfill is used, rocks over 3 inches diameter, organic or frozen materials are not permitted.
- ▶ Pipe shall be protected by adequate fill before equipment is allowed to cross.
- ▶ Pipe that is damaged or improperly installed shall be repaired or replaced at purchaser's expense.
- ▶ The Forest Officer must be contacted two days before any culvert installation and must be present for any wet site culvert installation.
- ▶ Wet site installations will have additional requirements for timing, erosion control and management.


Installation Requirements

All pipes shall be installed with a backhoe or excavator. The excavated trench shall only be wide enough to allow satisfactory joining and thorough compaction of the bedding material around the pipe.

Minimum fill depth over top of pipe on uphill edge of road for pipes less than 36" diameter is 12" or 1/2 pipe diameter, whichever is greater. Minimum fill for larger pipes is 18".

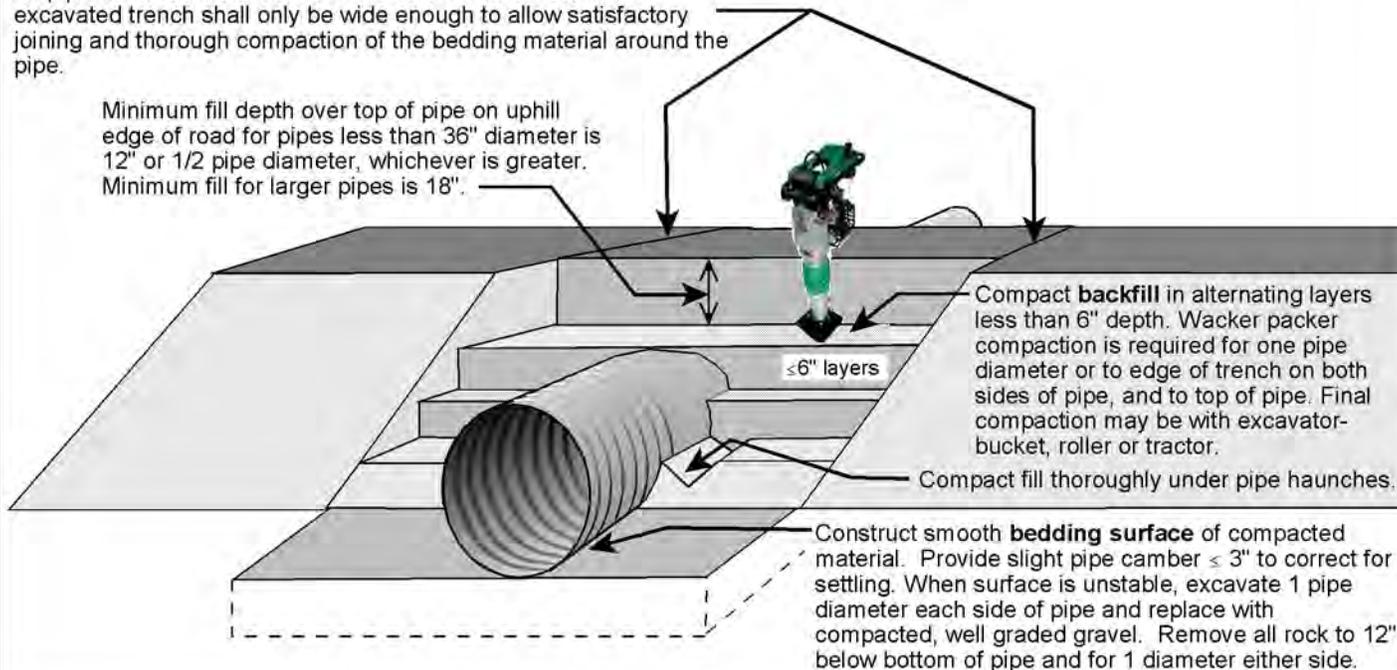

Site Requirements

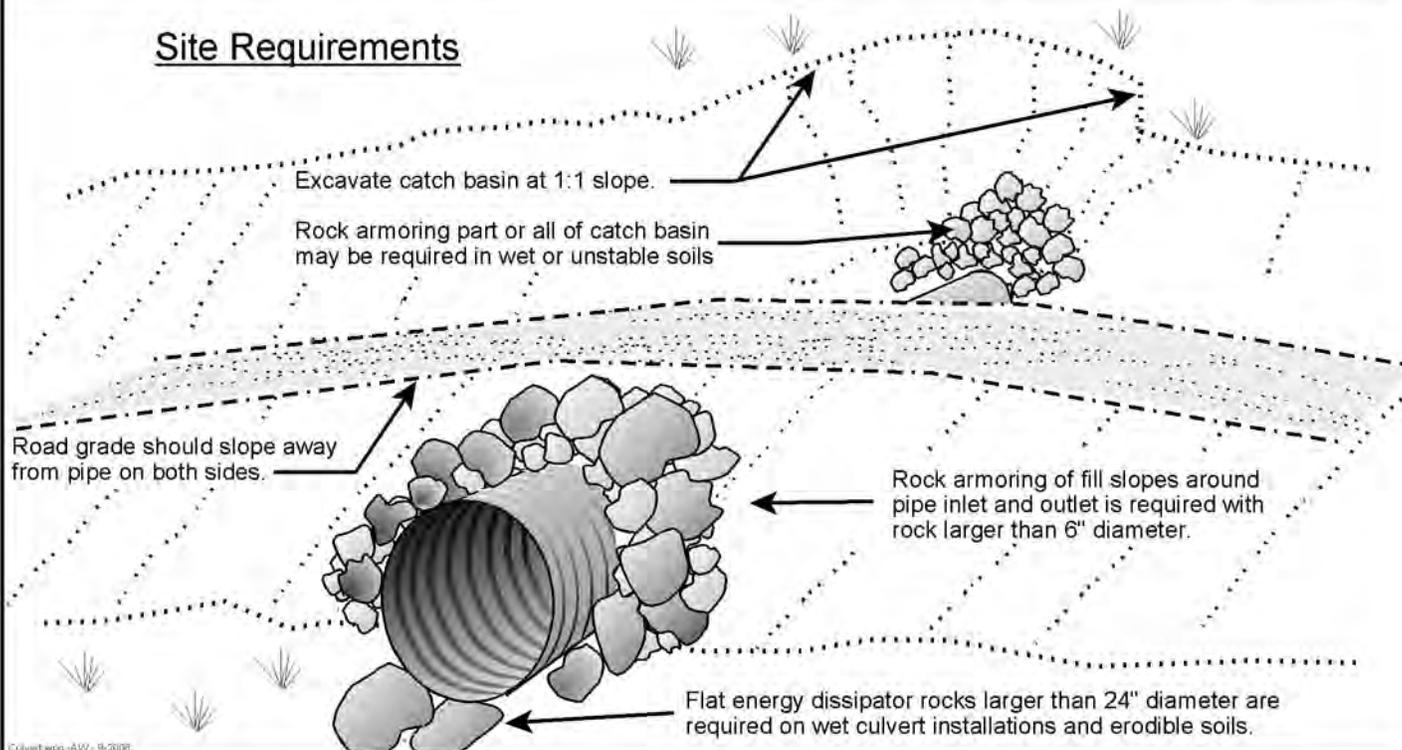

FOREST FIRE RULES & REGULATIONS

These rules apply to all activities on all classified forest lands within Montana during the legal Forest Fire Season, including any extension thereof (see 77-5-103(3), 76-11-101, 76-13-102(7), and 76-13-109 MCA). Reference also ARM 36.10.119 through 132.

Related State statute numbers are provided as a reference.

RULE I - DEBRIS BURNING

1. The person conducting the burn shall obtain written authorization from the recognized fire protection agency before igniting any open fire during the legal forest fire season (required by 76-13-121 MCA). The recognized fire protection agency may deny, restrict, or rescind any authorization by notifying the person conducting the burn.
2. All burning must comply with the Department of Environmental Quality or State/county/local open burning regulations.
3. Written authorization is not required for campfires.

RULE II - CAMPFIRES

1. Campfires cannot be left unattended and must be completely extinguished (see 76-13-123 MCA).
2. All campfires must be constructed in cleared or bare areas, and not allowed to spread beyond the established ring, pit, grate, or container.
3. Anyone igniting a campfire is required to have fire tools listed in Rule VIII (4).

RULE III - RAILROADS AND POWERLINES

Railroad and powerline companies are required to prepare and annually update working agreements with recognized fire protection agencies. These agreements must stress safety and fire response procedures; and identify, remove, prevent, modify, abate, or correct forest fire hazards and risks associated with railroad and powerline company operations (see 69-14-721 MCA).

RULE IV - EQUIPMENT

1. All internal combustion engines must be equipped with an approved and effective spark-arresting system, as established in the National Wildfire Coordinating Group's Spark Arrester Guides. Spark-arresting devices must be marked, properly installed, and maintained in accordance with the Guides. The following vehicles are exempt:
 - a. automobiles and light trucks of less than 23,000 GVW when all exhaust gases pass through a properly installed and maintained exhaust system, baffle-type muffler, and tailpipe. Vehicles with glass-pack mufflers do not qualify for the exemption.
 - b. heavy-duty trucks of 23,000 GVW or greater, with a muffler and vertical stack exhaust system extending

above the cab.

- c. vehicles with other spark-arresting systems providing equal or increased effectiveness. Such vehicles must be inspected and have written authorization from the recognized fire protection agency.
2. Equipment used for commercial, ranching, or industrial activities must meet the fire extinguisher and tool requirements listed in Rule VIII (5).

RULE V - FLAMING AND GLOWING SUBSTANCES

1. All flaming and glowing substances, including but not limited to, lighted cigarettes, cigars, ashes, and matches, must be extinguished before being discarded (see 76-13-124 MCA).
2. Smoking is allowed only at areas free of flammable or combustible material. Examples of these areas include a graveled road or an enclosed vehicle.

RULE VI - FIREWORKS

Use of fireworks is prohibited on all classified forest lands unless written authorization is obtained from the recognized fire protection agency. Authorization will only be considered between June 24 and July 5, inclusive, to coincide with the legal dates for the sale of fireworks in Montana (see 50-37-106 MCA).

RULE VII - WILDLAND/URBAN INTERFACE

1. County governments without subdivision wild-fire protection standards are encouraged to establish standards for all new subdivisions by January 1, 2000.
2. The Fire Protection Guidelines for Wildland/Residential Interface Development (DSL/DOJ, 1993) is available for use to assist counties in the development of standards.

RULE VIII - FIRE EXTINGUISHERS AND FIREFIGHTING TOOLS

1. Chainsaw operators shall carry a fully charged and operable fire extinguisher, minimum-capacity 8-ounce liquid or 1-pound dry chemical, with a 4BC or higher rating.
2. Vehicles and equipment, mobile or stationary, with a combustion engine/motor used for commercial, ranching, or industrial activities must have one operable, dry-chemical fire

extinguisher with a minimum 2-1/2 -pound capacity and 4BC or higher rating.

3. Chainsaw operators shall maintain one usable shovel at chainsaw-fueling sites.
4. All persons or parties igniting a campfire shall have one usable shovel and bucket. Persons igniting a barbecue need not have a shovel or bucket if the ashes are not removed from the container and the ashes or container are not placed on or near combustible material.
5. All commercial, ranching, or industrial activities must have:
 - a. one usable shovel or pulaski with each vehicle and equipment with an internal combustion engine/motor, mobile or stationary.
 - b. one backpack pump with each vehicle and with any equipment, used off road, mobile or stationary, with an internal combustion engine/motor, that cannot be used to build fireline and is being operated on combustible material.
6. Other types of firefighting tools that provide increased efficiency or effectiveness may be substituted by written authorization from the recognized fire-protection agency. For example, a [combi] firefighting tool may be substituted for a shovel or pulaski.

RULE IX - FOREST ACTIVITY RESTRICTIONS

In areas designated by public proclamation by the administrator, division of forestry, as areas of high fire hazard, the administrator may request all persons, firms, or corporations present or engaged in any activity in the areas to voluntarily cease operations or to adjust working hours to less critical periods of the day. In the event such a request is refused, the administrator may issue a written order directing compliance.

RULE X - FOREST CLOSURE

1. During periods of dangerous fire conditions, no person may enter or be upon those forest lands designated by public proclamation by the governor of the state of Montana as areas of dangerous fire hazard except under written permit issued by a recognized agency.
2. Permits to enter upon such areas during the closure may be issued by the recognized agency upon a showing of real need by the applicant. Permits may be issued to those persons having actual residence as a permanent or principal place of abode in the forest lands designated or to persons engaged in non-fire hazardous employment.
3. However, no permit may be required of persons engaged in either firefighting, fire prevention, or law enforcement who are engaged in official business.

RULE XI - CORRECTION OF HAZARD AND UNUSUAL CIRCUMSTANCES OR EVENTS


The recognized fire-protection agency may require identified wildland-fire hazards and/or risks be halted, prevented, abated, removed, disposed of, mitigated, or patrolled. This applies to public, private, nonprofit, commercial, and/or residential circumstances or events.

RULE XII - REQUEST FOR REVIEW

If any operator believes that in his case any requirement of a recognized agency is excessive, the operator may request the administrator, division of forestry, to review the requirements. If in the opinion of the administrator any or all are not necessary in the interest of public safety, he may make such changes as he considers advisable.

RULE XIII - DEFINITIONS

Backpack Pump: 5-gallon minimum; standard galvanized metal, fiberglass, or rubberized backpack water container with attached handpump; full of water at all times.

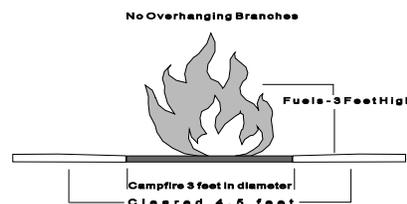

Bucket: Metal, plastic, canvas, or fiberglass container capable of holding at least one gallon of water. Motorcycle helmets qualify. **[Campfire]** means a fire set for cooking, warming, or ceremonial purposes; not more than 3 feet in diameter or height; void of overhanging branches; with all combustible material cleared at least 1-1/2 times the diameter of the fire; or a barbecue in a noncombustible container.

Combi Tool: A tool combining a shovel and pick.

Fireworks: As defined in 50-37-101 MCA.

Forested Land: As defined in 76-13-102 MCA and 36.10.101 ARM.

Hazard: Condition that promotes the ignition and/or spread of a wildland fire.

Open Fire: The burning of a bonfire, rubbish fire, or other fire in an outdoor location where fuel being burned is not contained in a closed incinerator, or outdoor fireplace. Barbecue pits and burn barrels are considered open fires and therefore require a burning permit (Rule I).

Pulaski: An ax with a medium size sharp grub hoe opposite the ax blade.

Recognized Fire-Protection Authority: An agency organized for the purpose of providing fire protection and recognized by the board as giving adequate fire protection to forest lands in accordance with rules adopted by the board.

Risk: Action or device that could cause a wildland fire to ignite.

Shovel: Vehicle, equipment, and chainsaw operator shovels will have a minimum overall length of 36 inches with a round pointed shovel head with a minimum width of 6 inches. Shovels required for campfires must be at least 24-inches in length with a pointed shovel head. Folding handles qualify.

RULE XIV - APPLICABILITY

The forest fire rules, Rule I through Rule XIII, (ARM 36.10.119 through 30.10.132) are in effect each year on classified forest land during the forest fire season May 1st to September 30th inclusive, or any legal extension thereof. Requirements pertaining to motor vehicles do not apply to those being operated solely on roads that are a part of federal or State maintained highway systems or on any paved public road.



WORKING IN BEAR HABITAT



12/03/12

Grizzly bear distribution is expanding in Montana and human/bear encounters are becoming more common. Working in bear habitat increases the likelihood of interactions with bears. It is important for contractors and their employees to be aware of steps that can be taken to minimize conflicts and how to react if an interaction occurs. This pamphlet provides information about bear behavior, preventive measures, and what to do in the event an encounter occurs. *This pamphlet is intended to provide information about possible ways of avoiding encounters with bears. It should not, however, be relied on as the sole means of doing so. In addition to adhering to the guidelines outlined in this document, you should always rely on your experience, training, education and judgment about the best, safest manner to avoid encounters with bears.*

ENCOUNTERS

- ▲ Stay calm and keep the animal in view, but avoid direct eye contact. Bears may interpret eye contact as a sign of aggression. Back away slowly. Never run from a bear unless you know you can reach safety. Determine whether the animal is a black bear or a grizzly bear.
- ▲ If the bear charges, stand your ground. Bears commonly “bluff charge,” stopping within a few feet of a person, before fleeing in a different direction.
- ▲ Keep bear spray handy. Always have a canister of bear spray (at least eight ounces) on your belt. Make sure it is an EPA registered bear spray with 1 to 2% capsaicin and related capsaicinoids, has a spray duration of at least six seconds, and a range of 25 feet. Familiarize yourself with the directions for using the spray. Use it only if confronted by a charging bear. Spray toward the bear, aiming slightly downward.
- ▲ In the event that you have no bear spray, or it was ineffective and the charge is not a bluff, or the bear is exhibiting predatory behavior, you must change your approach. Signs of predatory behavior include: following, showing interest, coming into a tent, and unprovoked attacks. How you respond will depend on the species of bear attacking you. **Black bear and young grizzly attacks:** Always fight back. Jump up and down, wave your arms and yell. Try to look as large as possible. Never play dead – it makes you easier prey. Remember that black bears and small grizzlies can climb trees, so stay on the ground. **Mature grizzly attacks [particularly females with young]:** If a surprise encounter occurs or if bear spray is ineffective, drop to the ground and play dead. Lie on your stomach, clasp your hands behind your neck, and use your elbows and toes to avoid being rolled over. If the bear rolls you over, keep rolling until you land back on your stomach. Remain still and don't struggle or scream. A defensive bear will stop attacking once it feels the threat is gone. Don't move until you are sure the bear has left the area. **If the grizzly is exhibiting predatory behavior or comes into a tent at night, do all you can to escape or fight back.**
- ▲ If an encounter occurs, contact the DNRC forest officer immediately and notify Montana FWP.

JOB SITE PREVENTION

- ▲ Watch for bear signs. Signs include: tracks; droppings; recently overturned rocks or logs; logs torn apart; clawed, bitten or rubbed trees; bear trails; hair on tree bark; fresh diggings; and crushed vegetation. If you observe any of these signs, be aware that a bear may be frequenting the area. If camping, or stopping to eat your lunch, select a different area.
- ▲ When working or walking alone, make noise and carry bear spray. Bears don't like surprises, but will move on if they hear people approaching. Make noise, especially when approaching blind corners, dense shrubs and streams, and when walking into the wind. Maintain regular communication with co-workers.
- ▲ If camping on site, leave coolers, food and beverages inside campers or secured vehicles. If cooking over an open fire, do not discard food or grease in fire pits.
- ▲ Don't leave trash, groceries or animal feed in your vehicle for extended periods. Bears can, and do, pry open car and truck doors and break windows to get at food and other items they associate with food.
- ▲ Bears are attracted to petroleum based products. Keep all fuel and oil canisters in bear resistant containers. Bears have been known to damage hoses, oil filters and foam seats on heavy equipment. Dispose of empty containers promptly.

Revised: 2/16/10 (310 form 270)
Form may be downloaded from:
www.dnrc.mt.gov/permits/default.asp

AGENCY USE ONLY: Application # _____ Date Received _____
Date Accepted _____ / Initials _____ Date Forwarded to DFWP _____

JOINT APPLICATION FOR PROPOSED WORK IN MONTANA'S STREAMS, WETLANDS, FLOODPLAINS, AND OTHER WATER BODIES

Use this form to apply for one or all local, state, or federal permits listed below. "Information for Applicant" includes agency contacts and instructions for completing this application. To avoid delays, submit all required information, including a project site map and drawings. Incomplete applications will result in the delay of the application process. Other laws may apply. It is the applicant's responsibility to obtain all permits and landowner permission, when applicable, before beginning work.

<input checked="" type="checkbox"/>	<u>PERMIT</u>	<u>AGENCY</u>	<u>FEE</u>
	310 Permit	Local Conservation District	No fee
X	SPA 124 Permit	Department of Fish, Wildlife and Parks	No fee
	Floodplain Permit	Local Floodplain Administrator	Varies by city/county (\$25 - \$500+)
	Section 404 Permit, Section 10 Permit	U. S. Army Corps of Engineers	Varies (\$0 - \$100)
X	318 Authorization 401 Certification	Department of Environmental Quality	\$250 (318); \$400 - \$20,000 (401)
	Navigable Rivers Land Use License or Easement	Department of Natural Resources and Conservation, Trust Lands Management Division	License \$25; Easement \$50, plus annual fee

A. APPLICANT INFORMATION

NAME OF **APPLICANT**: Montana DNRC Swan Unit—Karen Goode, Management Forester

Has the landowner consented to this project? Yes No

Mailing Address: 34925 Hwy 83 South Day Phone: 406-754-2301

Physical Address: same Evening phone: _____

City/State/Zip: Swan Lake, MT 59911 E-Mail: kgoode@mt.gov

NAME OF **LANDOWNER** (if different from applicant): _____

Mailing Address: _____ Day Phone: _____

Physical Address: _____ Evening Phone: _____

City/State/Zip: _____ E-Mail: _____

NAME OF **CONTRACTOR/AGENT** (if one is used): _____

Mailing Address: _____ Day Phone: _____

Physical Address: _____ Evening Phone: _____

City/State/Zip: _____ E-Mail: _____

B. PROJECT SITE INFORMATION

NAME OF **STREAM** or **WATER BODY** at project location unnamed tribs to Cilly Creek

Nearest Town Swan Lake, MT Address/Location: NA Geocode (if available): _____

 1/4 1/4 1/4, Section 16 & 21, Township 24N, Range 17W County Lake

Longitude _____, Latitude _____

The state owns the beds of certain state navigable waterways. Is this a state navigable waterway? Yes or **No**.
If yes, send copy of this application to appropriate DNRC land office – see Information for Applicant.

ATTACH A PROJECT SITE MAP OR A SKETCH that includes: 1) the water body where the project will take place, roads, tributaries, landmarks; 2) a circled "X" representing the exact project location. IF NOT CLEARLY STATED ON THE MAP OR SKETCH, **PROVIDE WRITTEN DIRECTIONS TO THE SITE.**

This space is for all Department of Transportation and SPA 124 permits (government projects).

Project Name Cilly Graves Timber Sale

Control Number _____ Contract letting date September 30, 2016

MEPA/NEPA Compliance Yes No If yes, #14 of this application does not apply.

C. PROJECT INFORMATION

1. **TYPE OF PROJECT** (check all that apply)

- | | | |
|--|---|--|
| <input checked="" type="checkbox"/> Bridge/Culvert/Ford Construction | <input type="checkbox"/> Fish Habitat | <input type="checkbox"/> Mining |
| X Bridge/Culvert/Ford Removal | <input type="checkbox"/> Recreation (docks, marinas, etc.) | <input type="checkbox"/> Dredging |
| <input type="checkbox"/> Road Construction/Maintenance | <input type="checkbox"/> New Residential Structure | <input type="checkbox"/> Core Drill |
| <input type="checkbox"/> Bank Stabilization/Alteration | <input type="checkbox"/> Manufactured Home | <input type="checkbox"/> Placement of Fill |
| <input type="checkbox"/> Flood Protection | <input checked="" type="checkbox"/> Improvement to Existing Structure | <input type="checkbox"/> Diversion Dam |
| <input type="checkbox"/> Channel Alteration | <input type="checkbox"/> Commercial Structure | <input type="checkbox"/> Utilities |
| <input type="checkbox"/> Irrigation Structure | <input type="checkbox"/> Wetland Alteration | <input type="checkbox"/> Pond |
| <input type="checkbox"/> Water Well/Cistern | <input type="checkbox"/> Temporary Construction Access | <input type="checkbox"/> Debris Removal |
| <input type="checkbox"/> Excavation/Pit | <input type="checkbox"/> Other _____ | |

2. **PLAN OR DRAWING** of the proposed project **MUST** be attached. **This plan or drawing must include:**

- a plan view (looking at the project from above)
- dimensions of the project (height, width, depth in feet)
- location of storage or stockpile materials
- drainage facilities
- an arrow indicating north
- a cross section or profile view
- an elevation view
- dimensions and location of fill or excavation sites
- location of existing or proposed structures, such as buildings, utilities, roads, or bridges

3. **IS THIS APPLICATION FOR** an annual maintenance permit? Yes No
(If yes, an annual plan of operation must be attached to this application – see “Information for Applicant”)

4. **PROPOSED CONSTRUCTION DATE.** Include a project timeline. Start date 09 / 15 / 2016
Finish date 09 / 15 / 2018 Is any portion of the work already completed? Yes No
(If yes, describe the completed work.)

5. **WHAT IS THE PURPOSE** of the proposed project?
To access timber sale units, DNRC needs to implement some road construction and improvements. A total of 3 individual sites are included in this permit application:
Site 1: Graves Spur station 21+33
Site 2: Wetland Spur station 34+15
Site 3: Cilly Creek Rd. MP 1.43

6. **WHAT IS THE CURRENT CONDITION** of the proposed project site? Include a description of the existing vegetation, bank condition, bank slope, and height. What other structures are nearby?
Site 1: Graves Spur station 21+33..... undeveloped site, forbs and shrubs with a conifer overstory.
Site 2: Wetland Spur station 34+15..... undeveloped site, forbs and shrubs with a conifer overstory.
Site 3: Cilly Creek Rd. MP 1.43 existing 12” CMP, pipe length too short, diameter too small, inlet/outlet overgrown; crossing site lacking BMPs.

7. **PROVIDE A BRIEF DESCRIPTION** of the proposed project.
Site 1: Graves Spur station 21+33.....install a 30”x 34’ CMP; Construct roll over pipe to direct surface drainage away from stream channel.
Site 2: Wetland Spur station 34+15..... install a 30”x40’ CMP; Construct roll over pipe to direct surface drainage away from the stream. Rock armor inlet/outlet.
Site 3: Cilly Creek Rd. MP 1.43 Remove existing 12”x 36’ CMP. Install 24”x 40’ CMP on a 40% skew. Rock armor outlet with energy dissipaters.

8. **PROJECT DIMENSIONS.** How many linear feet of bank will be impacted? How far will the proposed project encroach into and extend away from the water body?

Site 1: Graves Spur station 21+33.....up to 6' of bank on each side of the CMP may be affected.

Site 2: Wetland Spur station 34+15.....up to 10' of bank on each side of the CMP may be affected.

Site 3: Cilly Creek Rd. MP 1.43.....Approximately 4' on each bank would potentially be disturbed.

9. VEGETATION. What type and how much vegetation will be removed or covered with fill material?

Site 1: Graves Spur station 21+33.....New road fill would be placed up to and over the new CMP. Road would be 14 feet wide and cover existing forbs and small shrubs.

Site 2: Wetland Spur station 34+15.....New road fill would be placed up to and over the new CMP. Road would be 14 feet wide and cover existing forbs and small shrubs.

Site 3: Cilly Creek Rd. MP 1.43Existing road material would be excavated to remove existing pipe. The original road material would be replaced over the new CMP.

10. MATERIALS. Describe the materials to be used and how much.

Cubic yards/Linear feet

Size and Type

Source

See attached Road Log Appraisal.

11. EQUIPMENT. What equipment is proposed to be used for the work? Where and how will the equipment be used on the stream bank and/or the waterbody?

Site 1: Graves Spur station 21+33.....excavators, dump truck and hand work.

Site 2: Wetland Spur station 34+15.....excavators, dump truck and hand work.

Site 3: Cilly Creek Rd. MP 1.43.....excavators, dump truck and hand work.

12. CONSIDER THE IMPACTS OF THE PROPOSED PROJECT, EVEN IF TEMPORARY. Describe planned efforts during and after construction to:

- Minimize erosion, sedimentation, or turbidity?
On all sites, the work will be completed during low flow or no-flow period. Temporary erosion control measures would be installed as needed to minimize the potential for sediment delivery. All disturbed areas will be seeded immediately after completion.
- Minimize stream channel alterations?
Site 1: Graves Spur station 21+33.....slash filters will be placed along the toe of the fill at the CMP crossing site.
Site 2: Wetland Spur station 34+15.....rock armoring will be placed at the inlet and outlet.
Site 3: Cilly Creek Rd. MP 1.43.....existing CMP will be replaced with a larger diameter CMP which will be placed in the same location.
- Minimize effects to stream flow or water quality caused by materials used or removal of ground cover?
Ground covering vegetation removal will be minimized as much as feasible. Area will be grass seeded and have erosion control measures installed as needed (slash filter, silt fence or wattles) to help minimize erosion, and sediment delivery to the stream.
- Minimize effects on fish and aquatic habitat?
Activities will be done during low flow or no flow period; duration of activities will be minimized.
- Minimize risks of flooding or erosion problems upstream and downstream?
Crossing structures are properly sized to minimize the potential for flooding.

- Revegetate/protect existing vegetation and control weeds?

Area will be grass seeded on the disturbed area to help minimize erosion and reduce to available space for weeds. All seed will be certified noxious weed free (blue tagged).

13. **WHAT ARE THE NATURAL RESOURCE BENEFITS** of the proposed project?

14. **LIST ALTERNATIVES** to the proposed project. Why was the proposed alternative selected?

D. ADDITIONAL INFORMATION FOR SECTION 404, SECTION 10, AND FLOODPLAIN PERMITS. If applying for a Section 404 or Section 10 permit, fill out questions 1-3. If applying for a floodplain permit, fill out questions 3-6. (Additional information is required for floodplain permits – See “Information for Applicant.”)

1. Will the project involve placement of fill material in a wetland? If yes, describe. How much wetland area will be filled? Calculate the area impacted by fill activity or other disturbance. Note: A delineation of the wetland may be required.
2. If there is a plan for compensatory mitigation, describe the location, type, and amount of proposed mitigation. Attach additional sheet if necessary.
3. List the names and address of landowners adjacent to the project site. This includes properties adjacent to and across from the project site. (Some floodplain communities require certified adjoining landowner lists).

4. List all applicable local, state, and federal permits and indicate whether they were issued, waived, denied, or pending. Note: All required local, state, and federal permits, or proof of waiver must be issued prior to the issuance of a floodplain permit.
5. Floodplain Map Number _____
6. Does this project comply with local planning or zoning regulations? Yes No

E. SIGNATURES/AUTHORIZATIONS

Each agency must have original signatures signed in blue ink.

After completing the form, make the required number of copies and **then sign each copy**. Send the copies with original signatures and additional information required directly to each applicable agency.

The statements contained in this application are true and correct. I possess the authority to undertake the work described herein or I am acting as the duly authorized agent of the landowner. I authorize inspection of the project site after notice by inspection authorities.

APPLICANT:

Print Name: _____

LANDOWNER:

Print Name: _____

Signature of Applicant Date

Signature of Landowner Date


*CONTRACTOR/AGENT:

Print Name: _____


Signature of Contractor/Agent Date

*Contact agency to determine if contractor signature is required.

**Cilly Graves Timber Sale
124 Permit Application
Sections 16 and 21 T24N R17W**

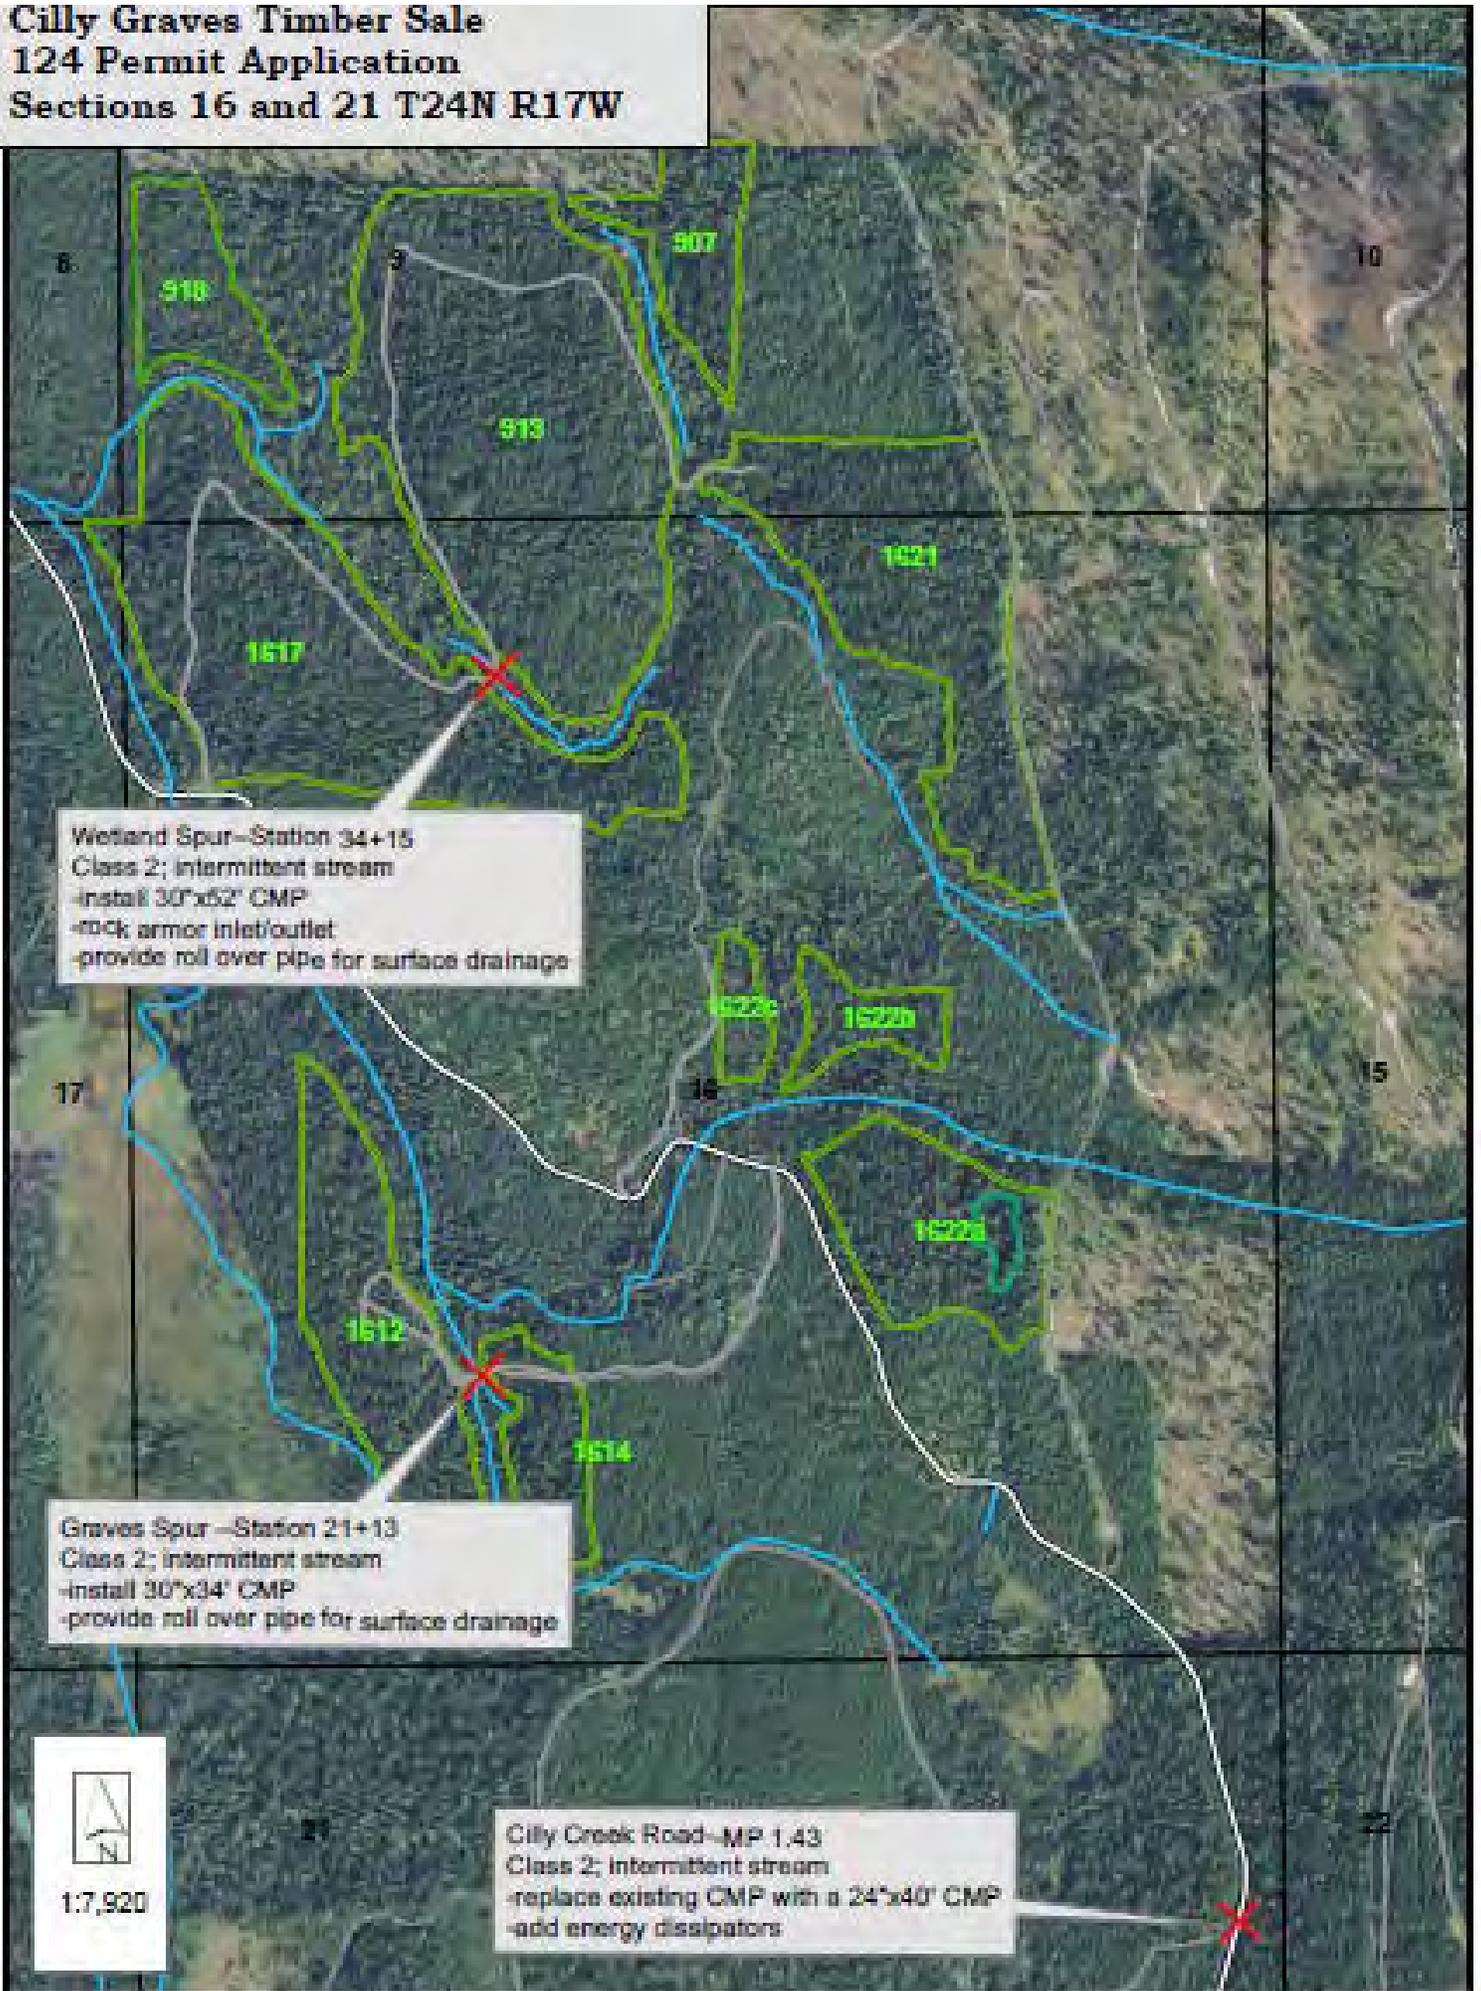

TYPICAL STREAM CROSSING OR WET SITE CULVERT INSTALLATION

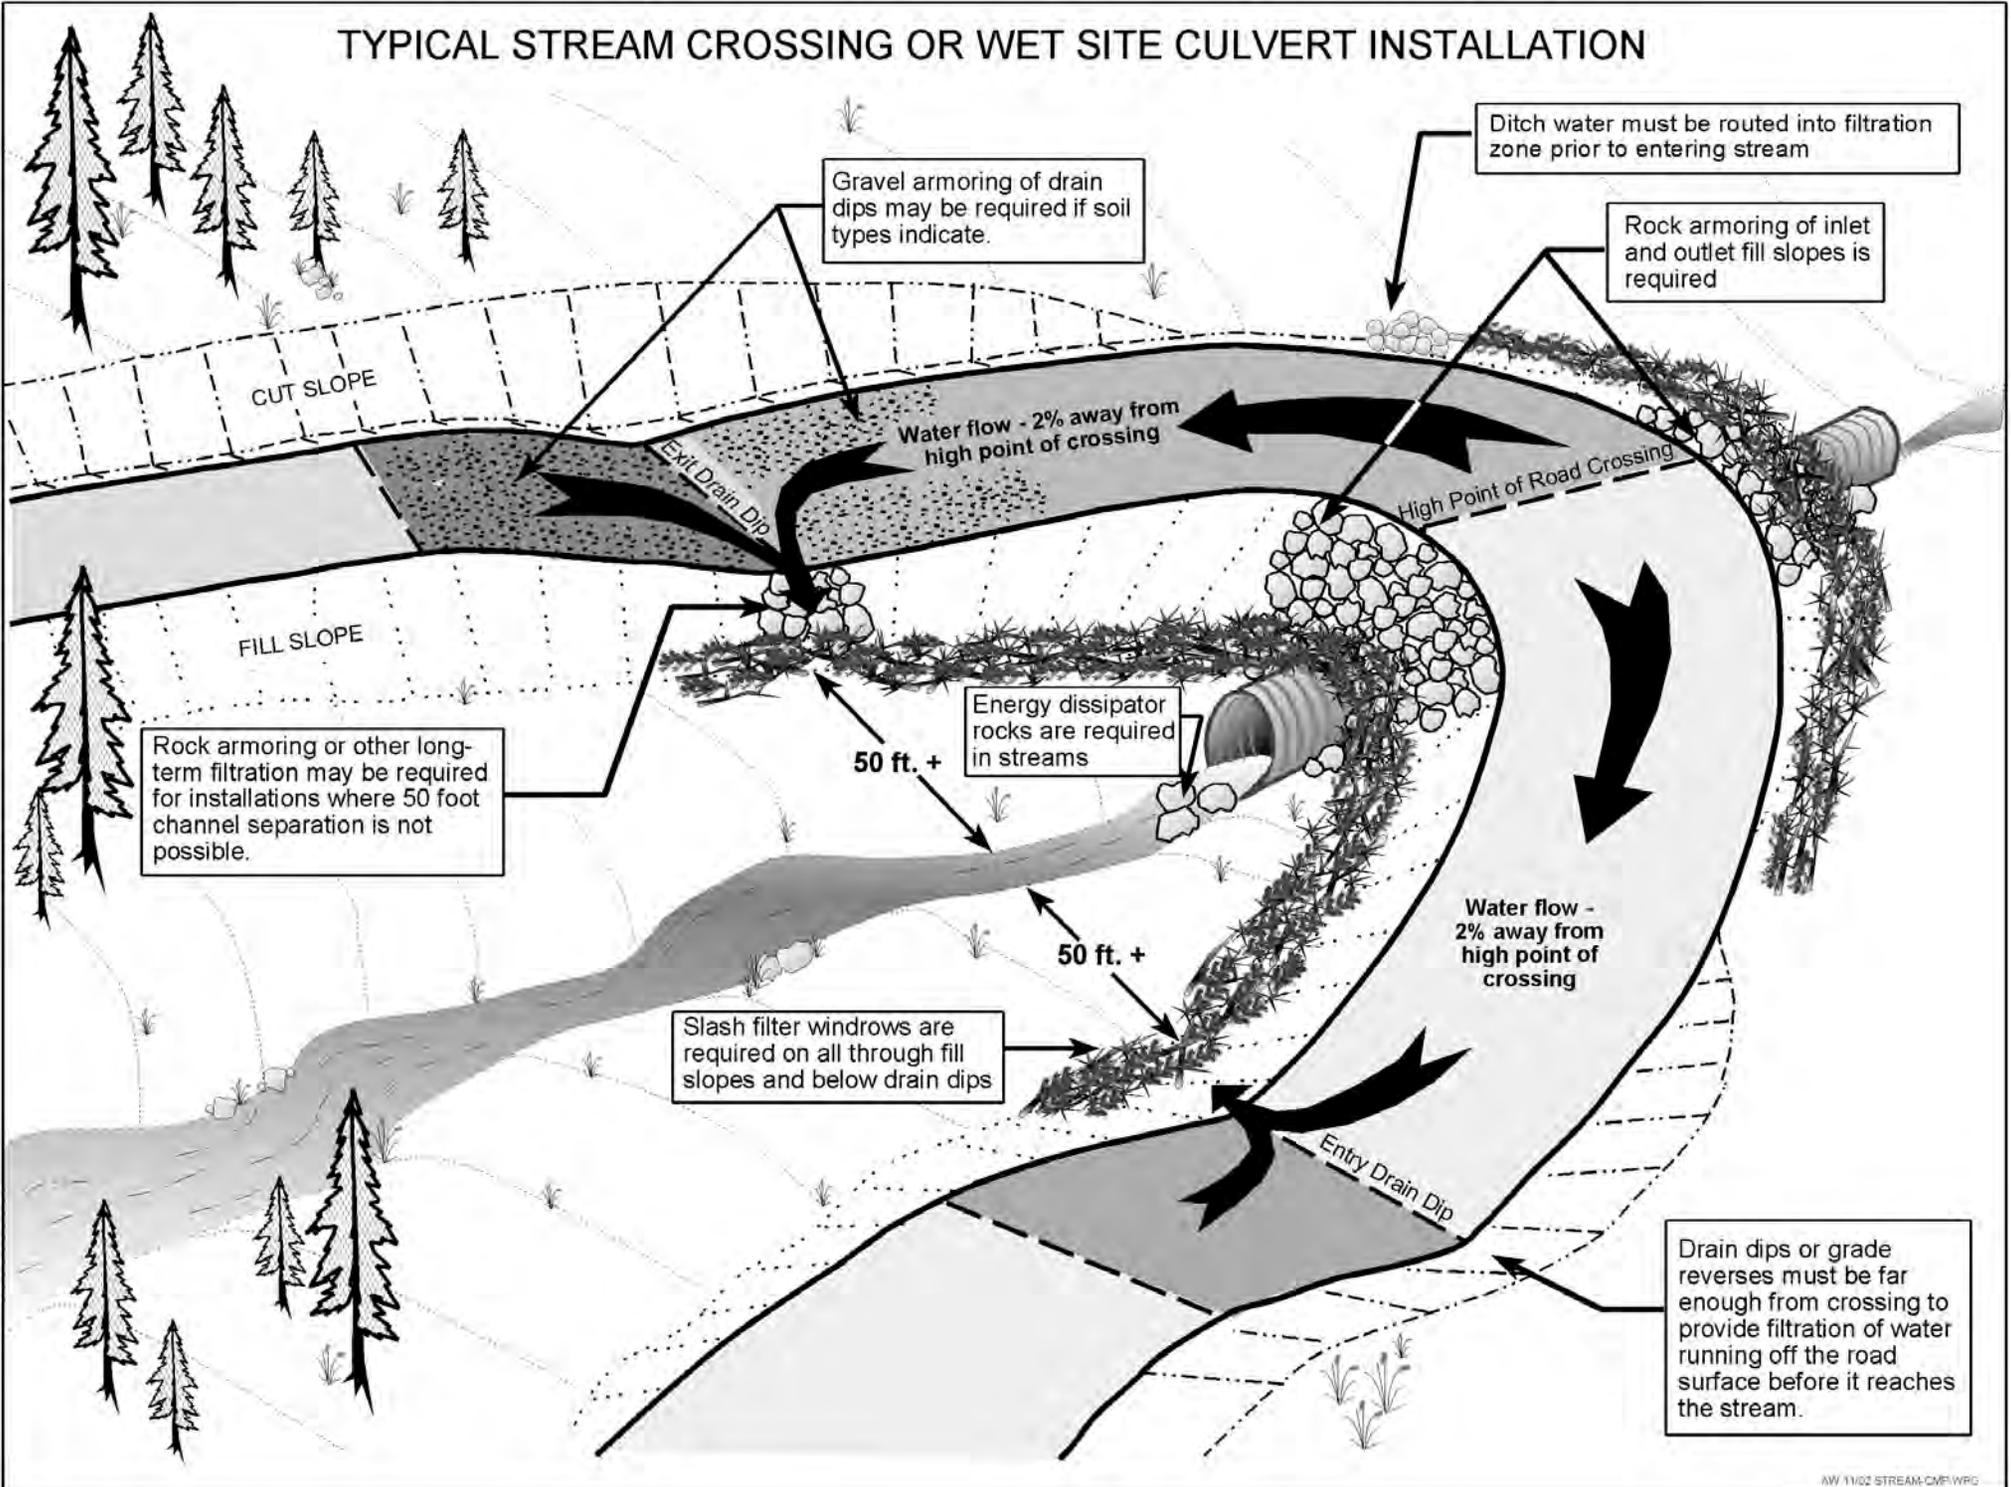

Graves Spur Road Log - New Construction					
18+01	Begin new road construction of a 14-foot wide road. Grass seed road upon completion of construction.	construction		14.60	stations
20+81	West boundary for unit 16-14. Entering SMZ. Start gravel lift. Place 60 cu. yds. of pit run over 110 feet.	gravel	pit run	60.00	cu. yds.
21+33	Install 30" x 34' CMP on Class 2 stream. Place 10 cu.yds. of 1 1/2"-minus over CMP. Slash filter at toe of fill. Grass seed site.	earthwork		2.00	hours
		CMP	30"	34.00	feet
		gravel	1-1/2 inch	10.00	cu. yds.
		grass seed	quick cover	0.05	acres
21+91	End gravel lift. Boundary for unit 16-12. Leaving SMZ.				
22+34	Build wide corner for log haul. Begin cut/fill for a 14-foot road with an inside ditch.				
22+96	Construct drain dip with ditch intercept and lead out to right.	drain dip		1.00	each
		earthwork		2.00	hours
23+68	+6% grade. Begin no side casting into SMZ. Slash filter windrow may be required at time of construction.				
24+37	+6% grade				
25+07	+4.5% grade				
25+73	Grade break - 0%				
26+58	+10% grade				
27+48	+3% grade				
27+67	+2% grade. End no side casting into SMZ.				
28+64	+5% Edge of unit boundary (right).				
29+33	+5%				
29+97	+5%				
30+66	+5%				
31+63	+3%				
32+64	EOP. Build landing/turn around.				

<u>Wetland Spur</u>					
	New road construction for Wetland Spur begins at the junction with Cilly Creek Road (MP 2.9). The road will be native surface and a minimum of 14 feet wide. Surface drainage will consist of rolling drain dips and grade reversals. Install drain dips approximately every 500 feet. Turnouts will be intervisible or at least every 0.25 miles. The road location is identified as a centerline marked with pink fluorescent flagging and clearing limits are marked with yellow ribbon and paint facing the centerline. Overall requirements for this road are as follows: - New construction, maintenance, and repair: 7,835 feet or 1.48 miles				
<u>Wetland Spur</u>					
0+00	Junction with Cilly Creek Road. Begin new construction. Install gate. Unmarked SMZ on left - no side casting. Initial grass seeding to be completed upon completion of construction.	construction		78.40	stations
		earthwork		1.00	hours
		gate		1.00	each
1+80	+3%				
4+80	0%. Install drain dip between this station and the next station.	earthwork		1.00	hours
		drain dip		1.00	each
5+48	+8% - slight turn to right.				
6+14	+5% - cornering right				
6+48	Cornering left. Starting into draw crossing.				
6+79	Draw crossing. Install 18"x32' CMP. Spread approx. 4' of fill with 110 cu. yds. of pit run. Cap with 30 cu. yds. of 1 1/2"-minus over CMP. Grass seed site.	earthwork		1.00	hours
		CMP	18"	32.00	feet
		gravel	1-1/2 inch	30.00	cu. yds.
		gravel	pit run	110.00	cu. yds.
		grass seed	quick cover	0.05	acres
7+05	Begin full bench construction for approximately 100 feet.				
7+39	+12%				
8+01	0%. End full bench construction.				
10+17	0%. Install drain dip between this station and the next station.	earthwork		1.00	hours

		drain dip		1.00	each
10+82	+5%				
12+89	+8%				
14+27	+5%. Section line between 9 & 16.				
14+83	+5%. Install drain dip.	earthwork		1.00	hours
		drain dip		1.00	each
15+89	0%. Cornering to right.				
16+40	+8%				
16+81	-5%				
17+42	+5%				
18+60	0%. Grade break.				
19+13	0%. Grade break				
19+77	-2%				
22+29	0%				
29+76	-5%				
31+16	-2%				
31+43	-4% Begin fill using material available between stations 31+43 through 32+73.				
31+86	-4% Dry draw				
32+29	-23% End fill.				
33+23	+6% Entering SMZ - boundary.				
33+58	0%				
33+97	-22% Dropping into creek crossing. Begin fill using material available on site or place 200 cu. yds. of pit run at a depth of 6 feet over 66 feet. Place a gravel cap over the pit run with 20 cu. yds. of 1 1/2"-minus.	gravel	1-1/2 inch	20.00	cu. yds.
		gravel	pit run	200.00	cu. yds.
34+15	Install 30"x40' CMP. Place 10 cu. yds. of rock armor at the inlet/outlet.	earthwork		3.00	hours

		CMP	30"	40.00	feet
		rock armor		10.00	cu. yds.
		grass seed	quick cover	0.05	acres
34+63	+15% End fill.				
34+81	+15%				

<u>Cilly Creek Road</u>					
	Road maintenance begins at the Soup Creek road junction (approx. 3.8 miles on the Soup Creek Road). This road has a native material surface. The driving surface is approximately 16 feet wide. Overall requirements for this road are as follows: - Maintenance and repair as directed by the Forest Officer: 3.2 miles.				
<u>Cilly Creek Road</u>					
0.00	Begin maintenance as directed by the Forest Officer. Work includes: blading, CMP work, and weed spraying. Initial weed spraying to occur in the spring of 2017. Final weed spraying to occur post harvest. Intermediate and final blading to occur, as needed. The Cilly Creek Road is part of haul route for Cub Scout, Cilly Excaline, and Cilly North Soup.				
1.43	Remove existing 12" CMP on a Class 2 stream. Install 24" x 40' CMP on a 40% skew. Place 10 cu. Yds. of 1 1/2"-minus gravel over CMP. Grass seed site.	earthwork		2.00	hours
		CMP	24"	40.00	feet
		gravel	1-1/2 inch	10.00	cu. yds.
		grass seed	quick cover	0.05	acres
1.46	Existing CMP. No work needed				
1.60	Existing CMP. End of Cub Scout road maintenance requirements.				
1.70	Junction with Lower Cilly Road (right). End of Cilly Excaline road maintenance requirements.				

**Montana Department of Natural Resources and Conservation
Downed Woody Debris Computation Form**

Area/Unit: _____ Project Name: _____ Unit #: _____

Transect Number	Sound Logs			Rotten Logs			Total Weight
	Size (dia)	# Logs	Weight (tons)	Size (dia)	# Logs	Weight (tons)	

(Total Sound Log Weight + Total Rotten Log Weight) / Number of Transects = Tons/acre of woody debris

The following is an example of how the form is filled out and will be used to calculate tons/acre using the 50 foot transect tables:

Area/Unit: Swan Project Name: Ton Example Unit #: 1

Transect Number	Sound Logs			Rotten Logs			Total Weight
	Size (dia)	# Logs	Weight (tons)	Size (dia)	# Logs	Weight (tons)	
1	3"	2	1.7	6"	3	7.5	9.2
	10"	1	9.3				9.3
2	4"	1	1.5	5"	4	7.0	8.5

Calculation:

((1.7+9.3+1.5) + (7.5+7.0)) / 2 transects = 13.5 tons/acre for Ton Example Unit #1

Attachment **G**

SCARIFICATION TRANSECT PROCEDURE

2/4/2014

Using a 100 foot tape:

1. Select a starting point at least 20 feet from any road.
2. Randomly select a compass bearing that will give you a line somewhat perpendicular to contours or perpendicular to the line of equipment operation.
3. Stretch out the 100 foot tape along the compass bearing.
4. Starting with the 100 foot mark determine the level of scarification at each foot mark and dot tally in the table below.
5. At the end of the tape, do not record data for the last or zero end of the tape.
6. Count the dot tally in the scarified column which will give the percentage directly.

Using a 300 foot tape:

Follow steps 1 through 3 for the 100 foot tape (above), then:

4. Starting with the 300 foot mark determine the level of scarification at each three foot mark and dot tally in the table below.
5. At the end of the tape, do not record data for the last or zero end of the tape. The total dot tally should have 100 dots.
6. Count the dot tally in the scarified column which will give the percentage directly.

Scarified	Not Scarified	Puddled

Number of Dots _____ _____ _____

Definitions:

Scarified Duff removed to bare mineral soil.

Not scarified Duff in place on the mineral soil, mineral soil not showing.

Puddled Mineral soil showing on top of a layer of duff. Not a good seed bed for germination and growth of seedlings.

Attachment H: Piling and Scarification Requirements

DESCRIPTION:

The project consists of using an excavator to pile and/or trample logging slash, in conjunction with scarification to facilitate natural and planted regeneration in harvest units.

The estimated acreage to be piled and scarified is 221 acres. Slopes range from 10% up to 50%.

Piling is expected, but some of the hazard reduction needs will be achieved through trampling and spreading slash. Ten to fifteen tons of down woody debris, comprised of material 3 inches dbh and greater, will be retained as measured by the protocol shown in Attachment F.

Scarification will consist of exposing mineral soil on 30 to 35% of the area treated as determined by the protocol shown in Attachment G.

REQUIREMENTS:

1. **Excavator Requirements**- Work will be done with an excavator no larger than a 161 horsepower with a ground pressure of 9.4 PSI or less and equipped with:
 - a. Bucket and thumb, clamshell, double rake head, or a masticating/grinding head w/thumb
 - b. Roll Over Protective Structure (ROPS) and Falling Object Protective Structure (FOPS)
 - c. Grousers
 - d. Approved, serviceable spark arrester
 - e. Fire extinguisher (dry chemical type 2.5 lb. min)
 - f. Shovel and pulaski
2. Prior to operation, the Purchaser and the Forest Officer will visit the harvest unit to be treated and agree on piling and site-preparation needs.
3. Prior to operation, slash will be on the ground for a year or as approved by the Forest Officer.
4. The Purchaser will supply qualified equipment operator(s) at all times.
5. The Forest Officer may temporarily suspend operations under weather conditions unsuitable for continuing work; the period of such suspension shall not be deemed a breach of the terms of this Agreement.
6. The Purchaser will leave 10 to 15 tons per acre of slash that is 3 inches or larger in diameter as per Attachment E.
7. All piles will be clean, 6 feet or greater in height and compacted with piling equipment to a sufficient degree to allow complete burning.
8. Piles will **not** be constructed within 20 feet of residual trees or beneath any portion of the crown of a residual tree. If spacing of residual trees makes this impractical, piles will be constructed in the largest openings available.
9. Where site preparation is specified by the Forest Officer, the Purchaser will expose bare mineral soil on 30 to 35 percent of the area.
10. Operations will be conducted only under relatively dry soil-moisture conditions (20 percent or less soil moisture).

11. The Purchaser will scrupulously avoid damaging residual trees and displacing soil during piling operations.
12. The Purchaser shall repair all existing facilities, such as, but not limited to, roads, erosion dips, barriers, drainage facilities, and fences, if damaged or removed by the Purchaser.
13. The Purchaser will **not** operate equipment in or across live streams, stream channels, or within Streamside Management Zones (SMZs).
14. The Purchaser will leave standing all broken trees that are greater than 8 inches dbh.
15. Patches of regeneration and hardwoods (e.g. aspen, birch, cottonwood) within unit boundaries will be left, except as directed by the Forest Officer.
16. The Purchaser will pile live brush and unhealthy residual trees, as directed by the Forest Officer.
17. The Purchaser will construct minor road or skid trail drainage and road closure features as directed by the Forest Officer.