Processing Materials

- Work copies of applicant-submitted information
- Deficiency letter
- Deficiency response
- Correct & complete determination
- Any correspondence with the applicant after application receipt and prior to sending the Draft PD

Processing Materials

THE MONTANA DEPARTMENT OF NATURAL RESOURCES AND CONSERVATION

GOVERNOR GREG GIANFORTE



DNRC DIRECTOR AMANDA KASTER

Water Resources Division – Kalispell Regional Office 655 Timberwolf Pkwy, Ste. 4 Kalispell, MT 59901-1215 (406) 752-2288 DNRCKalispellWater@mt.gov

October 17, 2025

SALISH SHORES UTILITY CORP INC PO BOX 1030 THOMPSON FALLS MT 59873-1030

Subject: Correct and Complete Application for Beneficial Water Use Permit Application No. 76N 30165123

Dear Applicant,

The Department of Natural Resources and Conservation (Department) has determined that your application is correct and complete pursuant to Administrative Rules of Montana 36.12.1601. Please remember that correct and complete **does not mean that your application will be granted**. The purpose of this letter is to indicate that the Department has enough information to analyze your water right application.

The Department will issue a Draft Preliminary Determination within 60 days of the date of this letter per §85-2-307(2)(b), Montana Code Annotated (MCA).

Following issuance of the Draft Preliminary Determination, you (Applicant) will have 15 business days to request an extension of time to submit additional information, if desired pursuant to §85-2-307(3)(a), MCA.

If no extension of time is requested and the Draft Preliminary Determination decision is to grant your application or grant your application in modified form, the Department will prepare a notice of opportunity to provide public comment, per §85-2-307(4)(a), MCA.

If no extension of time is requested and the Draft Preliminary Determination decision is to deny your application, the Department will adopt the Draft Preliminary Determination as the final determination per §85-2-307(3)(d)(ii), MCA.

Please contact me at (406) 752-2746 or Travis.Wilson@mt.gov if you have any questions.

Sincerely,

Travis Wilson

Tie Wile

Water Resource Specialist

Kalispell Regional Water Resources Office

Cc via email: Bryan Gartland, Aspect Consulting

RECEIVED 18 SEP 2025 DNRC KALISPELL WATER RESOURCES

MEMORANDUM

To: Travis Wilson, Water Resource Specialist, DNRC Kalispell Regional Office

From: Salish Shores Utility Corp, Inc.

Date: 9/18/2025

RE: Salish Shores Deficiency Response (Change Application No. 76N 30165132)

Salish Shores Utility Corp, Inc. (Salish Shores) presents this response to the August 18, 2025 Deficiency Letter for Change Application No. 76N 30165132. The responses and question numbers correlate to DNRC Form 606 (revised 2/2025).

Question 16

The application, as filed on July 28, 2025, included the response excerpted below for Question 16, indicating that a point of diversion and place of use change is proposed for all four subject water right permits. It appears that a glitch occurred during electronic filing and check boxes were inexplicably left blank under Permit No. 76N 97278-00.

16. Identify the water right elements proposed for change, with a checkmark, for each water right proposed for change.

Water Right No.	76N 30016270	76N 97278-00	76N 85780-00	76N 81519-00	
Point of Diversion	V	V	V	V	
Place of Use	V	V	✓	V	
Purpose of Use					
Place of Storage					

Question 19.a

The point of diversion (POD) location DNRC identified in the March 20, 2025 Technical Analysis (**NENWNW Sec 15, T21N, R29W**) more accurately describes the location of the proposed POD. Please replace the location provided in the July 28 application with this information.

Questions 37 and 37.a

The Applicant (Salish Shores) has possessory interest in the land where all proposed PODs are located. Leufkens Family LLC and Salish Shores are listed as separate entities in Montana Cadastral records, but the management and ownership are one and the same as documented in the Cadastral and Montana Secretary of State records presented below and the attached statement from Todd Wakefield (Managing Partner, Salish Shores and Leufkens Family LLC).

Montana Cadastral¹


Salish Shores Wells 1 and 2 wellhouse location:

Property 36 W STEAM BOAT WAY THOMPSON FALLS, MT 59873

Address:

Geocode: 35-3091-16-4-01-95-0000

Tax Year: 2025

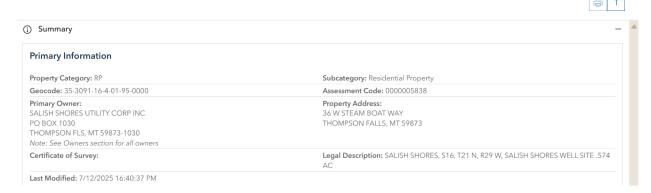


Salish Shores Well 8 location:

Property 2413 MAIN ST E THOMPSON FALLS, MT 59873

Address:

Geocode: 35-3091-15-2-01-06-0000

Tax Year: 2025

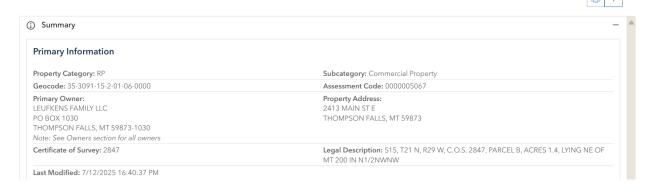

¹ Montana Cadastral (information as of 8/27/2025)

Montana Secretary of State Business Search²

Salish Shores Utility Corp, Inc. (D074115):

SALISH SHORES UTILITY CORP., INC. (D074115) Filing Number D074115 Entity Type **Domestic Profit** Corporation Close Corporation that operates with directors Entity SubType **Active-Good Standing** Status Formed In Montana 2806 Tradewinds Way Thompson Fls, MT 59873 Principal Address PO BOX 1030 THOMPSON FLS, MT 59873-1030 Mailing Address Registration Date 07/20/1992 AR Due Date 04/15/2026 Noncommercial RA1259950 Sue Whittenburg 211 W HALEY AVE THOMPSON FALLS, MT Registered Agent 59873

Leufkens Falily, LLC (C1082664):

Leufkens Family, LLC (C1082664) Domestic Limited Liability Company					
Filing Number	C1082664				
Entity Type	Domestic Limited Liability Company				
Entity SubType	Limited Liability Company				
Status	Active-Good Standing				
Managed By	Member				
Formed In	Montana				
Principal Address	2806 TRADEWINDS WAY THOMPSON FALLS, MT 59873				
Mailing Address	PO BOX 1030 THOMPSON FLS, MT 59873- 1030				
Registration Date	05/21/2018				
AR Due Date	04/15/2026				
Registered Agent	Noncommercial RA1247118 Sue Whittenburg 211 W HALEY AVE THOMPSON FALLS, MT 59873				

² Search | Official Montana Secretary of State (information as of 8/27/2025)

Questions 39.b, 39.c, and 39.d

Please see the attached well logs for all existing and proposed wells, which provide the driller names and their license numbers. All wells associated with the Salish Shores system have been completed and are detailed in the attached documentation.

Question 40.b

Water use standards for municipal water rights are not established in administrative rule (ARM 36.12.115). The sub-types of beneficial uses associated with municipal rights are diverse, dependent on the site-specific characteristics of a project, and greatly influence the quantities of water used. Since the Salish Shores Utility Corp, Inc. (Salish Shores) water distribution system is physically manifolded, wherein each point of diversion is capable of serving the entire service area (place of use), and it serves numerous existing and proposed end users, only a generalized water use assessment that considers the system as a whole is feasible.

DNRC issued a Technical Assessment (TA) for Salish Shores Change Application No. 76N 30165123 on March 20, 2025. The proposed change incorporates all water rights owned by Salish Shores (three perfected permits and one un-perfected permit: 76N 30016270). The total combined diverted volume authorized by the four permits is 377.3 ac-ft/year, and the maximum combined flow rate for the permits is 1,448.5 gpm. DNRC's historical use analysis in the March 20, 2025 TA confirmed that the authorized diverted volume and flow rates equate to the historical diverted volumes and flow rates. The March 20, 2025 TA also found that the total combined historical consumed volume for the Salish Shores water rights portfolio is 37.73 ac-ft/yr, or 10% of the diverted volume.

Salish Shores is currently authorized to serve 569 connections (477 domestic and 92 commercial). A portion of the domestic and commercial uses are assumed to include a small amount of lawn and garden irrigation; data are not available to differentiate the water use distribution among the sub-purposes extant within the broader municipal appropriation.

As of 2024, only 144 of the authorized connections have been completed (117 domestic and 27 commercial), or 25% of the authorized number of connections. The highest annual water volume diverted in the Salish Shores system between 2007 and 2024 occurred in 2023, when a total of 52.98 ac-ft was diverted during that calendar year. **This is an average of 0.37 ac-ft/connection/year** (52.98 ac-ft / 144 users).

Table 1 presents a summary of the existing and proposed system water use. The Applicant's proposal to add 35 connections (8 domestic and 27 commercial) to the service area (place of use) would increase the total number of authorized connections to 604. Assuming an average use of 0.37 ac-ft per connection, the proposed 35 new connections would equate to 12.95 ac-ft/year of additional use.

Table 1: Salish Shores Authorized, Existing, and Proposed Water Use

	System Connections			
Connection Type	Authorized	In Use (2024)	Proposed	
Domestic	477	117	485	
Commercial	92	27	119	
Total	569	144	604	
Max diverted vol	377.3 ac-ft	52.98 ac-ft ⁽²⁾	223.48 ac-ft ⁽³⁾	
Vol per connection	0.66 ac-ft ⁽¹⁾	0.37 ac-ft	0.37 ac-ft ⁽²⁾	

¹ 377.3 ac-ft / 569 connections = 0.66 ac-ft

Following authorization to increase the number of connections to 604, approximately 223.48 ac-ft/yr (604 connections x 0.37 ac-ft/connection) is expected to be diverted by the Salish Shores system, which is well below the total authorized diverted volume of 377.3 ac-ft/yr, and there is ample un-perfected water authorized under Permit No. 76N 30016270 to grow into.

Using the AWWA Manual M22 water line/meter sizing methodology, a project water demand calculation was made to estimate the peak instantaneous demand needed if all 604 proposed authorized connections were drawing on the system. Per the attached calculation summary, typical fixtures for the 485 proposed authorized residential connections and the 119 proposed authorized commercial connections were analyzed using AWWA's methodology and a peak demand was calculated for each use. This resulted in a peak demand of 1,222 gpm for residential connections and 177 for commercial connections for a total peak demand of 1,399 gpm, which is less than the authorized maximum combined flow rate of 1,448.5 gpm. Simultaneous use by all connections is extremely unlikely, but should the scenario occur, sufficient flow rate would be available for all users. See the attached AWWA Sizing Calculation Summary for further detail.

In addition to all of this, Salish Shores has ample unperfected water rights capacity to service additional areas with municipal water, from both a volumetric and flow rate perspective (see Permit No. 76N 30016270).

Attachments:

- Well Logs for all Existing and Proposed PODs
- Possessory Interest Letter signed by Todd Wakefield
- AWWA Instantaneous Peak Demand Calculation Summary

 $^{^2}$ 52.98 ac-ft / 144 connections = 0.37 ac-ft; from the highest annual volume diverted in 2023

³ 604 connections x 0.37 ac-ft = 223.48 **estimated**

This well log reports the activities of a licensed Montana well driller, serves as the official record of work done within the borehole and casing, and describes the amount of water encountered. This report is compiled electronically from the contents of the Ground Water Information Center (GWIC) database for this site. Acquiring water rights is the well owner's responsibility and is NOT accomplished by the filing of this report.

Other Options

Return to menu
Plot this site in State Library Digital Atlas
Plot this site in Google Maps
View scanned well log (7/14/2009 2:46:40 PM)

Site Name: LEUFKIN BUD & JUDY

GWIC Id: 135335

DNRC Water Right: 81519

Section 1: Well Owner(s)

1) LEUFKIN, BUD AND JUDY (MAIL)

BOX 1030

THOMPSON FALLS MT 59873 [04/08/1992]

Section 2: Location

Township	Range	Section	Quarter Sections
21N	29W	16	SW1/4 NE1/4 SE1/4
C	County		Geocode

SANDERS

Addition

INDLKS			
Latitude	Longitude	Geomethod	Datum
47.575657	-115.316001	TRS-SEC	NAD83

Ground Surface Altitude Ground Surface Method Datum Date casing.

Block

Section 7: Well Test Data

Total Depth: 121 Static Water Level: 22 Water Temperature:

Air Test *

50 gpm with drill stem set at _ feet for 3 hours. Time of recovery _ hours. Recovery water level _ feet. Pumping water level 30 feet.

* During the well test the discharge rate shall be as uniform as possible. This rate may or may not be the sustainable yield of the well. Sustainable yield does not include the reservoir of the well casing.

Section 3: Proposed Use of Water There are no uses assigned to this well.

Section 4: Type of Work
Drilling Method: ROTARY

Status: NEW WELL

Section 5: Well Completion Date

Date well completed: Wednesday, April 8, 1992

Section 6: Well Construction Details

From To Diameter
0 121 10

•	'-	٠.	
Casin	a		
Ousing	9		

			Wall	Pressure		
From	То	Diameter	Thickness	Rating	Joint	Type
2	121	6.625	0.25		WELDED	STEEL

Completion (Perf/Screen)

From	То		 Size of Openings	Description
121	121	6.625		OPEN BOTTOM

Annular Space (Seal/Grout/Packer)

			Cont.
From	То	Description	Fed?
0	20	BENTONITE	

Section 8: Remarks

Section 9: Well Log Geologic Source

Unassigned

Lot

Unassi	Unassigned					
From	То	Description				
0	25	BOULDERS; DARK SAND				
25	114	YELLOW CLAY				
114	121	BLUE CLAY; GRAVEL; WATER				

Driller Certification

All work performed and reported in this well log is in compliance with the Montana well construction standards. This report is true to the best of my knowledge.

Name: GARRY KANE

Company: KANE WELL DRILLING & PUMP SERVICE

License No: WWD-34

Date Completed: 4/8/1992

This well log reports the activities of a licensed Montana well driller, serves as the official record of work done within the borehole and casing, and describes the amount of water encountered. This report is compiled electronically from the contents of the Ground Water Information Center (GWIC) database for this site. Acquiring water rights is the well owner's responsibility and is NOT accomplished by the filing of this report.

Other Options

Return to menu
Plot this site in State Library Digital Atlas
Plot this site in Google Maps
View scanned well log (7/14/2009 2:45:57 PM)

Site Name: LEUFKENS BUD

GWIC Id: 131977

Section 1: Well Owner(s)

1) LEUFKENS, BUD (MAIL)

BOX 1030

THOMPSON FALLS MT 59873 [07/14/1992]

Section 2: Location

TownshipRangeSectionQuarter Sections21N29W16SW1/4 NE1/4 SE1/4CountyGeocode

SANDERS

LatitudeLongitudeGeomethodDatum47.575657-115.316001TRS-SECNAD83Ground Surface AltitudeGround Surface MethodDatumDate

Addition Block Lot

Section 3: Proposed Use of Water

TEST WELL (1)

Section 4: Type of Work
Drilling Method: ROTARY
Status: NEW WELL

Section 5: Well Completion Date
Date well completed: Tuesday, July 14, 1992

Section 6: Well Construction Details

Borehole dimensions
From To Diameter
0 141 10

Casing							
			Wall	Pressure			
From	То	Diameter	Thickness	Rating	Joint	Туре	
2	141	6.625	0.25		WELDED	STEEL	

Completion (Perf/Screen)

			# of	Size of	
From	То	Diameter	Openings	Openings	Description
141	141	6.625			OPEN BOTTOM

Annular Space (Seal/Grout/Packer)

From	То	Description	Cont. Fed?	
0	18	BENTONITE		

Section 7: Well Test Data

Total Depth: 141 Static Water Level: 21 Water Temperature:

Air Test *

<u>100</u> gpm with drill stem set at _ feet for <u>2</u> hours. Time of recovery _ hours.

Recovery water level _ feet.
Pumping water level _ 60 feet.

* During the well test the discharge rate shall be as uniform as possible. This rate may or may not be the sustainable yield of the well. Sustainable yield does not include the reservoir of the well casing.

Section 8: Remarks

Section 9: Well Log Geologic Source

Unassigned

Unassi	gnea	
From	То	Description
0	1	SOIL
1	20	BOULDERS- GRAVEL
20	22	CLAY(YELLOW)
22	35	WATER- GRAVEL
35	121	BROWN CLAY
121	141	GRAVEL- WATER

Driller Certification

All work performed and reported in this well log is in compliance with the Montana well construction standards. This report is true to the best of my knowledge.

Name: EUGENE KANE

Company: KANE WELL DRILLING & PUMP SERVICE

License No: WWC-23

Date Completed: 7/14/1992

This well log reports the activities of a licensed Montana well driller, serves as the official record of work done within the borehole and casing, and describes the amount of water encountered. This report is compiled electronically from the contents of the Ground Water Information Center (GWIC) database for this site. Acquiring water rights is the well owner's responsibility and is NOT accomplished by the filing of this report.

Other Options

Return to menu
Plot this site in State Library Digital Atlas
Plot this site in Google Maps
View scanned well log (7/14/2009 2:41:52 PM)

Site Name: LE SKIN BUD

GWIC Id: 139319

Section 1: Well Owner(s)
1) LE SKIN, BUD (MAIL)

PO BOX 1030

THOMPSON FALLS MT 59873 [06/10/1993]

Section 2: Location

TownshipRangeSectionQuarter Sections21N29W15SW1/4 SW1/4 SE1/4CountyGeocode

SANDERS

LatitudeLongitudeGeomethodDatum47.571978-115.299863TRS-SECNAD83Ground Surface AltitudeGround Surface MethodDatumDate

Addition Block Lot

SALISH SHORES

Section 3: Proposed Use of Water

DOMESTIC (1) TEST WELL (2)

Section 4: Type of Work Drilling Method: ROTARY

Status: NEW WELL

Section 5: Well Completion Date

Date well completed: Thursday, June 10, 1993

Section 6: Well Construction Details

From To Diameter
0 240 8

Casing

From	То	Diameter	Wall Thickness	Pressure Rating	Joint	Туре
2	240	6	0.25			STEEL

Completion (Perf/Screen)

From	То		 Size of Openings	Description
240	240	6.625		OPEN BOTTOM

Annular Space (Seal/Grout/Packer)

From	То	Description	Cont. Fed?
0	20	BENTONITE	

Section 7: Well Test Data

Total Depth: 240 Static Water Level: 35 Water Temperature:

Air Test *

250 gpm with drill stem set at _ feet for 3 hours.

Time of recovery <u>1</u> hours. Recovery water level <u>35</u> feet. Pumping water level <u>60</u> feet.

* During the well test the discharge rate shall be as uniform as possible. This rate may or may not be the sustainable yield of the well. Sustainable yield does not include the reservoir of the well casing.

Section 8: Remarks

Section 9: Well Log Geologic Source

Unassigned

Unassi	gnea	
From	То	Description
0	28	BOULDERS GRAVEL
28	228	BLUE CLAY FINE DARK SAND
228	240	YELLOW CLAY GRAVEL WATER

Driller Certification

All work performed and reported in this well log is in compliance with the Montana well construction standards. This report is true to the best of my knowledge.

Name: GARRY KANE

Company: KANE WELL DRILLING & PUMP SERVICE

License No: WWD-34

Date Completed: 6/10/1993

This well log reports the activities of a licensed Montana well driller, serves as the official record of work done within the borehole and casing, and describes the amount of water encountered. This report is compiled electronically from the contents of the Ground Water Information Center (GWIC) database for this site. Acquiring water rights is the well owner's responsibility and is NOT accomplished by the filing of this report.

Other Options

Return to menu
Plot this site in State Library Digital Atlas
Plot this site in Google Maps
View scanned well log (7/14/2009 2:41:39 PM)

Site Name: LE SKIN BUD

GWIC Id: 139318

Section 1: Well Owner(s)
1) LE SKIN, BUD (MAIL)
PO BOX 1030

THOMPSON FALLS MT 59873 [06/13/1993]

Section 2: Location

TownshipRangeSectionQuarter Sections21N29W15SW1/4 SW1/4 SE1/4CountyGeocode

SANDERS

LatitudeLongitudeGeomethodDatum47.571978-115.299863TRS-SECNAD83Ground Surface AltitudeGround Surface MethodDatumDate

Addition Block Lot

SALISH SHORES

Section 3: Proposed Use of Water

DOMESTIC (1) TEST WELL (2)

Section 4: Type of Work Drilling Method: ROTARY

Status: NEW WELL

Section 5: Well Completion Date

Date well completed: Sunday, June 13, 1993

Section 6: Well Construction Details

Borehole dimensions
From To Diameter
0 246 8

Casing

From	То		Wall Thickness	Pressure Rating	Joint	Туре
2	246	6.625	0.25			STEEL

There are no completion records assigned to this well.

Annular Space (Seal/Grout/Packer)

- Iniui		pade (Geane	Cont.
From	То	Description	Fed?
0	20	BENTONITE	

Section 7: Well Test Data

Total Depth: 246 Static Water Level: 33 Water Temperature:

Air Test *

 $\underline{50}$ gpm with drill stem set at _ feet for $\underline{2}$ hours. Time of recovery $\underline{0.5}$ hours.

Recovery water level <u>33</u> feet. Pumping water level <u>40</u> feet.

* During the well test the discharge rate shall be as uniform as possible. This rate may or may not be the sustainable yield of the well. Sustainable yield does not include the reservoir of the well casing.

Section 8: Remarks

Section 9: Well Log Geologic Source

Unassigned

Unassi	gnea	
From	То	Description
0	26	BOULDERS GRAVEL
26	224	BLUE CLAY FINE DARK SAND
224	246	GRAVEL YELLOW CLAY WATER

Driller Certification

All work performed and reported in this well log is in compliance with the Montana well construction standards. This report is true to the best of my knowledge.

Name: GARRY KANE

Company: KANE WELL DRILLING & PUMP SERVICE

License No: WWD-34

Date Completed: 6/13/1993

This well log reports the activities of a licensed Montana well driller, serves as the official record of work done within the borehole and casing, and describes the amount of water encountered. This report is compiled electronically from the contents of the Ground Water Information Center (GWIC) database for this site. Acquiring water rights is the well owner's responsibility and is NOT accomplished by the filing of this report.

Other Options

Return to menu
Plot this site in State Library Digital Atlas
Plot this site in Google Maps
View scanned well log (7/14/2009 2:38:53 PM)

Site Name: THE LEUFKENS CO

GWIC Id: 175584

Section 1: Well Owner(s)

1) THE LEUFKENS COMPANY (MAIL)

BOX 1030

THOMPSON FALLS MT 59873 [02/09/1995]

Section 2: Location

TownshipRangeSectionQuarter Sections21N29W15SW½ NW½CountyGeocode

SANDERS

LatitudeLongitudeGeomethodDatum47.580198-115.309286TRS-SECNAD83Ground Surface AltitudeGround Surface MethodDatumDate

Addition Block Lot

Section 3: Proposed Use of Water

DOMESTIC (1)

Section 4: Type of Work

Drilling Method: ROTARY

Status: NEW WELL

Status: NEW WELL

Section 5: Well Completion Date

Date well completed: Thursday, February 9, 1995

Section 6: Well Construction Details

Borehole dimensions
From To Diameter
0 367 7.625

C	а	s	i	n	g

			Wall	Pressure		
From	То	Diameter	Thickness	Rating	Joint	Туре
-2	367	6	0.25		WELDED	STEEL

Completion (Perf/Screen)

			# of	Size of	
From	То	Diameter	Openings	Openings	Description
367	367	6			OPEN BOTTOM

Annular Space (Seal/Grout/Packer)

From	То	Description	Cont. Fed?	ı
0	20	BENTONITE		

Section 7: Well Test Data

Total Depth: 367 Static Water Level: 50 Water Temperature:

Air Test *

160 gpm with drill stem set at _ feet for 2 hours.

Time of recovery <u>0</u> hours. Recovery water level <u>_</u> feet. Pumping water level <u>_</u> feet.

* During the well test the discharge rate shall be as uniform as possible. This rate may or may not be the sustainable yield of the well. Sustainable yield does not include the reservoir of the well casing.

Section 8: Remarks

Section 9: Well Log Geologic Source

Unassigned

Unassigned					
From	То	Description			
0	3	TOPSOIL CLAY			
3	19	CLAY GRAVEL			
19	330	SAND SILT FINE MOIST			
330	350	CLAY BROWN SOFT			
350	367	GRAVEL COBBLES			

Driller Certification

All work performed and reported in this well log is in compliance with the Montana well construction standards. This report is true to the best of my knowledge.

Name: ANTHONY KRAUT

Company: KRASS DRILLING & PUMP SERVICE

License No: WWC-66

Date Completed: 2/9/1995

This well log reports the activities of a licensed Montana well driller, serves as the official record of work done within the borehole and casing, and describes the amount of water encountered. This report is compiled electronically from the contents of the Ground Water Information Center (GWIC) database for this site. Acquiring water rights is the well owner's responsibility and is NOT accomplished by the filing of this report.

Other Options

Return to menu
Plot this site in State Library Digital Atlas
Plot this site in Google Maps
View scanned well log (7/14/2009 2:38:39 PM)

Site Name: THE LEUFKENS CO

GWIC Id: 175632

Section 1: Well Owner(s)

1) THE LEUFKENS COMPANY (MAIL)

BOX 1030

THOMPSON FALLS MT 59873 [07/31/1997]

Section 2: Location

TownshipRangeSectionQuarter Sections21N29W15SW1/4 NW1/4CountyGeocode

SANDERS

LatitudeLongitudeGeomethodDatum47.580198-115.309286TRS-SECNAD83Ground Surface AltitudeGround Surface MethodDatumDate

Addition Block Lot

Pump Test *

Air Test *

Depth pump set for test 160 feet.

Section 7: Well Test Data

Time of recovery 1 hours.

Recovery water level 30 feet.

Pumping water level 150 feet.

Total Depth: 355

Static Water Level: 30 Water Temperature:

240 gpm pump rate with 150 feet of drawdown after 5 hours of

200 gpm with drill stem set at feet for 10 hours.

pumping.

Time of recovery <u>1</u> hours. Recovery water level <u>30</u> feet. Pumping water level _ feet.

Section 3: Proposed Use of Water
There are no uses assigned to this well.

Section 4: Type of Work Drilling Method: ROTARY

Status: NEW WELL

Section 5: Well Completion Date
Date well completed: Thursday, July 31, 1997

Section 6: Well Construction Details

From To Diameter
0 355 7.5

Casing

			Wall	Pressure		
From	То	Diameter	Thickness	Rating	Joint	Type
-2	355	6.625	0.25		WELDED	A53B STEEL

Completion (Perf/Screen)

			# of	Size of	
From	То	Diameter	Openings	Openings	Description
355	355	6.625			OPEN BOTTOM

Annular Space (Seal/Grout/Packer)

			Cont.
From	То	Description	Fed?
0	25	BENTONITE	Υ

* During the well test the discharge rate shall be as uniform as possible. This rate may or may not be the sustainable yield of the well. Sustainable yield does not include the reservoir of the well casing.

Section 8: Remarks

Section 9: Well Log Geologic Source

Unassigned

From	То	Description
0	10	TOPSOIL SAND GRAVEL
10	15	COARSE GRAVEL
15	35	SAND GRAVEL
35	200	FINE SILTY CLAY BROWN
200	240	FINE SILTY CLAY HARD BROWN
240	315	FINE SILTY CLAY SOFT BROWN
315	325	FINE SAND WATER GRAY
325	350	SILTY SAND FINE
350	355	GRAVEL BOULDERS

Driller Certification

All work performed and reported in this well log is in compliance with the Montana well construction standards. This report is true to the best of my knowledge.

Name: HARLAN KRASS

Company: KRASS DRILLING & PUMP SERVICE

License No: WWC-481

Date Completed: 7/31/1997

This well log reports the activities of a licensed Montana well driller, serves as the official record of work done within the borehole and casing, and describes the amount of water encountered. This report is compiled electronically from the contents of the Ground Water Information Center (GWIC) database for this site. Acquiring water rights is the well owner's responsibility and is NOT accomplished by the filing of this report.

Other Options

Return to menu
Plot this site in State Library Digital Atlas
Plot this site in Google Maps
View scanned well log (7/14/2009 2:39:11 PM)

Site Name: THE LEUFKENS CO

GWIC Id: 175585

Section 1: Well Owner(s)

1) THE LEUFKENS COMPANY (MAIL)

BOX 1030

THOMPSON FALLS MT 59873 [08/18/1998]

Section 2: Location

Township	Range	Section	Quarter Sections
21N	29W	15	NE1/4 SW1/4 NW1/4
(County		Geocode

SANDERS

Latitude	Longitud	le Geomethod	Dat	um
47.581111	-115.3079	94 TRS-SEC	NAD	083
Ground Surface	Altitudo	Ground Surface Method	Datum	Date

Addition Block Lot

Section 3: Proposed Use of Water

There are no uses assigned to this well.

Section 4: Type of Work
Drilling Method: ROTARY
Status: NEW WELL

Section 5: Well Completion Date

Date well completed: Tuesday, August 18, 1998

Section 6: Well Construction Details

Borehole dimensions							
From	То	Diameter					
0	423	7.5					

Cas	i	r	1	Q

From	То		Wall Thickness	Pressure Rating	1	Туре
-2	423	6.625	0.25		WELDED	A53B STEEL

Completion (Perf/Screen)

			# of	Size of	
From	То	Diameter	Openings	Openings	Description
423	423	6.625			OPEN BOTTOM

Annular Space (Seal/Grout/Packer)

,a.	<u> </u>	paco (ocan orcan				
			Cont.			
From	То	Description	Fed?			
0	25	BENTONITE				

Section 7: Well Test Data

Total Depth: 423 Static Water Level: 32 Water Temperature:

Air Test *

<u>75</u> gpm with drill stem set at _ feet for _ hours. Time of recovery <u>0.5</u> hours. Recovery water level <u>32</u> feet. Pumping water level <u>180</u> feet.

Datum * During the well test the discharge rate shall be as uniform as NAD83 possible. This rate may or may not be the sustainable yield of the well. Sustainable yield does not include the reservoir of the well casing.

Section 8: Remarks

Section 9: Well Log Geologic Source

Unassigned

From	То	Description
0	20	SAND GRAVEL
20	40	COARSE GRAVEL
40	50	SAND FINE SILTY BROWN
50	70	CLAY BROWN
70	90	SAND FINE SILTY BROWN
90	135	CLAY BROWN
135	145	SAND FINE SILTY BROWN
145	155	CLAY SOFT BROWN
155	265	SAND FINE SILTY TAN
265	285	CLAY SOFT TAN
285	405	SAND FINE SILTY TAN
405	415	CLAY MED SOFT TAN
415	423	SILT SAND GRAVEL
423	423	BOULDERS WATER

Driller Certification

All work performed and reported in this well log is in compliance with the Montana well construction standards. This report is true to the best of my knowledge.

Name: HARLAN KRASS

Company: KRASS DRILLING & PUMP SERVICE

License No: WWC-481

Date Completed: 8/18/1998

This well log reports the activities of a licensed Montana well driller, serves as the official record of work done within the borehole and casing, and describes the amount of water encountered. This report is compiled electronically from the contents of the Ground Water Information Center (GWIC) database for this site. Acquiring water rights is the well owner's responsibility and is NOT accomplished by the filing of this report.

Other Options

Return to menu Plot this site in State Library Digital Atlas Plot this site in Google Maps View scanned well log (7/14/2009 2:32:43 PM)

Site Name: HOMESTEAD ENTERPRISE

GWIC Id: 76372

Section 1: Well Owner(s)

1) HOMESTEAD ENTERPRISE (MAIL)

RT. #3 BOX 10

THOMPSON FALLS MT 59873 [12/12/1979]

Section 2: Location

Township	Range	Section	Quarter Sections
21N	29W	15	NW1/4
C	County		Geocode

SANDERS

Latitude	Longit	tude	Geomethod	Dat	um
47.582024	-115.30	6593	TRS-SEC	NAI	D83
Ground Surface	Altitude	Ground	d Surface Method	Datum	Date

Addition Block Lot

Section 3: Proposed Use of Water

COMMERCIAL (1)

Section 4: Type of Work

Drilling Method: FORWARD ROTARY

Status: NEW WELL

Section 5: Well Completion Date

Date well completed: Wednesday, December 12, 1979

Section 6: Well Construction Details

Borehole dimensions					
From	То	Diameter			
0	303	6			

U	505	
Casing	9	

From	То		Wall Thickness	Pressure Rating	Joint	Туре
-1	303	6				STEEL

Completion (Perf/Screen)

ООПІР	John pietron (1 en/Joureen)					
			# of	Size of		
From	То	Diameter	Openings	Openings	Description	
303	303	6			OPEN BOTTOM	

Annular Space (Seal/Grout/Packer)

,a.	<u> </u>	paco (coan creat	,, ao
			Cont.
From	То	Description	Fed?
0	30	SAND AND CLAY	

Section 7: Well Test Data

Total Depth: 303 Static Water Level: 75 Water Temperature:

Unknown Test Method *

Yield 50 gpm. Pumping water level 100 feet. Time of recovery _ hours. Recovery water level _ feet.

* During the well test the discharge rate shall be as uniform as possible. This rate may or may not be the sustainable yield of the Datum Date well. Sustainable yield does not include the reservoir of the well

Section 8: Remarks

Section 9: Well Log **Geologic Source**

Unassigned

Unassi	gnea	
From	То	Description
0	1	SOIL
1	40	BOULDERS AND SAND
40	165	FINE SAND, SEEPAGE
165	298	CLAY, SAND, SEEPAGE
298	303	GRAVEL, SAND, CLAY AND WATER

Driller Certification

All work performed and reported in this well log is in compliance with the Montana well construction standards. This report is true to the best of my knowledge.

Name: EUGENE KANE

Company: KANE WELL DRILLING & PUMP SERVICE

License No: WWC-23 **Date Completed: 12/12/1979** August 25, 2025

Montana Department of Natural Resources and Conservation 655 Timberwolf Pkwy Kalispell, MT 59901

RE:

Salish Shores Utility Corp. Change Application (No. 76N 30165123) Leufkens Family, LLC & Salish Shores Utility Corp. Shared Entity Thompson Falls, Sanders County, MT

To Whom It May Concern,

This letter is in response to the deficiency comment regarding Qs. 37. and 37.a in Salish Shores Utility Corp's recent change application (No. 76N 30165123). Although the proposed point of diversion is located on a property not owned by the utility corporation, I am the managing partner of both Leufkens Family, LLC and Salish Shores Utility Corp, and have a right to use all existing and proposed points of diversion. In addition to myself being the managing partner for both entities, the principal address, mailing address, and registered agent for each entity is also identical. This fact can be verified on the Montana Secretary of State website.

Sincerely.

Todd Wakefield Managing Partner Salish Shores Utility Corp. and Leufkens Family, LLC PO Box 1030 Thompson Falls, MT 59873

Signature

Print Name

Title

Date

PROJECTED WATER DEMAND

PROJECT: 20001572.02 - Salish Shores Utility Corp. POU/POD Change PREPARED BY: IMEG Consultants Corp.

September 17, 2025

Fixture Values based on 60 psi at Meter Outlet (from AWWA Manual M22 for Sizing Water Service Lines & Meters)

AWWA WATER DEMAND FIXTURE ANALYSIS						
Fixture Type	Number of Units	Fixture Value	Subtotal Fixture			
			Value			
Toilet (tank)	1208	4	4832			
Toilet (flush valve)	0	5	0			
Urinal (wall or stall)	0	6	0			
Urinal (flush valve)	0	7	0			
Bidet	0	8	0			
Shower (single head)	1208	9	10872			
Faucet (lavatory)	1208	10	12080			
Faucet (kitchen sink)	485	11	5335			
Faucet (utility sink)	0	12	0			
Dishwasher	485	13	6305			
Bathtub	1208	14	16912			
Clothes washer	485	15	7275			
Hose connections (with 50 ft of hose)	0	16	0			
1/2 in. (13 mm)	0	17	0			
5/8 in. (16 mm)	0	18	0			
3/4 in. (19 mm)	1208	19	22952			
Miscellaneous	0	20	0			
Bedpan washers	0	21	0			
Drinking fountains	0	22	0			
Dental units	0	23	0			
TOTAL FIXT	86563					

Demand (gpm) via Gr	aph Lower Line:	1399	60 psi
Multiplier:	0.74	1035.3	35 psi
Multiplier:	0.80	1119.2	40 psi
Multiplier:	0.90	1259.1	50 psi
Multiplier:	1.00	1399.0	60 psi
Multiplier:	1.09	1524.9	70 psi
Multiplier:	1.17	1636.8	80 psi
Multiplier:	1.25	1748.8	90 psi
Multiplier:	1.34	1874.7	100 psi

PROJECTED WATER DEMAND

PROJECT: 20001572.02 - Salish Shores Utility Corp. POU/POD Change PREPARED BY: IMEG Consultants Corp. September 17, 2025 Fixture Values based on 60 psi at Meter Outlet (from AWWA Manual M22 for Sizing Water Service Lines & Meters)

AWWA WATER DEMAND FIXTURE ANALYSIS

Fixture Type	Number of Units	Fixture Value	Subtotal Fixture Value
Toilet (tank)	970	4	3880
Toilet (flush valve)	0	35	0
Urinal (wall or stall)	0	16	0
Urinal (flush valve)	0	35	0
Bidet	0	2	0
Shower (single head)	970	2.5	2425
Faucet (lavatory)	970	1.5	1455
Faucet (kitchen sink)	485	2.2	1067
Faucet (utility sink)	0	4	0
Dishwasher	485	2	970
Bathtub	970	8	7760
Clothes washer	485	6	2910
Hose connections (with 50 ft of hose)	0		0
1/2 in. (13 mm)	0	5	0
5/8 in. (16 mm)	0	9	0
3/4 in. (19 mm)	970	12	11640
Miscellaneous	0		0
Bedpan washers	0	10	0
Drinking fountains	0	2	0
Dental units	0	2	0
TOTAL FIVE	LIDE COUNTS		22107

Demand (gpm) via Gr	aph Lower Line:	1222	60 psi
Multiplier:	0.74	904.3	35 psi
Multiplier:	0.80	977.6	40 psi
Multiplier:	0.90	1099.8	50 psi
Multiplier:	1.00	1222.0	60 psi
Multiplier:	1.09	1332.0	70 psi
Multiplier:	1.17	1429.7	iza 08
Multiplier:	1.25	1527.5	90 psi
Multiplier:	1.34	1637.5	100 psi

Instructions: Fill out the red numbers in the Assumptions box below; the calculations will automatically populate in the table to the left. Once the Total Fixture count is calculated, use the curves below to determine Demand (gpm). Enter this value in the Green cell.

Assumptions for Residential Connections: Used for Fixture Analysis				
# of Units	# of Bathrooms/Unit	# of Kitchens/Unit	# of Laundry rooms/Unit	# of 3/4" Hose Connections/Unit
485	2	1	1	2

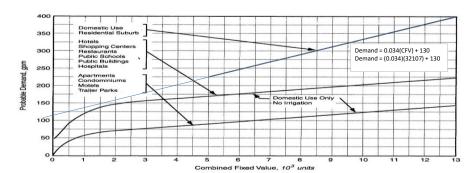


Figure 4-3 Water flow demand per fixture value—high range

PROJECTED WATER DEMAND

PROJECT: 20001572.02 - Salish Shores Utility Corp. POU/POD Change PREPARED BY: IMEG Consultants Corp.
September 17, 2025
Fixture Values based on 60 ps 1at Meter Outlet
(from AWWA Manual M22 for Sizing Water Service Lines & Meters)

Fixture Type	Number of Units	Fixture Value	Subtotal Fixture Value
Toilet (tank)	238	4	952
Toilet (flush valve)	0	35	0
Urinal (wall or stall)	0	16	0
Urinal (flush valve)	0	35	0
Bidet	0	2	0
Shower (single head)	238	2.5	595
Faucet (lavatory)	238	1.5	357
Faucet (kitchen sink)	0	2.2	0
Faucet (utility sink)	0	4	0
Dishwasher	0	2	0
Bathtub	238	8	1904
Clothes washer	0	6	0
Hose connections (with 50 ft of hose)	0		0
1/2 in. (13 mm)	0	5	0
5/8 in. (16 mm)	0	9	0
3/4 in. (19 mm)	238	12	2856
Miscellaneous	0		0
Bedpan washers	0	10	0
Drinking fountains	0	2	0
Dental units	0	2	0
TOTAL CIV	TUDE COUNTS		4444

Demand (gpm) via Gr	aph Lower Line:	177	60 psi
Multiplier:	0.74	131.0	35 psi
Multiplier:	0.80	141.6	40 psi
Multiplier:	0.90	159.3	50 psi
Multiplier:	1.00	177.0	60 psi
Multiplier:	1.09	192.9	70 psi
Multiplier:	1.17	207.1	80 psi
Multiplier:	1.25	221.3	90 psi
Multiplier:	1.34	237.2	100 ps

Instructions: Fill out the red numbers in the Assumptions box below; the calculations will automatically populate in the table to the left. Once the Total Fixture count is calculated, use the curves below to determine Demand (gpm). Enter this value in the Green cell.

Assumptions for Commercial Connections: Used for Fixture Analysis				
of Units	# of Bathrooms/Unit	# of Kitchens/Unit	# of Laundry rooms/Unit	# of 3/4" Hose Connections/Unit
119	2	0	0	2

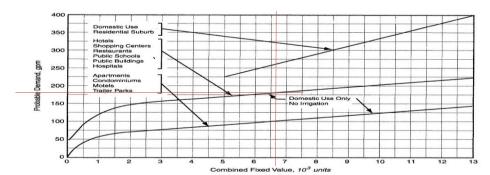


Figure 4-3 Water flow demand per fixture value—high range

THE MONTANA DEPARTMENT OF NATURAL RESOURCES AND CONSERVATION

GOVERNOR GREG GIANFORTE



DNRC DIRECTOR AMANDA KASTER

Water Resources Division – Kalispell Regional Office 655 Timberwolf Pkwy, Ste. 4 Kalispell, MT 59901-1215 (406) 752-2288 DNRCKalispellWater@mt.gov

August 18, 2025

SALISH SHORES UTILITY CORP INC PO BOX 1030 THOMPSON FALLS MT 59873-1030

Subject: Deficiency Letter for Change Application No. 76N 30165123

Dear Applicant,

The Department of Natural Resources and Conservation (DNRC or Department) has begun reviewing your application. This letter is to notify you of the deficiencies in your application as required in ARM 36.12.1501(1) and §85-2-302(5)(b), MCA. An Applicant is required to submit substantial and credible information addressing the rules and statutes that are relative to your application. You must provide the information specified below for your application to be considered correct and complete. "Correct and complete" means all of the information provided is substantial and credible and provides all of the information as required by applicable rules and statutes. The application as submitted contains deficiencies in the following section(s):

• Form 606, question 16. ARM 36.12.1305(2)(a): Identify the water right elements proposed for change, with a checkmark, for each water right proposed for change.

Your answer:

Water Right	76N 30016270	76N 97278-00	76N 85780-00	76N 81519-00	
Point of Diversion			✓	✓	
Place of Use	Ø			Ø	
Purpose of Use					
Place of Storage					

- O **Deficiency:** You did not check any boxes for Provisional Permit 76N 97278-00. Were no boxes checked intentionally, or was it simply an accidental oversight?
- Form 606, question 19.a. ARM 36.12.1305: Describe the location for all new and unchanged points of diversion to the nearest 10 acres. Label POD ID with the same POD ID number assigned for the proposed use map (question 18).
 - o Your answer: NE 1/4 NE 1/4 NW 1/4 of Section 15, Township 21N, Range 29W, Sanders County.



O Deficiency: If you revisit the Groundwater Change Technical Analyses Report – Part A I issued to you on March 20, 2025, you will see that I amended your proposed point of diversion legal land description to the NE ¼ NW ¼ NW ¼ of Section 15, Township 21N, Range 29W, Sanders County based on the maps you provided. Please review your maps and the Technical Analyses Report and verify the true legal land description of the proposed point of diversion.

• Form 606, questions 37. and 37.a. ARM 36.12.1802 and 36.12.1904:

- Q. 37. If you propose to add one or more points of diversion, do you own the land where all proposed points of diversion are located? If you do not propose to add one or more points of diversion, mark "NA" instead.
 - o Your answer: Yes
 - Deficiency: Per Department of Revenue property ownership records, the land where the proposed point of diversion is located is owned by LEUFKENS FAMILY LLC, not SALISH SHORES UTILITY CORP INC. If you do own the land where the proposed point of diversion is located, please provide documentation proving your ownership of this property.
- Q. 37.a. If no, submit documentation to show you have the right to use all points of diversion located on each property you do not own. This may include, but is not limited to, a well agreement, an easement, or permission of the party that owns the property where the proposed point(s) of diversion are located.
 - o Your answer: Question left blank.
 - Deficiency: Per Department of Revenue property ownership records, the land where the proposed point of diversion is located is owned by LEUFKENS FAMILY LLC, not SALISH SHORES UTILITY CORP INC. If you do own the land where the proposed point of diversion is located, please provide documentation proving your ownership of this property. If your answer to question 37. should have been 'No,' please submit documentation to show you have the right to use all points of diversion located on each property you do not own.

• Form 606, questions 39.b., 39.c., and 39.c. ARM 36.12.1904:

- Q. 39.b. For all wells that have been drilled, what is the name of the well driller and, if available, what is their license number?
 - o Your answer: Question left blank
 - o **Deficiency:** Please answer this question.
- Q. 39.c. For all wells yet to be drilled, will a licensed well driller construct the wells? If no wells are yet to be drilled, mark "NA" instead.
 - o Your answer: Question left blank
 - o **Deficiency:** Please answer this question.
- Q. 39.d. Submit any well logs not yet submitted to the Department, such as for wells drilled after submittal of Form 606P. If all well logs have been submitted to the Department, mark "NA."



Your answer: Question left blank

o **Deficiency:** Please answer this question.

• Form 606, question 40.b. ARM 36.12.1801(2)(b): For any of the purposes with no Department standard or with proposed beneficial use that falls outside of Department standards, explain how the use is reasonable for that purpose.

Your answer: Salish Shores has ample unperfected water rights capacity to service additional areas with municipal water (see Permit No. 76N 30016270). Proposed water use will continue to fall under the multiple sub-purposes that municipal water rights encompass (e.g., domestic, lawn and garden, commercial) and the amount of water Salish Shores is requesting to change is beneficial to the Thompson Falls community. The project completion notice will refine and provide more specific information regarding the fully perfected use.

O **Deficiency:** Per ARM 36.12.1801(2)(b), you must explain that the requested flow rate and volume for each purpose is reasonably needed to accomplish that purpose. Your request to change the place of use entails expanding the Salish Shores Utility Corp's municipal water service area. You must provide information demonstrating <a href="https://doi.org/10.1001/journal.org/10.1001/jour

As stated above, the information submitted to address the rules and statutes listed in this deficiency letter must be substantial credible information to be acceptable at the correct and complete determination. §§85-2-102 (9) and (26), MCA.

Please submit the information specified above to the Kalispell Regional Office by December 16, 2025. <u>This is the only deficiency letter that will be sent</u>. An application not corrected or completed within 120 days from the date of this letter is terminated per ARM 36.12.1501(2) and §85-2-302(6)(a), MCA.

IMPORTANT NOTICE: This will be the final opportunity for you to provide the required information to the Department. If all of the requested information in this letter is not postmarked or submitted within 120 days of this letter, the application will be terminated within 30 days, and the application fee will not be refunded.

Please contact me at (406) 752-2746 or Travis. Wilson@mt.gov if you have any questions.

Sincerely,

Travis Wilson

Water Resource Specialist Kalispell Regional Office

Cc via email: Bryan Gartland, Aspect Consulting



Application Materials

- Application
- Any information submitted with Application including maps

Application Materials



FILING FEE

\$2500/\$1500 - Without/with filing fee reduction.

\$400 – (The following types do not qualify for a filing fee reduction)

- Replacement well that exceeds 35 GPM or 10 AF per year
- Replacement municipal well that exceeds 450 GPM
- Replacement reservoir on the same source

INFORMATION

An application will be eligible for a filing fee reduction and expedited timelines if the applicant completes a preapplication meeting with the Department (ARM 36.12.1302(1)), which includes submitting any follow-up information identified by the Department (ARM 36.12.1302(3)(c)) and receiving either Department-completed technical analyses or Department review of applicant-submitted technical analyses (ARM 36.12.1302(4) and (5)). An application for the proposed project also must be submitted within 180 days of delivery of Department technical analyses or scientific credibility review and no element on the submitted application can be changed from the completed preapplication meeting form (ARM 36.12.1302(6)). If application is eligible for a filing fee reduction, \$500 paid for Form 606P-B will be credited toward filing fees shown above.

For Department Use Only

RECEIVED

28 JUL 2025

DNRC KALISPELL WATER RESOURCES

Application #	30165123	Basin 76N	
Priority Date	07/28/2025	Time 13:45	AM/PM
Rec'd ByT	W		
Fee Rec'd \$ _	1,500.00	Check # _ 4020)
Deposit Rece	ipt # MSS2601	312	
Payor Salis	sh Shores Utility	Corp / Leufkens, I	Buddy & Judy
Refund \$		Date	

Applicant Information: Add more as Applicant Name SALISH SHORES UTILIT	s necessary. TY CORP INC		
Mailing Address PO Box 1030		State MT	Zip <u>59873</u>
Phone Numbers: Home			
Email Address Todd Wakefield (owner/			
Applicant Name			
Mailing Address	City	State	_ Zip
Phone Numbers: Home	Work	Cell	
Email Address			
Applicant Name			
Mailing Address	City	State	_ Zip
Phone Numbers: Home	Work	Cell	
Email Address			
Contact/Representative Information	n: Add more as necessary.		
Contact/Representative is: ☐ Applican	t ☑ Consultant ☐ Attorney ☐ Ot	her	
Contact/Representative Name Bryan Ga	artland, Aspect Consulting (Geosyntec)	
Mailing Address PO Box 134	City Helena	State MT	Zip_59624
Phone Numbers: Home			9-7840
Email Address bryan.gartland@aspecto			

NOTE: If a contact person is identified as an attorney, all communication will be sent only to the attorney unless the attorney provides written instruction to the contrary (ARM 36.12.122(2)). If a contact person is identified as a consultant, employee, or lessee, the individual filing the water right form or objection form will receive all correspondence and a copy may be sent to the contact person (ARM 36.12.122(3)).



1

Answer every question and applicable follow-up questions. Use the checkboxes to denote yes ("Y"), no ("N"), or not applicable ("NA"). Questions that require items to be submitted to the Department have a submitted ("S") checkbox, which is marked when the required item is attached to the Application. Label all submitted items with the question number for which they were submitted. Narrative responses that are larger than the space provided can be answered in an attachment. If an attachment is used, specify "see attachment" on this form, and label the attachment with the question number. Constrain narrative responses to the specific question as is asked on the form; do not respond to multiple questions in one narrative. Responses in the form of a table may be entered into the table provided on this form or in an attachment. If an attachment is used, the table must have the exact headings found on this form, and "see attachment" must be entered as a response to the relevant question. Clearly label all units in tables and narrative responses.

PREAPPLICATION AND TECHNICAL ANALYSES INFORMATION

1. ☑ Y □ N	Do you elect for Department technical anal	yses to be used for criteria	assessment?
2. ☑ Y □ N Form Par	Did you have a preapplication meeting ANI t A and Part B (Form 606P-A and 606P-B)?	D complete a Change Preap	
IF QU	ESTION 2 IS NO, answer 2.a and 2.b:	introduction of Form 606P Pa	
2.a.	Submit the Technical Analyses Addendum	(Form 606-TAA).	
	☐ NA Submit the technical analyses, if you ses to be used for criteria assessment. Selectives.	•	
IF QU	ESTION 2 IS YES, answer 2.c, 2.d, and 2.	e:	
2.c.	☑ N Has any element of the project descri atory elements of the project described in the	• •	~
<u>Tł</u>	Please explain. ne project elements detailed in DNRC's 3 e same.	3/20/2025 Technical Anal	ysis Report remain
_			
2.c.ii.	☑ S Submit the Technical Analyses Adde	ndum (Form 606-TAA).	See Attachment A.1
	☐ N Are the technical analyses to be used leted during the preapplication process? If n		ctly the same as those
2.d.i.	Please explain.		
	he technical analyses completed during	the preapplication proces	s have not
<u>CI</u>	hanged.		
_			
_			
2.d.ii.	S Submit the Technical Analyses Adde	ndum (Form 606-TAA).	See Attachment A.1
	☐ N Did you elect in question 1 for Departnesment? If no:	nent technical analyses to b	e used for criteria
2.e.i.	☑ S Submit the technical analyses.		See Attachment A.2



APPLICATION ADDENDA AND REVIEW

3. ☐ S ☑ NA If the proposed change involves one or more places of storage, submit a Change Storage Addendum (Form 606-SA). This does not include reservoirs, pits, pit-dams, or ponds with a capacity less than 0.1 AF; water tanks; or cisterns (ARM 36.12.113(6)).
1. □ S ☑ NA If the project involves an appropriation that is greater than 5.5 CFS and 4,000 acre-feet, submit a Reasonable Use Addendum (Form 606-B).
5. ☐ S ☑ NA If the project involves out-of-state water use, submit an Out-of-State Use Addendum (Form 600/606-OSA).
6. ☐ S ☑ NA If the proposed purposes include marketing or selling water, submit a Water Marketing Purpose Addendum (Form 600/606-WMA). This doesn't include marketing for mitigation/aquifer recharge
7. □ S ☑ NA If the proposed purpose includes instream flow, submit a Change to Instream Flow Addendum (Form 606-IFA).
3. □ S ☑ NA If the proposed purposes include mitigation, aquifer recharge, or marketing for mitigation/aquifer recharge, submit a Mitigation Purpose Addendum (Form 606/606-MIT).
9. □ S ☑ NA If the project is in designated sage grouse habitat, submit a review letter from the Montana Sage Grouse Habitat Conservation Program.
10. ☐ S ☑ NA If you propose to add a point of diversion or place of use on State of Montana Trust Land, submit documentation of consent from DRNC Trust Lands Management Division. If you propose to add a place of use on Trust Land with all points of diversion on private land, then, at a minimum, that component of the change authorization will be temporary for the duration of the lease term (§ 85-2-441, MCA).
I1. ☐ Y ☑ NA You must provide a written notice of the application to each owner of an appropriation right sharing a point of diversion or means of conveyance (e.g., canal, ditch, flume, pipeline, or constructed waterway) pursuant to § 85-2-302(4)(c), MCA. Submit a copy of this notice and the recipient list.

APPLICATION DETAILS

12. How many change applications will be needed for this project? Refer to ARM 36.12.1305 for more information. One (1)

13. Fill out the table below for the water rights proposed for change.

Water Right No.	Current Authorized Flow Rate			Flow Ra Project	Means of Diversion		
	Flow	GPM	CFS	Flow	GPM	CFS	
76N 30016270	688.5			688.5	V		Wells
76N 97278-00	440.0	\		440.0	7		Wells
76N 85780-00	210.0			210.0	✓		Wells
76N 81519-00	110.0	<u> </u>		110.0	V		Wells



14. Is	the	sour	ce s	urface	water	or gro	undwater? <u>Gr</u>	ound	water					
15. W	/hat i	s the	e sou	ırce na	ame? <u>(</u>	Groun	ıdwater							
	entif	•		er righ	nt elem	ents p	proposed for cl	nange	, with a	a check	mark, for e	ach wate	er right	proposed
Wate No.	er Ri	ght	76	N 300)1627(76	N 97278-00	76N	N 8578	80-00	76N 815	19-00		
Poin Dive		n		V	7				V		V			
Plac Use				V	7				V		✓			
Purp Use	ose	of]									
Plac Stor														
his ov re 18. 🗹 se div sti wi by	storio verla quire S ection versi ructu II be v the ne m	cal copping of the control of the co	onveg g wa form omit ners abele plac plac he w nge.	eyance ter rig ation. a prop s, town ed with ees of s vater ri The m be sub	e struct hts. Mo posed u iship an a unic storage ghts an ap sho mitted,	ures, a use mand rand que PO e, and fter the ould fu if nec	ID ("H" follow all historical plan one map map created on ge, scale bar, DD ID ("P" follow place of use for proposed chally depict the vessary, to clean	aces of any be an ae north owed or all of ange, water arly co	of stora submit rial pho arrow, by a nu overlap regard rights, onvey a	otograp and th umber) oping w lless of as pro all requ	d historical necessary, See h or topogree following places of ater rights. whether thoosed, after red informations of the see of t	place of to clearly Attachme raphic male element use, con Include a eleme r the characteristics. Attachme	use for convert B.1 (ap that s: point veyand all eler nt will lange. I	or all (Figure 1) shows ts of ce ments that be modified
19							new and <i>unch</i> O number assi							
POD ID	1/4	1/4	1/4	Sec.	Twp.	Rge.	County	Lot	Block	Tract	Subdivision		Gov.	New or Unchanged
														-

See Attachment C.1



19.b. NA Describe the location of all historical PODs you propose to *retire*. Label POD ID with the same POD ID assigned for the historical use map (question 17). If none are proposed for retirement, select "NA" checkbox.

POD ID	1/4	1/4	1/4	Sec.	Twp.	Rge.	County	Lot	Block	Tract	Subdivision	Gov. Lot

		PODs? Means of diversion for surface water includes f diversion for groundwater includes well, developed
20. 🗹 Y	Y ☐ N Does the proposed change involve	a change in place of use?
	IF YES,	
20.	a. What are the geocodes of the proposed pl	ace of use?
	N/A - Municipal Use	

20.b. Describe the legal land description of the proposed place of use, and if the water rights being changed will have an irrigation or lawn and garden purpose, list the number of irrigated acres.

Acres	Gov't Lot	1/4	1/4	1/4	Sec.	Twp.	Rge.	County
	Total							

See Attachment C.2



21. ☑ Y □ N [Does the proposed	change involve a	change in	place of u	se or pu	ırpose?	
IF Y	ES,						
21.a. ☑ Y 🗌	N Do other water	er rights suppleme	nt or overla	p the prop	posed p	lace of use?	
	IF YES,						
21.a.i. How will the water rights be operated to serve the proposed purposes?							
Although other existing water rights overlap the proposed place of use, they are not part of							
Salish Shores municipal water system and are not considered supplemental to the Salish Shores permits proposed for change. Per Kalispell Regional Office (1/8/2025 preapplication							
	ing), overlapping w		•		,		
<u> </u>	mg,, evenapping w	rater righte de riet	11000 10 50	uotanoa i	or a ma	morpar doo.	
						verage period of diversion f water (AF) contributed.	
Water Right	Avg. Period of Diversion	Avg. Period of Use	Flow Rat	te	Volume Contributed		
No.	MM/DD-MM/DD	MM/DD-MM/DD	Flow	GPM	CFS	AF	
N/A	See 21.a.i.						
22. □ Y ☑ N A	Are you filing on be	nan or another one					
23. □ Y ☑ N [Do you own the en	tire historical place	of use for	all water i	rights pr	oposed for change?	
IF (QUESTION 23 IS I	NO,					
23.a. ☑ Y 🔲	N Was the wate	r historically used	for sale. re	ntal distri	bution. ı	municipal use, or any other	
<u> </u>		· ·				ultimate user would not	
	e supply without co	•					
	IE QUESTION	22 a IS NO					
23.a.i. □	IF QUESTION	•	ch vou do	not own th	ao ontiro	e historical place of use.	
		water rights for will	Cit you do	HOL OWIT U	ie entile	e filstofical place of use.	
23.a.ii.	Y N Are the	water rights listed	in question	ı 23.a.i se	vered fro	om the historical place of	
	IF QUES	STION 23.a.ii IS YI	ΞS,				
	i i.1. □ Y □ N Do es, skip to question	•	•		ater righ	nts proposed for change? If	
	IF QUES	STION 23.a.ii OR 2	23.a.ii.1 IS	NO,			
	Y N N NA A			l place of	use or, i	f applicable, owners of the	

IF QUESTION 23.a.iii IS NO,

23.a.iii.1. ☐ **S** Submit a Form 641 or 642 to split the water rights being changed for which all owners will not sign.

ADVERSE EFFECT

24.	Explain how you can control your diversion in response to a call being made. See Attachment D.1
	Describe any plans you have for ensuring existing water rights will be satisfied during times of water shortage.
	See Attachment D.2
	☐ Y ☑ N Are you aware of any calls that have been made on the source of supply or, if groundwater, on nearby surface water sources? 26.a. If yes, explain.
27.	Describe how the proposed change will or will not affect your ability to make call. See Attachment D.3



_	Y ☑ N Does a water commissioner distribute water or oversee water distribution on your proposed urce, or if groundwater, on nearby surface water sources?
	.a. If yes, list the sources.
	hen was the last time each water right proposed for change was appropriated and used beneficially?
	IF THERE HAS BEEN A PERIOD OF NONUSE,
29	.a. Why was the water right not used? N/A
29	.b. Why will a resumption of use not adversely affect other water users? N/A
	IVA
29	.c. ☐ Y ☐ N Is the period of nonuse greater than 10 years for any of the water rights proposed for change? If yes, list which water rights. N/A
29	.d. Y N Have new water rights been authorized to use the source during the period of nonuse
	for any of the water rights proposed for change? If yes, explain. N/A

30. ☑ Y ☑ N Do you propose to add one or more points of diversion or use new or existing conveyance infrastructure that will be shared with one or more existing water rights?
30.a. If yes, describe how the capacity of the shared points of diversion and/or conveyance infrastructure is sufficient for all water rights and how the proposed project will not adversely affect these water rights.
The proposed groundwater point of diversion and associated conveyance infrastructure
will be associated with Salish Shores' existing water rights and distribution system only. No
other water rights or water users will be impacted and/or adversely affected by the
proposed change. The diversion and conveyance infrastructure has been designed by
project engineers to accommodate the respective pumping rates of the authorized wells
and the max combined diversion rate of 1,448.5 GPM.
 31. NA Answer questions 31.a to 31.b for point of diversion changes. If you do not propose a point of diversion change, mark "NA" instead. 31.a. Are the proposed points of diversion upstream or downstream of the historical points of diversion? All points of diversion (existing and proposed) are wells with a groundwater source.
31.b. ☐ Y ☑ N Are there intervening water users between the historical and proposed points of diversion?
31.b.i. If yes, list the water rights.
N/A - Groundwater

ADEQUATE MEANS OF DIVERSION AND OPERATION

32. Submit a diagram of how you will operate your system from all proposed points of diversion to all proposed places of use.

See Attachment B.2

_	clude, where applicable: pump curves and total dynamic head calculations, headgate design pecifications, and dike or dam height and length.
	See Attachment E.1
-	
_	
	escribe the size, materials, capacity, and configuration of infrastructure to convey water from all
	roposed points of diversion to all proposed places of use. See Attachment E.2
2	ee Allachment E.2
/	Y □ N Does the proposed conveyance require easements?
	5.a. If yes, explain.
	0 AU 1 1 50
	See Attachment E.3
	See Attachment E.3

place c	f use. This may include, where applicable, the range of flow rates needed for a pivot.
See A	ttachment E.4
_	
propos	N □ NA If you propose to add one or more points of diversion, do you own the land where all ed points of diversion are located? If you do not propose to add one or more points of diversion, IA " instead.
37.a.	
38. □ Y ☑ 38.a. If	N Will your system be designed to discharge water from the project? yes, explain the wastewater disposal method.
	<u>-</u>
	Y □ N □ NA Have the necessary permits been obtained to comply with §§ 75-5-410 and/or 2-364, MCA?
39. ☑ Y 🗆	N Is the means of diversion for any proposed point of diversion a well?
	IF YES,
39.a. ☑]Y□N Have all wells been drilled?
20 1- 5	
	or all wells that have been drilled, what is the name of the well driller and, if available, what is r license number?
	$Y \square N \square NA$ For all wells yet to be drilled, will a licensed well driller construct the wells? If now ls are yet to be drilled, mark "NA" instead.
	S □ NA Submit any well logs not yet submitted to the Department, such as for wells drilled a submittal of Form 606P. If all well logs have been submitted to the Department, mark "NA."



BENEFICIAL USE

40. ☐ Y ☑ N Does the Department have a standard period of diversion, period of use, flow rate, and/or volume for any of the purposes for which water is used? Department standards can be found in the DNRC Water Calculation Guide, ARM 36.12.112, ARM 36.12.115, and ARM 36.12.1902.
40.a. If yes, list the purposes for which the Department has a standard and note whether the water use falls within or outside the standard. N/A
40.b. For any of the purposes with no Department standard or with proposed beneficial use that falls outside of Department standards, explain how the use is reasonable for that purpose. See Attachment F.1
41. ☑ Y ☐ N Will your proposed project be subject to Montana Department of Environmental Quality (DEQ) requirements for a public water supply (PWS) system or Certificate of Subdivision Approval (COSA)?
 42. □ Y ☑ N Are you proposing to use surface water for in-house domestic use? 42.a. □ Y □ N If yes, does a COSA exist for the proposed place of use? 42.a.i. □ S If yes, submit the COSA.



POSSESSORY INTEREST

43. ☑ Y ☐ N Do you meet one of the exceptions to possessory interest requirements, pursuant to ARM 36.12.1802 and § 85-2-402(2)(d), MCA? Exceptions include cases where the application is for sale, rental, distribution, or is a municipal use, or in any other context in which water is being supplied to another and it is clear that the ultimate user will not accept the supply without consenting to the use of water on the user's place of use, and applications for the purposes of instream flow, mitigation, and marketing for mitigation.
43.a. If yes, explain. All water rights proposed for change are municipal use.
44. ☐ Y ☐ N ☑ NA Do you own all proposed places of use? Mark "NA" if you meet one of the exception to the possessory interest requirement.
44.a. ☐ S If no, explain and submit documentation that shows you either have possessory interest of written permission of the parties with possessory interest of the proposed place of use.
PROPOSED COMPLETION PERIOD
45. How many years will be needed to complete this project and to submit to the DNRC a Project
Completion Notice (Form 618)? 25 years (2050)
46. Describe why this amount of time is needed to complete this project.
Applicant needs additional time to develop and utilize water under un-perfected Permit No.
76N 30016270.



AFFIDAVIT & CERTIFICATION

Read carefully before you sign and review with legal counsel if you have any questions. All owners (or trustees) must sign the form. **If the owner is a business or trust, include the title of the representative(s) signing the form (i.e., president, trustee, managing partner, etc.) and provide documentation that establishes the authority of the representative to sign the application.

I affirm the information provided for this application is to the best of my knowledge true and correct. If a preapplication meeting form was submitted, I am aware that my application for this project will not qualify for a discounted filing fee and expedited timelines if upon submittal of the application to the Department, I changed any element of the proposed application from the preapplication meeting form and follow-up materials (ARM 36.12.1302(6)(a)).

I affirm I have possessory interest, or the written consent of the person with the possessory interest, in the property where the water is to be put to beneficial use, unless this application meets an exception to the possessory interest requirements in ARM 36.12.1802(1)(b).

I understand that making a false statement under oath or affirmation in this application and official proceedings throughout the examination of my application may subject me to prosecution under § 45-7-202, MCA, a misdemeanor punishable by a jail term not to exceed 6 months or a fine not to exceed \$500, or both. I have read this Affidavit and understand the terms and conditions.

I declare under penalty of perjury and under the laws of the state of Montana that the foregoing is true and correct.

Printed Name Todd E Wakefield, vice President	
Applicant Signature Sour Walefield	Date: 7~22~3025
Printed Name	_
Applicant Signature	Date:
Printed Name	_
Applicant Signature	Date:

TABLE OF CONTENTS

Salish Shores Utility Corporation, Inc. Change Application No. 76N 30165123 July 2025

FORM:

		Application	Purpose	
Count	Count Form Type		orm Type Water Rights	
			76N 30016270	
1	1 606	Application to Change a	76N 81519-00	Change DOLL and Add DOD
1 606	Water Right	Water Right 76N 85780-00	76N 85780-00	Change POU and Add POD
			76N 97278-00	

FORM 606 ATTACHMENTS:

Α	PREAPPLICATION AND	TECHNICAL	ANALYSIS	INFORMATION
---	--------------------	------------------	-----------------	-------------

- A.1 Form 606-TAA
- A.2 DNRC Technical Analysis Report (3/20/2025)
- B MAPS
- B.1 Existing (Historical) Use (Figure 1)
- B.2 Proposed Use (Figure 2)

C POINTS OF DIVERSION AND PLACE OF USE

- C.1 Existing and Proposed Points of Diversion
- C.2 Proposed Municipal Place of Use Details

D ADVERSE EFFECT

- D.1 Diversion Control
- D.2 Existing Water Right Protection
- D.3 Calls for Water

E ADEQUATE MEANS OF DIVERSION AND OPERATION

- E.1 Diversion Capacity
- E.2 System Conveyance
- E.3 Easements
- E.4 Plan of Operation

F PROPOSED BENEFICIAL USE

F.1 Municipal Beneficial Use



TRANSMITTAL LETTER

TO: DNRC Kalispell

ATTN: Travis Wilson

655 Timberwolf Pkwy, Ste. 4

Kalispell, MT 59901

Delivery Method:

Hand delivered to Missoula Office

DATE: 7/23/2025

FROM: IMEG Corp. c/o David Friedlander, P.E. JOB NAME: Salish Shores Utility Corp., Inc.

Change App No. 76N 30165123 LOCATION: Thompson Falls, MT

IMEG #: 20001572.02

SECTION #:

WE ARE TRANSMITTING THE FOLLOWING TO YOU:

- Wet-ink Signed Affidavit and Certification, Form 606

- \$1,500.00 Fee Check for Form 606 - Check # 4020

RECEIVED

DNRC Water Resources

Marco Aracol Legan

JUL 28 2025

Kalispell Unit

 $\hfill\Box$ For Your Information

□ As Requested

□ Shop Drawings

□ For Review/Comment

□ For Distribution

□ For Your Use

□ For Signature

REMARKS:

ATTACHMENT A

PREAPPLICATION AND TECHNICAL ANALYSIS INFORMATION

A.1 - Questions 2.c.ii. and 2.d.ii. Technical Analysis Addendum (Form 606-TAA)

A.2 - Question 2.e.i. Technical Analysis Report (DNRC, 3/20/2025)

Form No. 606-TAA (Revised 02/2025)

APPLICATION TO CHANGE A WATER RIGHT TECHNICAL ANALYSES ADDENDUM

§ 85-2-402, MCA

Answer every question and applicable follow-up questions. Use the checkboxes to denote yes ("Y") or no ("N"). Questions that require items to be submitted to the Department have a submitted ("S") checkbox, which is marked when the required item is attached to the Technical Analyses Addendum. Label all submitted items with the question number for which they were submitted. Narrative responses that are larger than the space provided can be answered in an attachment. If an attachment is used, mark the see attachment ("A") checkbox on this form and label the attachment with the question number. If no attachment is needed, leave the see attachment ("A) checkbox blank. Constrain narrative responses to the specific question as is asked on the form; do not respond to multiple questions in one narrative. Responses in the form of a table may be entered into the table provided on this form or in an attachment. If an attachment is used, the table must have the exact headings found on this form, and the see attachment ("A") checkbox on this form must be marked. Label units in narrative responses and tables.

APPLICATION DETAILS

Questions, Narrative Responses, and Tables	Check- boxes
1. Did you have a preapplication meeting AND complete a Change Preapplication Meeting Form (Form 606P)?	■Y□N
a. If no, complete the remainder of Form 606-TAA. Skip to question 2.	
b. If yes,	
i. Do the technical analyses submitted with Form 606 remain unchanged from those completed during the preapplication meeting process?	■Y□N
 If yes, has any element of the project described in Form 606 changed from the mandatory elements of the project described in Forms 606P-A and/or 606P-B? 	□Y■N
a. If yes, complete the remainder of Form 606-TAA. Skip to question 2.	
b. If no, Form 606-TAA is complete.	
2. If no,	
a. Are you submitting new technical analyses with Form 606 to replace the technical analyses completed during the preapplication meeting process?	□Y□N
i. If yes, complete the remainder of Form 606-TAA. Skip to question 2.	
ii. If no, are you correcting the technical analyses in response to a Departmental scientific credibility review completed during the preapplication meeting process?	□ Y □ N

Per Form 606-TAA Question 1.b.i.1.b., additional information is not required on this form and pages 2-40 have been omitted from the application package.



THE MONTANA DEPARTMENT OF NATURAL RESOURCES AND CONSERVATION

GOVERNOR GREG GIANFORTE



DNRC DIRECTOR AMANDA KASTER

Water Resources Division – Kalispell Regional Office 655 Timberwolf Pkwy, Ste. 4 Kalispell, MT 59901-1215 (406) 752-2288 DNRCKalispellWater@mt.gov

March 20, 2025

SALISH SHORES UTILITY CORP INC PO BOX 1030 THOMPSON FALLS MT 59873-1030

Subject: Completed Technical Analyses Report for Change Preapplication No. 76N 30165123

Dear Applicant,

As designated on the submitted Preapplication Meeting Form per §85-2-302(3)(b), MCA, the Department of Natural Resources and Conservation (DNRC or Department) has completed the technical analyses for Change Preapplication No. 76N 30165123 based on the information provided in your Preapplication Meeting Form accepted by the Department on February 3, 2025. The technical analyses can be found in the attached report. Please note this Change Technical Analyses Report is a two-part publication, comprised of a Part A completed by Travis Wilson (Kalispell Regional Office), and a Part B completed by Evan Norman (Water Sciences Bureau).

This Technical Analyses Report IS: A collection of facts that the DNRC has gathered, including content provided in the Preapplication Meeting Form materials. The Department will use these data to analyze the criteria in §85-2-402, MCA if you submit an application for the project described in the completed Preapplication Meeting Form.

This Technical Analyses Report IS NOT: An analysis or discussion of whether the Preapplication Meeting Form as filed meets the criteria (§85-2-402, MCA).

You have 180 days to submit the Water Right Change Application Form 606 considering the information provided in the technical analyses and Preapplication Meeting Form. If the Application Form is not submitted to the Kalispell Regional Office by September 16, 2025, a new preapplication meeting will be required to process the Application with expedited timelines (ARM 36.12.1302(6)(b)). If any details described in the submitted Application are changed from that of the submitted Preapplication Meeting Form, the discounted filing fee and expedited timelines will not apply (ARM 36.12.1302(6)(a)). Please note that the technical analyses will expire one year from the date of this letter (ARM 36.12.1302(8)).

If you have any questions, please contact me at (406) 752-2746 or Travis. Wilson@mt.gov.

Sincerely,

Travis Wilson

Water Resource Specialist

Kalispell Regional Water Resource Office

Encl.: Groundwater Change Technical Analyses Report Parts A-B

Cc via email: Bryan Gartland, Aspect Consulting





Groundwater Change Technical Analyses Report - Part A

Department of Natural Resources and Conservation (DNRC or Department) Water Resources Division

Travis Wilson, Water Resources Specialist, Kalispell Regional Office

Application No.	76N 30165123	Proposed Point of Diversion	NENWNW of Sec 15, Twp 21N, Rge 29W, Sanders County			
Applicant	Salish Shores Utility Corp Inc.					

Overview

This report is Part A of a two-part publication which analyzes data submitted by the Applicant in support of the above-mentioned water right application. This report provides technical analyses as required under the Administrative Rules of Montana (ARM) 36.12.1303 in support of the water rights criteria assessment as required in §85-2-402, Montana Code Annotated (MCA).

This Groundwater Change Technical Analyses Report – Part A contains the following sections:

Overview	1
Variances	1
1.0 Application Details	
2.0 Historical Use Analysis	
2.1 Summary of Historical Use	
Review	
References	
F CATAT ATTA AN	

Variances

No variances were required from ARM 36.12.121.

1.0 Application Details

The Applicant proposes to add an eighth point of diversion (POD) to the Salish Shores water system and to change the place of use to cover the full projected Salish Shores water service area. No additional flow rate or volume is requested or required to supply the expanded service area. The project is in Sanders County and the source is groundwater. This change involves Provisional Permit Nos. 76N 81519-00, 76N 85780-00, 76N 97278-00, and 76N 30016270, which are the water rights serving the manifold Salish Shores water system. The details of these existing water rights are summarized in Tables 1 and 2. These water rights were previously changed by unperfected water right Change Application No. 76N 30027719. Provisional Permit Nos. 76N 81519-00, 76N 85780-00, and 76N 97278-00 are perfected permits, while Provisional Permit No.



76N 30016270 is unperfected. The proposed eighth POD and proposed new places of use are summarized in Tables 3 and 4, respectively.

Table 1: Summary of Water Rights Proposed for Change										
Water Right Number	Priority Date	Purpose	Flow Rate (GPM)	Volume (AF)	Period of Diversion & Use	Means of Diversion	Points of Diversion	Places of Use		
76N 81519 - 00	May 14, 1992		110.0	48.90		W-11- (7)	See Table 2 (same for all four provisional permits)			
76N 85780-00	June 1, 1993	Municipal	210.0	104.32	01/01 -					
76N 97278-00	May 17, 1996	Municipal	440.0	25.98	12/31	Wells (7x)				
76N 30016270	August 19, 2005		688.5	198.10						

Table 2: Summary of the Points of Diversion and Places of Use for the Water Rights Proposed for Change

The four provisional permit water rights proposed for change serve a manifold system and share all of the same points of diversion and places of use.

POD ID	GWIC ID	1/4	1/4	1/4	Section	Township	Range	County
1	135335	SW	NE	SE	16	21 N	29 W	Sanders
2	131977	SW	NE	SE	16	21 N	29 W	Sanders
3	139319	SW	SW	SE	15	21 N	29 W	Sanders
4	139318	SW	SW	SE	15	21 N	29 W	Sanders
5	175584	NE	SW	NW	15	21 N	29 W	Sanders
6	175632	NE	SW	NW	15	21 N	29 W	Sanders
7	175585	NE	SW	NW	15	21 N	29 W	Sanders
POU ID		1/4	1/4	1/4	Section	Township	Range	County
1					15	21 N	29 W	Sanders
2				E2	16	21 N	29 W	Sanders
3			W2	SW	13	21 N	29 W	Sanders
4					14	21 N	29 W	Sanders
5			N2	N2	22	21 N	29 W	Sanders
6			N2	N2	23	21 N	29 W	Sanders

Table 3: Proposed Point of Diversion for the Water Rights Proposed for Change								
GWIC ID	1/4	1/4	1/4	Section	Township	Range	County	
76372	NE	NW	NW	15	21 N	29 W	Sanders	



T	Table 4: Proposed Places of Use for the Water Rights Proposed for Change								
POU ID	1/4	1/4	Section	Township	Range	County			
7	E2	SW	9	21 N	29 W	Sanders			
8	W2	SE	9	21 N	29 W	Sanders			
9	SE	SE	9	21 N	29 W	Sanders			
10	SW	SW	10	21 N	29 W	Sanders			
11	NE	NW	14	21 N	29 W	Sanders			
12		NE	14	21 N	29 W	Sanders			
13	SE	NW	14	21 N	29 W	Sanders			
14	NE	SE	14	21 N	29 W	Sanders			
15	N2	NE	15	21 N	29 W	Sanders			

Note: These are the legal land descriptions of the proposed new places of use only. These will be combined with the existing places of use and summarized in their most simplified form to describe the place of use of the total Salish Shores service area in the official water right records. See Figure 2 for a breakdown of the existing and proposed places of use.

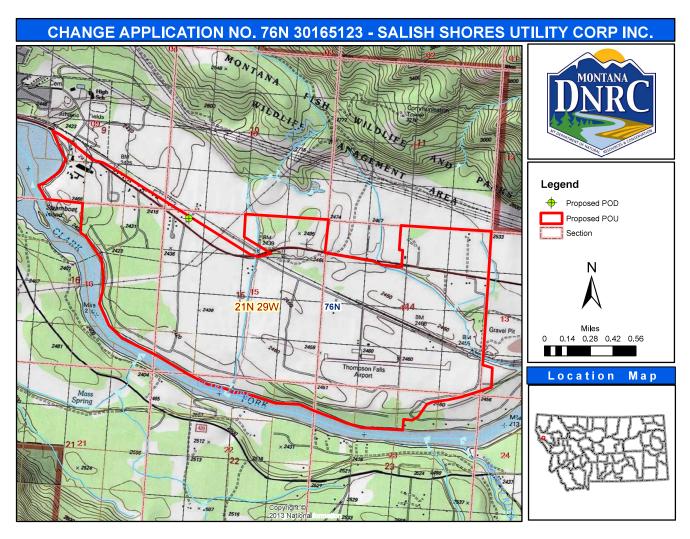


Figure 1: Project vicinity/overview map.



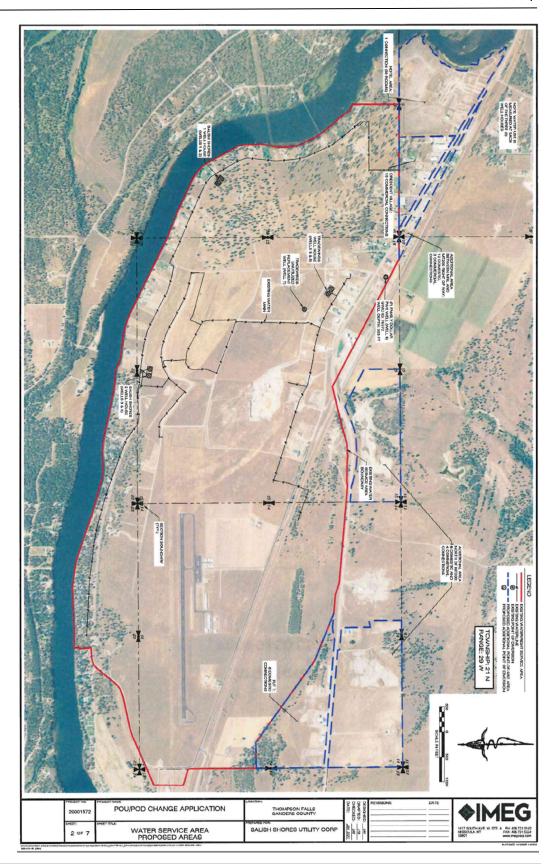


Figure 2. Map of the Applicant's proposed point of diversion, proposed place of use, existing/historical points of diversion, and historical place of use. The solid red outline delineates the existing place of use, while the dashed blue outlines delineate the proposed new places of use.



2.0 Historical Use Analysis

2.1 Summary of Historical Use

Provisional Permit Nos. 76N 81519-00, 76N 85780-00, 76N 97278-00, and 76N 30016270 were previously changed by unperfected water right Change Authorization No. 76N 30027719. These water rights are supplemental because they all share the same points of diversion and places of use. The historical use of these water rights was proven by the applicant and quantified by the DNRC in Change Authorization No. 76N 30027719. The applicant did not submit additional addenda or information with this application contradicting the Department's previous findings, therefore the DNRC will use the findings from the previous historical use analysis for this application. Provisional Permit Nos. 76N 81519-00, 76N 85780-00, and 76N 97278-00 are perfected permits. Provisional Permit No. 76N 30016270 is unperfected and therefore carries forward its full flow rate and volume to this change application. The historical use of these water rights is summarized in Table 5.

The Department will consider the following values when evaluating the historical use of Provisional Permit Nos. 76N 81519-00, 76N 85780-00, 76N 97278-00, and 76N 30016270 for the adverse effect criterion:

Tal	Table 5: Proposed Places of Use for the Water Rights Proposed for Change									
Water Right Number	Historical Purpose	Historical Places of Use	Historical Points of Diversion	Maximum Historical Flow Rate (GPM)	Historically Consumed Volume (AF)	Historically Diverted Volume (AF)				
76N 81519-00				110.00	4.89	48.90				
76N 85780-00	M	C T-1	-1- O	210.00	10.43	104.32				
76N 97278 - 00	Municipal	See Tal	oie Z	440.00	2.60	25.98				
76N 30016270				688.50	19.81	198.10				

Review

This document has been reviewed by the Department on March 20, 2025.

References

Department Standard Practice for Determining Historical Use



Groundwater Change Technical Analyses Report- Part B

Department of Natural Resources and Conservation (DNRC) Water Resources Division

Evan Norman, Groundwater Hydrologist, Water Sciences Bureau (WSB)

Applicant	Salish Shores Utility Corp.	Point of Diversion Legal Land Description	NW ¹ / ₄ Section 15, Township 21North, Range 29 West
Application No.	76N 30165123		

Overview

This report is Part B of a two-part publication which analyzes data submitted by the Applicant in support of the above-mentioned water right change application. This report provides technical analyses as required under the Administrative Rules of Montana (ARM) 36.12.1303 in support of the water rights criteria assessment as required in §85-2-402, Montana Code Annotated (MCA).

This Groundwater Change Technical Analyses Report – Part B contains the following sections:

Overview	1
1.0 Executive Summary	2
2.0 Hydrogeologic Setting	4
3.0 Drawdown and Yield Test Summary	5
4.0 Aquifer Properties	6
5.0 Adequacy of Diversion Analysis	7
6.0 Adverse Effect Analyses	9
6.1 Adverse Effect Groundwater - Drawdown in Existing Wells	9
6.2 Adverse Effect Surface Water - Net Depletions (Consumed Water)	13
Review	17
References	17



1.0 Executive Summary

Application Details

The Applicant proposes to add a point of diversion (POD) and change the place of use (POU) for Provisional Permit Nos. 76N 81519-00, 76N 85780-00, 76N 97278-00, and unperfected Permit No. 76N 30016270. A previous Change Authorization No. 76N 30027719 added an additional POD to the existing permits for a total of 7 wells. The proposed change would add one well to the existing municipal water supply system for a total of 8 wells and change the POU to include the entire Salish Shores water service area near Thompson Falls, Sanders County, Montana.

Information provided by the Applicant shows that four (Montana Bureau of Mines and Geology (MBMG) Groundwater Information Center (GWIC) IDs 135335, 131977, 175584, 175632) of the 7 existing wells are the primary Production Wells for the service area. Therefore, the existing (historical) pumping schedule was apportioned to four wells (**Table 6**), with the proposed pumping schedule apportioned to 5 wells (**Table 7**), including GWIC ID 76372. The redundant wells, GWIC IDs 139319, 139318, and 175585 were not assigned proportions of historical or proposed pumping volumes. The list of wells, including well depth and estimated capacity is shown in **Table 1**. The total flow rate and volume proposed for change is 1,448.5 gallons per minute (gpm) and 377.4 acre-ft (AF) per year for municipal purpose with a period of diversion and period of use from January 1 to December 31.

Table 1: PODs for Change Application No. 76N 30165123.

GWIC ID	Well Depth (ft, btc)	Estimated Capacity (gpm)
135335	121	246.0
131977	141	245.0
139319	240	427.0
139318	246	307.0
175584	367	160.0
175632	355	240.0
175585	423	75.0
76372 (proposed)	303	167.5

Approved Variances from ARM 36.12.121

No variances were required from ARM 36.12.121.

WSB Technical Findings

Based on information submitted, the WSB estimated aquifer properties, evaluated the production well(s) available water column, and evaluated potential impacts to existing groundwater and surface water rights. Adverse effects were evaluated by comparing drawdown in existing wells, net depletions to surface water for existing and proposed conditions. These analyses are in support of the following criteria assessment: adequacy of diversion and adverse effect. A summary of WSB findings described in subsequent sections are listed below.



TECHNICAL ANALYSES FINDINGS

	TECHNICAL ANALTSES FINDINGS
AQUIFER TEST ANALYSIS	An aquifer Transmissivity (T) of 6,750 ft²/day, Storativity (S) of 1.7 x 10 ⁻⁴ , and leakage parameter (β) of 0.14 from information in Provisional Permit No. 76N 30016270 and Geomatrix Consultants, Inc. (2005) are recommended for aquifer properties.
ADEQUACY OF DIVERSION	The proposed well using the Hantush (1960) early-time solution, a T of $6,750 \mathrm{ft^2/day}$, S of 1.7×10^{-4} , β of 0.14 and the monthly pumping schedule identified in Table 5 would experience 2.9 feet (ft) of drawdown after the first year, leaving approximately 256.8 ft of available water column above the bottom of the well.
ADVERSE EFFECT (DRAWDOWN IN EXISTING WELLS)	After five years, assuming wells are pumped according to Applicant provided schedule, no new groundwater rights in the source aquifer are predicted to experience drawdown greater than or equal to one foot.
ADVERSE EFFECT (NET DEPLETION TO SURFACE WATER)	The Clark Fork River, starting at the eastern boundary of NENW of Section 22, Township 21 North, Range 29 West, is identified as being hydraulically connected to the source aquifer. Monthly net depletions resulting from the historical and proposed conditions are identified in Table 2 and the starting point of net depletions in Figure 6 . The depth of the wells and semi-confining unit cause net depletions to be dampened resulting in a constant year-round depletion. No change in the rate, timing, and location of net depletions to surface water would occur because of the proposed change.



Table 2: Net depletion to the Clark Fork River under historical and proposed conditions and net effect from the proposed change.

Month	Historical and Proposed Consumed Volume (AF)	Historical Net Depletion (gpm)	Proposed Net Depletion (gpm)	Net Effect (gpm)
January	3.2	23.4	23.4	0.0
February	2.9	23.4	23.4	0.0
March	3.2	23.4	23.4	0.0
April	3.1	23.4	23.4	0.0
May	3.2	23.4	23.4	0.0
June	3.1	23.4	23.4	0.0
July	3.2	23.4	23.4	0.0
August	3.2	23.4	23.4	0.0
September	3.1	23.4	23.4	0.0
October	3.2	23.4	23.4	0.0
November	3.1	23.4	23.4	0.0
December	3.2	23.4	23.4	0.0
Total	37.7			

2.0 Hydrogeologic Setting

As identified in **Figure 1**, the proposed well (GWIC ID 76372) is approximately 0.6 miles from the Clark Fork River. The well is completed 303 ft below ground surface (bgs) with a pre-test static water level (swl) of 44.55 ft below top of casing (btc). The proposed well will be one of eight wells, all completed in glacial-lake deposits which represent a leaky-confined to confined aquifer system. The well log of GWIC ID 76372 (112DRFT) describes coarse gravelly alluvium assumed to be a glacial flood deposit unit connected to the Clark Fork River, above glacial-lake deposits of fine sand, clay with sand; and gravel, sand, and clay (Lonn et al., 2007).

The shallow Quaternary aged alluvial aquifers are recharged by local streams, groundwater recharge from the Clark Fork River, and by infiltration of precipitation. The deep Pleistocene aged alluvial aquifer is recharged by mountain front recharge and losses from streams along the shallow alluvium. The groundwater flow direction is parallel to the Clark Fork River from southeast to the northwest. The width of the Clark Fork River alluvium varies throughout the watershed and is approximately 1.3 miles wide at the proposed change location. The source aquifer discharges to springs and seeps along valley bottoms and reaches of streams that interact with groundwater. The alluvial aquifer is bounded by Precambrian-aged Belt Supergroup sedimentary rock including formations of metasediments (Kendy and Tresch, 1996).



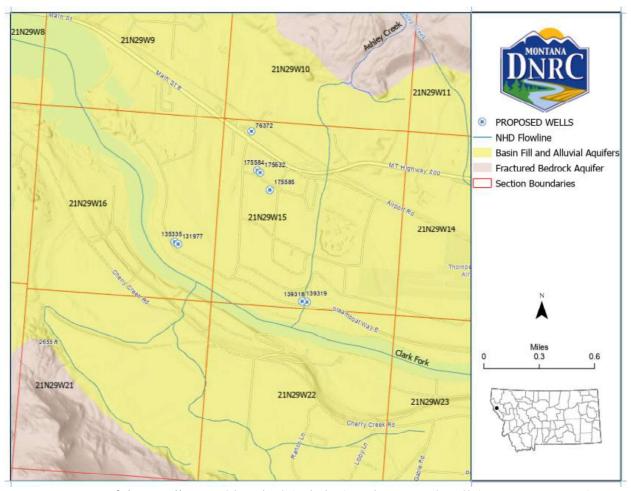


Figure 1: Map of the Applicant's historical (existing) and proposed well (GWIC ID 76372).

3.0 Drawdown and Yield Test Summary

A "Drawdown and Yield Test" is a pumping test that is meant to evaluate well construction and the ability of the aquifer to yield water to the well. This is also known as demonstrating "adequacy of diversion". The minimum duration of these tests is 8-hours. Observation Wells, pre-test, and post-test data is not required for Drawdown and Yield Tests.

Field Methods and Equipment

An 8.1-hour drawdown and yield test was performed on GWIC ID 76372. Water levels during the test were collected using LevelTroll 700 electronic pressure transducers and verified with manual e-tape measurements. The discharge was measured with a MasterMeter Octave in-line 3" ultrasonic flowmeter.

Background Data

Background data is not required as part of drawdown and yield tests and was not collected.



Drawdown and Recovery Data

The 8.1-hour drawdown and yield test started on October 4, 2023, at 4:19 P.M. on GWIC ID 76372 and is considered (t=0) for the computation of drawdown. The test had an average discharge of 167.5 gpm, with minimum and maximum discharge rates of 161.0 and 176.0 gpm, respectively. The maximum drawdown in GWIC ID 76372 was 32.91 ft below the swl of 44.55 ft btc, leaving approximately 226.7 ft above the bottom of the well. Recovery water level data is not required as part of drawdown and yield tests, however, the Applicant provided approximately 10 minutes of recovery data after the cessation of pumping.

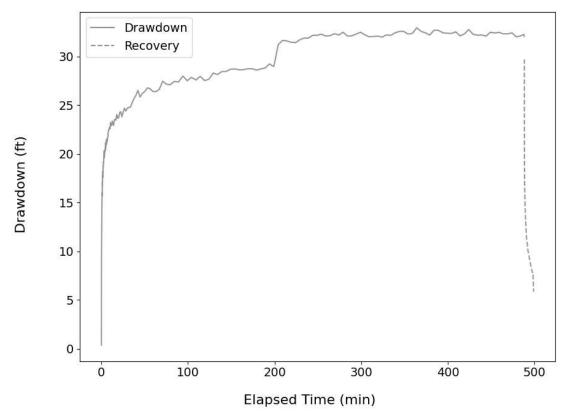


Figure 2: Drawdown and yield test including recovery measurements for Production Well, GWIC ID 76372.

4.0 Aquifer Properties

An "Aquifer Test" is a pumping test that is meant to provide data to model aquifer properties. The minimum duration of these tests is either 24-hours or 72-hours, depending on the proposed flow rate and volume (ARM 36.12.121(3)(e)), and DNRC only requires one of these tests per application. In lieu of submitting an aquifer test on the proposed well the Applicant submitted aquifer testing and aquifer property information from Provisional Permit No. 76N 30016270 Geomatrix Consultants, Inc. (2005). A summary of aquifer properties derived from aquifer testing on existing municipal wells is shown in **Table 3**.



Table 3: Aquifer tests analysis summary for GWIC ID 135335 and 139319.

Production Well (GWIC ID)	Observation Well (GWIC ID)	Solution	T (ft ² /day)	S	Duration (hrs)	Pumping Rate (gpm)
135335	131977	Hantush-Jacob	6,594	7.0E-5	72.0	246.0
139319	139318	Hantush-Jacob	5,366	2.7E-4	74.0	427.0

The recommended T of 6,750 ft²/day utilized in Provisional Permit No. 76N 30016270, was calculated with the average horizontal hydraulic conductivity of 30 ft per day from aquifer tests performed on GWIC ID 135335 and GWIC ID 139319. The saturated thickness of 225 ft used to calculate T was estimated based on drillers well logs and Herrick (2005). The recommended S of 1.7×10^{-4} is from the average of data from Observation Wells, GWIC ID 131977 and GWIC ID 139318 (**Table 3**).

The aquifer properties in Geomatrix Consultants, Inc. (2005) were derived from the Hantush-Jacob (1955) leaky-confined aquifer solution which does not consider aquitard storage. The Hantush-Jacob (1955) solution and Hantush (1960) leaky-confined complete solutions also assume infinite constant head source plane source above the aquitard. Therefore, the Hantush (1960) leaky-confined early-time solution was chosen for forward modeling using a leakage parameter described below.

The leakage parameter (β) was calculated (**Eq. 1**) using the recommended T of 6,750 ft²/day, an average aquitard thickness of 200 ft, and vertical hydraulic conductivity of the aquitard (K') of 0.1 ft per day from Geomatrix Consultants, Inc. (2005) which represents sandy silts (Fetter, 1994) and very fine sand, silt, loess or loam (Bear, 1972) primarily described in well logs. The radial distance from the pumping well to observation well (r) was represented with the radius of the pumping well. The recommended β of 0.14 is within the range of recommended values from Kruseman and de Ridder (1991).

$$\beta = \frac{r}{B} = \frac{r}{\sqrt{\frac{T \cdot b'}{K'}}}$$
 Eq. 1

Aquifer Property Comparison

The two aquifer tests performed on GWIC ID 135335 and 139319 are the only aquifer properties within the region of Application No. 76N 30165123, therefore, no additional tests were used as comparison for aquifer properties.

5.0 Adequacy of Diversion Analysis

An evaluation of the potentially available water column remaining in the Production Well is modeled using the Hantush (1960) early-time solution, with a T of 6,750 ft²/day, S of 1.7 x 10^{-4} and β of 0.14. Predicted theoretical drawdown for the proposed well is modeled for the period of diversion using the monthly pumping schedule identified in **Table 4**. The Applicant requests a volume of 8.3 AF for the proposed well. Applicant-provided water use records were used to distribute the volume to the proposed well and existing wells.



Table 4: Applicant provided monthly pumping schedule for municipal purposes.

Month	Proposed Well Diverted Volume (AF)	Proposed Well Diverted Flow Rate (gpm)	All Wells Diverted Volume (AF)	All Wells Diverted Flow Rate (gpm)
January	0.3	2.1	13.1	95.9
February	0.4	2.8	15.9	128.3
March	0.4	3.0	18.4	134.5
April	0.6	4.5	26.9	202.6
May	0.9	6.3	38.8	283.2
June	1.2	9.0	53.8	405.9
July	1.0	7.2	44.6	325.4
August	1.5	10.7	66.5	485.5
September	0.8	5.9	35.3	266.5
October	0.7	5.3	32.8	239.5
November	0.4	3.1	18.3	138.2
December	0.3	2.1	12.9	94.2
Total	8.3		377.4	

As identified in **Table 5**, total drawdown is the sum of interference drawdown and predicted drawdown with well loss. Well loss is calculated by dividing the predicted theoretical maximum drawdown by a well efficiency value. Well efficiency is calculated by dividing the modeled maximum drawdown for the aquifer test by the maximum observed drawdown of the drawdown and yield test. The aquifer adjacent to the proposed well would experience a predicted total drawdown of 0.3 ft at the end of August of the first year of pumping (**Figure 3**). The remaining available water column for the proposed well is 256.8 ft and is equal to the available drawdown above the bottom of the well minus total drawdown. The saturated thickness (b) of 260 ft (**Figure 3**; **Table 5**) is the calculation of the approximate available drawdown above the bottom of the well.

Table 5: Remaining available water column for the proposed well.

Drawdown Estimate	Proposed Well (GWIC ID 76372)
Total Depth at Bottom of Well (ft btc) ¹	304.0
Pre-Test Static Water Level (ft btc)	44.35
Available Drawdown Above Bottom of Well (ft)	259.7
Observed Drawdown of Aquifer Test (ft)	32.9
Modeled Drawdown Using Mean Aquifer Test Rate (ft)	3.1
Well Efficiency (%)	9.4
Predicted Theoretical Maximum Drawdown (ft)	0.3
Predicted Drawdown with Well Loss (ft)	2.9
Interference Drawdown (ft)	0.0
Total Drawdown (ft)	2.9
Remaining Available Water Column (ft)	256.8

¹The total well depth measuring point (bgs) was adjusted to the top of well casing based on a 1-foot well casing stickup reported on the well log.



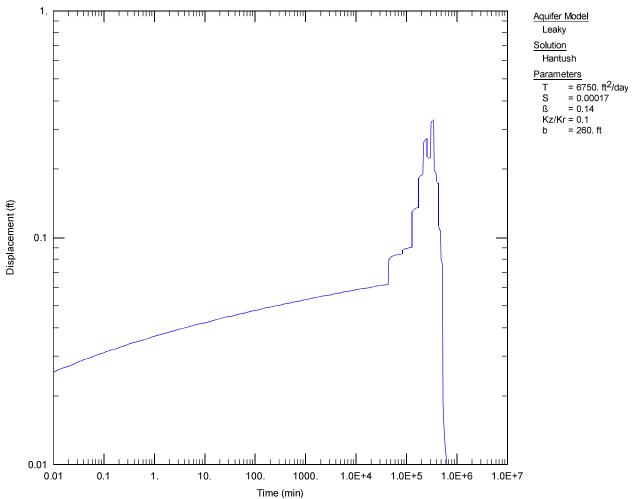


Figure 3: Hantush (1960) solution time-drawdown plot using the assumed pumping schedule for the proposed well (Column 3, Table 4).

6.0 Adverse Effect Analyses

Under §85-2-402, Montana Code Annotated (MCA), using the Applicant's proposed pumping schedule and associated volume, adverse effect is evaluated by modeling drawdown in nearby wells and changes in net depletions to surface water.

6.1 Adverse Effect Groundwater - Drawdown in Existing Wells

Drawdown in existing wells was modeled for existing and proposed conditions with the Hantush (1960) early-time solution, a T of 6,750 ft²/day, S of 1.7 x 10^{-4} , β of 0.14, and the monthly pumping schedules identified in **Table 6** and **Table 7** for a period of five years. The Applicant provided water use records in 2023 and 2024 which reflects approximate monthly use shown in **Table 6** and **Table 7**.

Due to the proximity of GWIC ID 135335 and 131977, and GWIC ID 175584 and 175632, the monthly pumping schedules were modeled as centroids between each well pair. The maximum



drawdown at the end of August of the fifth year of pumping under existing conditions (**Table 6**) show maximum drawdown at the centroid of the well pairs (**Figure 4**). The maximum drawdown at the end of August of the fifth year of pumping under proposed conditions (**Table 7**) show maximum drawdown at the centroid of the well pairs and the proposed well (GWIC ID 76372) (**Figure 5**).

Table 6: Monthly pumping schedules for existing wells.

Month	GWIC ID 135335 and 131977 (gpm) GWIC ID 175584 and 174632 (gpm)		Total pumping schedule (gpm)	Total pumping volume (AF)	
January	71.6	24.4	95.9	13.1	
February	95.7	32.6	128.3	15.9	
March	100.3	34.2	134.5	18.4	
April	151.1	51.5	202.6	26.9	
May	211.3	71.9	283.2	38.8	
June	302.8	103.1	405.9	53.8	
July	242.8	82.7	325.4	44.6	
August	362.2	123.3	485.5	66.5	
September	198.8	67.7	266.5	35.3	
October	178.7	60.8	239.5	32.8	
November	103.1	35.1	138.2	18.3	
December	70.3	23.9	94.2	12.9	
Total				377.4	

Table 7: Monthly pumping schedules for proposed wells.

Month	GWIC ID 135335 and 131977 (gpm)	GWIC ID 175584 and 174632 (gpm)	GWIC ID 76372 (gpm)	Total pumping schedule (gpm)	Total pumping volume (AF)
January	70.0	23.8	2.1	95.9	13.1
February	93.6	31.9	2.8	128.3	15.9
March	98.1	33.4	3.0	134.5	18.4
April	147.8	50.3	4.5	202.6	26.9
May	206.6	70.3	6.3	283.2	38.8
June	296.1	100.8	9.0	405.9	53.8
July	237.4	80.8	7.2	325.4	44.6
August	354.2	120.6	10.7	485.5	66.5
September	194.5	66.2	5.9	266.5	35.3
October	174.7	59.5	5.3	239.5	32.8
November	100.8	34.3	3.1	138.2	18.3
December	68.7	23.4	2.1	94.2	12.9
Total					377.4



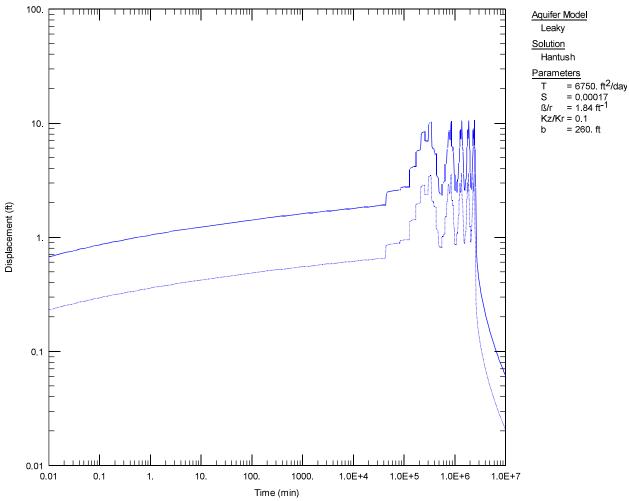


Figure 4: Hantush (1960) solution modeled time-drawdown plot using the Applicant-provided monthly pumping schedule for the existing wells (solid line: well pair GWIC IDs 135335 and 131977; dashed line: well pair GWIC IDs 175584 and 175632).



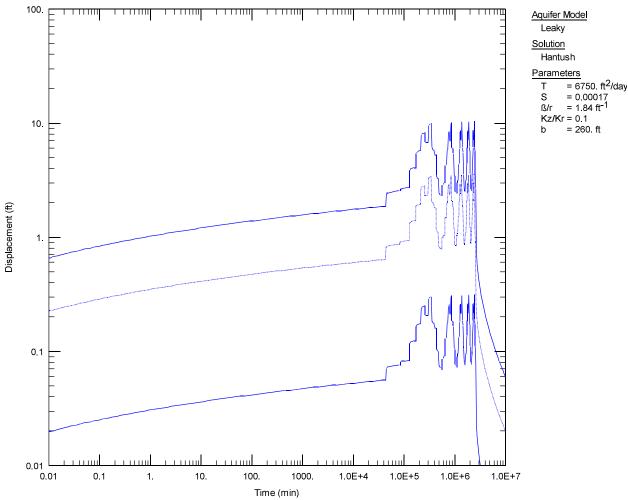


Figure 5: Hantush (1960) solution modeled time-drawdown plot using the Applicant provided monthly pumping schedule for the proposed wells (upper solid line: well pair GWIC IDs 135335 and 131977; dashed line: well pair GWIC IDs 175584 and 175632; lower solid line: GWIC ID 76372).

Using the Applicant-provided monthly pumping schedule, the one-foot drawdown contour for well pair GWIC ID 135335 and 131977 extends approximately 50 ft from the centroid of the two wells. The one-foot drawdown contour for well pair GWIC ID 175584 and 175632 extends approximately 15 ft from the centroid of the two wells. No existing water rights are within the modeled one-foot contour for either existing well pair.

With the addition of the proposed well, using the Applicant provided monthly pumping schedule, the one-foot drawdown contour for well pair GWIC ID 135335 and 131977 reduces to approximately 40 ft from the centroid of the proposed wells. The one-foot drawdown contour reduces to approximately 10 ft from well pair GWIC ID 175584 and 175632. The proposed well, GWIC ID 76372, has a maximum drawdown extent of approximately 0.3 ft. No water rights are within the modeled one-foot contour for either existing well pair or the proposed well.



6.2 Adverse Effect Surface Water - Net Depletions (Consumed Water)

Net depletion is equal to the consumed volume for a proposed groundwater use and is described as the calculated volume, rate, timing, and location of reductions to surface water that are offset by return flows (non-consumed water) from the place of use. Net depletion is evaluated by 1.) quantifying the consumed volume associated with the proposed use; 2.) identifying hydraulically connected surface waters; and 3.) calculating the monthly rate and timing of depletions to affected surface water(s).

1. Consumed Volume

Consumed groundwater does not return to the source aquifer. Consumed volume depends on the proposed use and its associated percentage of known consumption. Depletion is assumed to be equivalent to consumption on an annual basis unless return flows do not accrete to the potentially affected surface water.

Monthly consumption for irrigation is based on the net irrigation requirement calculated using the USDA Natural Resources Conservation Service (NRCS) Irrigation Water Requirements (IWR) program with inputs consistent with DNRC consumptive use rules in ARM 36.12.1902. Monthly consumption for irrigation of turf grass (lawns) is based on the net irrigation requirement from IWR with the following inputs for pasture grass and sprinkler irrigation:

- dry year
- have IWR re-calculate start and end date using default temperature
- 1-inch net irrigation application
- 0.25-inches of carryover moisture at the beginning and end of growing season.

Consumption for domestic or institutional purposes listed in **Table 8** are based on the results of studies by Kimsey and Flood (1987), Vanslyke and Simpson (1974), and Paul, Poeter, and Laws (2007).

Table 8: Percent consumption for domestic use by wastewater disposal/treatment method.

Wastewater Treatment/Disposal	Consumed
Individual drain fields	10%
Central treatment facility with minimal consumption	5%
Evaporation basin or land application	100%

For the subject application, the historical and proposed uses include municipal purposes with individual drain fields. Following DNRC standards, the total annual consumed volume is equal to 37.7 AF.

2. Hydraulically Connected Surface Water(s)

Net depletions to surface water depend on propagation of drawdown to locations where surface water is hydraulically connected to groundwater, the hydraulic properties of an aquifer, and is not a function of groundwater flow rate or direction (Theis, 1938; Leake, 2011). Hydraulic connection depends on the depth to groundwater beneath the beds of surface waters and can vary along a reach





and with time of year. Drawdown from pumping can propagate through the entire thickness of the confining layer to overlying aquifers or surface waters (Konikow and Neuzil, 2007).

Per DNRC (2018) hydraulic connection of individual stream reaches to groundwater is evaluated by comparing streambed elevations to static groundwater elevations measured in wells less than 50 ft deep and within 1,000 ft of surface water or from published water table maps. Surface water within that area is considered hydraulically connected to the unconfined aquifer if static groundwater elevations are above or within 10 ft of the elevation of the stream bed. Hydraulic connection of a confined aquifer to surface water is based on information such as the continuity and thickness of a confining layer and whether overlying shallow unconfined aquifers are connected to surface water (DNRC, 2018).

The Clark Fork River near the proposed and existing wells is classified as perennial per the USGS National Hydrographic Dataset (NHD) and is approximately 600 ft from the Applicant's PODs. Shallow wells near the project location, north of the Clark Fork River, that meet the criteria for DNRC (2018) include GWIC ID 134163 in Section 23, Township 21 North, Range 29 West, (**Figure 6**) and GWIC IDs 76359 and 132636 in Section 9, Township 21 North, Range 29 West. Based on information from well logs with shallow static water levels upgradient and downgradient of the proposed wells, the adjacent terraces and steep banks which may cause a greater river incision depth into sediments of the shallow alluvium, and the ability of the aquitard to transmit water under the vertical hydraulic conductivity (K') as shown in **Eq. 1**, the Clark Fork River is considered hydraulically connected to the source aquifer.

Further, Provisional Permit No. 76N 30016270 identified the Clark Fork River as hydraulically connected and modeled depletions to it. Ashley Creek, a nearby surface water body, is approximately 3,100 ft from proposed well GWIC ID 76372. Ashley Creek is noted as intermittent in NHD and aerial imagery shows no defined stream channel. No wells less than 50 ft deep with shallow static groundwater elevations are mapped within the vicinity of Ashley Creek. As such, Ashley Creek was not considered a hydraulically connected source.



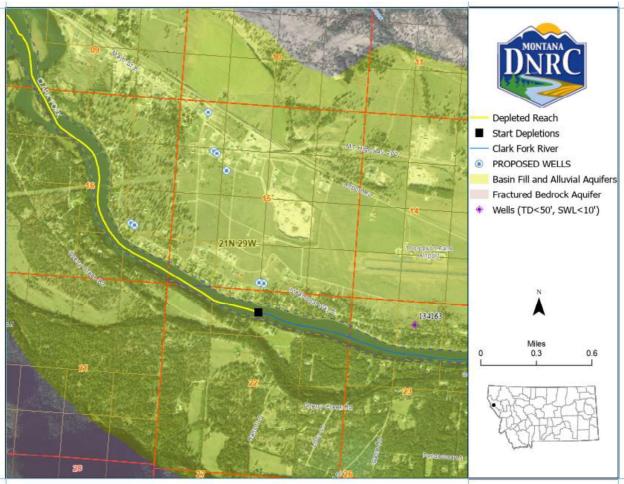


Figure 6: Proposed well and historical and proposed starting point of net depletions on the Clark Fork River.

3. Rate and Timing of Depletions

Evaluations of the rate and timing of depletions caused by pumping are based on the basic concept that groundwater pumping eventually is offset by an equivalent increase in recharge or decrease in discharge (Theis, 1940; Leake et al., 2008), a process defined as capture by Lohman (1972). Capture occurs as drawdown propagates to surface water and areas of phreatophyte vegetation that takes water directly from groundwater. In the absence of credible evidence to the contrary, capture of ET by phreatophytes is neglected and net depletion is assumed to equal total capture. This assumption is justified because published estimates for conditions common in Montana alluvial valleys indicate capture of ET generally is less than 10 percent of total capture (Xunhong, 2006). Capture of ET in ephemeral drainages may be significant and will be evaluated on an application-by-application basis.

The rate and timing of net depletion caused by pumping may be modeled using a variety of analytical and numerical models selected to fit site-specific conditions and needs. Simple models including the Alluvial Water Accounting System (AWAS) and the Well Pumping Depletion Model





(WPDM) typically are used by DNRC to model depletions to one source with simple aquifer boundaries. Adjustments may be made for more complex conditions or multiple sources using methods like those described by Contor (2011), analytical models by Hunt (2003) and Butler et al. (2001) or a superposition numerical groundwater flow model.

Modeling is not necessary in some situations such as where a proposed use is constant year-round because of the depth to the source aquifer and a distance to potentially affected stream reaches. Modeling of depletions can be simplified if the proposed place of use is located the same relative distance from the potentially affected surface water as the proposed wells and all non-consumed water infiltrates the source aquifer and returns to the potentially affected surface water as return flows. Under those simplifying assumptions, depletion can be modeled based on withdrawal of the monthly consumed amounts. Otherwise, depletion by the full withdrawals and return flows need to be modeled separately with net depletion calculated as depletion minus return flows.

Net depletion caused by pumping the source aquifer primarily occurs as propagation of drawdown through the overlying confining layer to the affected reach of the Clark Fork River. As identified in **Table 2**, net depletion effects are expected to be dampened resulting in a constant year-round rate of depletion to Clark Fork River downstream of the eastern boundary of NENW¹/₄, Section 22, Township 21 North, Range 29 West.

The distance of the historical and proposed wells from the Clark Fork River, the similar distances along the length of the river, and similar completion depth of the existing wells and proposed well, results in no change to the location of net depletions and timing of net depletions (constant year-round). As identified in **Table 2**, the calculated historical and proposed annual net depletion volume of 37.7 AF to the Clark Fork River will result in monthly net depletion rates of 23.4 gpm.



Review

This document has been reviewed on March 12, 2025 in accordance with Category 7 of DNRC's Water Sciences Bureau Minimum Standards of Review, Version 2, February 2024.

References

Alluvial Water Accounting System (AWAS), 2003. Integrated Support System at Colorado State University, http://www.ids.colostate.edu/projects.php?project=awas.

Butler, J.J., Zlotnik, V.A., and Tsou, M.S., 2001. Drawdown and stream depletion produced by pumping in the vicinity of a partially penetrating stream. Ground Water 39 (5), 651–659.

Contor, B.A., 2011. Adaptation of the Glover/Balmer/Jenkins Analytical Stream-Depletion Methods for No-Flow and Recharge Boundaries, Idaho Water Resources Research Institute, Technical Completion Report, 15 p.

Fetter, C.W., Applied Hydrogeology, 1994, 3rd Edition, Prentice Hall, Upper Saddle River, New Jersey. Groundwater Information Center, 2022. Montana Bureau of Mines and Geology, http://mbmggwic.mtech.edu/.

Geomatrix Consultants, Inc. 2005. Hydrogeologic Summary Report Salish Shores Public Water Supply. 24 p.

Hantush, M.S. 1960. Modification of the theory of leaky aquifers, Jour. of Geophys. Res., vol. 65, no. 11, pp. 3713-3725.

Hantush, M.S. and C.E. Jacob. 1955. Non-steady radial flow in an infinite leaky aquifer, Am. Geophys. Union Trans., vol. 36, no. 1, pp. 95-100.

Herrick, J. F., 2005. Source Water Delineation and Assessment Report. Montana Department of Environmental Quality. Sanders County Water District. 45 p.

Hunt, B., 2003. Unsteady stream depletion when pumping from semi-confined aquifer. Journal of Hydrologic Engineering 8, no. 1: 12-19.

HydroSOLVE, Inc. 2007. AQTESOLV for Windows, v.4.5. written by G.M. Duffield, http://www.aqtesolv.com/.

Kendy, E., and R.E. Tresch. 1996. Geographic, Geologic, and Hydrologic Summaries of Intermontane Basins of the Northern Rocky Mountains, Montana: U.S. Geological Survey Water Resources Investigations Report 964025, 233 p.

Kimsey, D.W. and P.K. Flood, 1987. Domestic consumptive use, technical memorandum to the Chief Engineer of the State of Colorado, 16 p

Kruseman, GP, N.A. de Ridder. 1994. Analysis and Evaluation of Pumping Test Data (2nd ed.), Publication 47, Intern. Inst. for Land Reclamation and Improvement, Wageningen, The Netherlands, 370 p.



Konikow, L. F. and C. E. Neuzil, 2007. A method to estimate groundwater depletion from confining layers, Water Resources Research., 43, W07417, doi:10.1029/2006WR005597.

Leake, S. A., Pool, D. R., and Leenhouts, J. M., 2008. Simulated effects of ground-water withdrawals and artificial recharge on discharge to streams, springs, and riparian vegetation in the Sierra Vista Subwatershed of the Upper San Pedro Basin, southeastern Arizona: U.S. Geological Survey Scientific Investigations Report 2008-5207, 14 p. http://pubs.usgs.gov/sir/2008/5207/sir2008-5207.pdf.

Lonn, J.D., Smith, L.N., and McCulloch, R.B., 2007. Geologic map of the Plains 30' x 60' quadrangle, western Montana: Montana Bureau of Mines and Geology Open-File Report 554, 43 p., 1 sheet, scale 1:100,000.

Leake, S.A. 2011. Capture – rates and direction of groundwater flow don't matter! Groundwater, Vol. 49, No. 4, p. 456 – 458.

Lohman, S.W. 1972. Definitions of selected ground-water terms: Revisions and conceptual refinements, U.S. Geological Survey Water Supply Paper, 1988, 21 p., http://pubs.usgs.gov/wsp/wsp-1988/pdf/wsp-1988.pdf.

Lohman, S.W. 1972B. Ground-water hydraulics, U.S. Geological Survey Prof. Paper 708, page 70, http://pubs.er.usgs.gov/publication/pp708.

Paul, W., Poeter, E., and R Laws, 2007. Consumptive loss from and individual sewage disposal system in a semi-arid mountain environment. Colorado Water, Newsletter of the Water Center of Colorado State University, August/September 2007, Volume 24, Issue 4.

Theis, C.V. 1938. The significance and nature of the cone of depression in ground water bodies. Economic Geology 38,889–902.

Theis, C.V. 1940. The source of water derived from wells: Essential factors controlling the response of an aquifer to development. Civil Engineer 10: 277–280.

Vanslyke, G. and H. Simpson. 1974. Consumptive use of water by homes utilizing leach fields for sewage disposal, technical memorandum by the Colorado Division of Water Resources, 5 p.


Xunhong, C. 2006. Groundwater evapotranspiration captured by seasonally pumped wells in river valleys, Journal of Hydrology, V. 318, Issues 1-4, p. 334-347.


ATTACHMENT B

MAPS

B.1 – Question 17 Historical Use Map (Figure 1)

B.2 – Questions 18 and 32 Proposed Use Map (Figure 2)

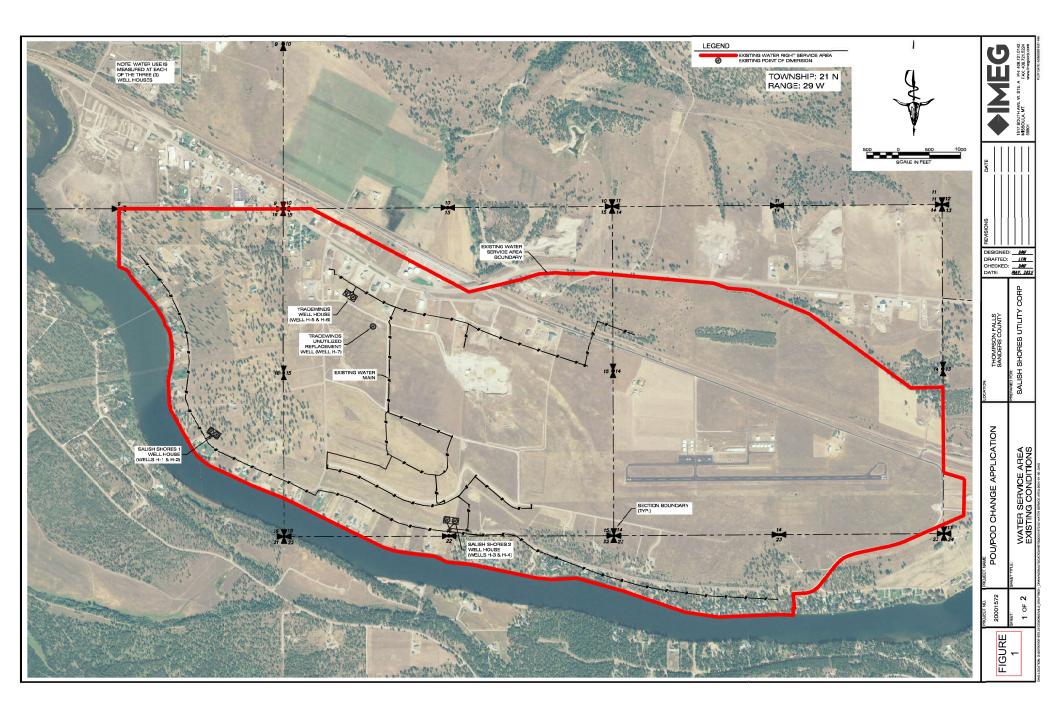

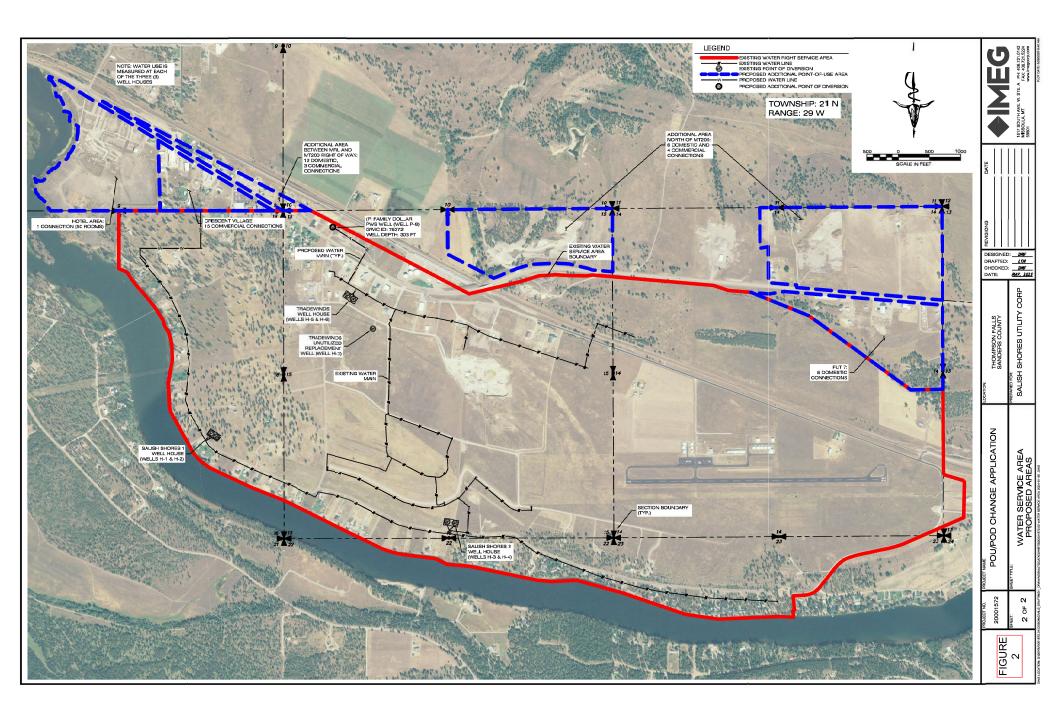

ATTACHMENT C

POINTS OF DIVERSION AND PLACE OF USE

C.1 – Question 19.a Existing and Proposed Points of Diversion

C.2 – Question 20.b **Proposed Place of Use Details**

C.1 – EXISTING AND PROPOSED POINTS OF DIVERION

Table 1: Salish Shores Points of Diversion

POD	1/4	1/4	1/4	Sec	Twp	Rge	County	Lot	Blk	Tr	Sub	New
ID ¹												
H1	SW	NE	SE	16	21N	29W	Sanders				Salish Shores	N
H2	SW	NE	SE	16	21N	29W	Sanders				Salish Shores	N
Н3	SW	SW	SE	15	21N	29W	Sanders	19A			Salish Shores 2	Ν
H4	SW	SW	SE	15	21N	29W	Sanders	19A			Salish Shores 2	Z
H5	NE	SW	NW	15	21N	29W	Sanders	12			Tradewinds Comm	Z
											Village Phase 2	
Н6	NE	SW	NW	15	21N	29W	Sanders	12			Tradewinds Comm	Z
											Village Phase 2	
H7 ²	NW	SE	NW	15	21N	29W	Sanders				COS 3942	N
P8	NE	NE	NW	15	21N	29W	Sanders	В			COS 2874	Υ

¹ H1-H7 = Historical or existing point of diversion ID; P8 = Proposed point of diversion.

²The Qtr Qtr Qtr Section description in DNRC records for H7 appears to be in error, the details presented in Table 1 are more accurate.

C.2 - MUNICIPAL PLACE OF USE (PROPOSED)

Table 2: Salish Shores Proposed Place of Use

1/4	1/4	Section	Township	Range	County
NE	SW	9	21 North	29 West	Sanders
SE	SW	9	21 North	29 West	Sanders
NW	SE	9	21 North	29 West	Sanders
SW	SE	9	21 North	29 West	Sanders
SE	SE	9	21 North	29 West	Sanders
SW	SW	10	21 North	29 West	Sanders
NE	NW	14	21 North	29 West	Sanders
NW	NE	14	21 North	29 West	Sanders
NE	NE	14	21 North	29 West	Sanders
SE	NW	14	21 North	29 West	Sanders
SW	NE	14	21 North	29 West	Sanders
SE	NE	14	21 North	29 West	Sanders
NE	SE	14	21 North	29 West	Sanders
NE	NE	15	21 North	29 West	Sanders
NW	NE	15	21 North	29 West	Sanders

ATTACHMENT D ADVERSE EFFECT

D.1 – Question 24 **Diversion Control**

D.2 – Question 25 Existing Water Right Protection

D.3 – Question 27 Calls for Water

D.1 – DIVERSION CONTROL

Should a call for water be made on the source aquifer by senior water right holders, the Applicant will promptly reduce pumping from the source of supply and implement water conservation practices for the system and its users.

D.2 – EXISTING WATER RIGHT PROTETCTION

During times of water shortage, existing (senior) water rights will be satisfied prior to the Applicant's diversion of water from the authorized points of diversion. Since many end users rely on the Salish Shores municipal water system and complete cessation of system water supply would create significant public health and safety issues, existing water right holders would be promptly contacted to identify water savings methods that reduce the cumulative impact to the source aquifer, while maintaining the basic minimal needs of all involved water users.

D.3 – CALLS FOR WATER

The proposed change in use would add an additional well point of diversion and expand the Salish Shores water service area (place of use). The Salish Shores PWS will otherwise continue to be operated as it has since the prior (2008) change authorization, wherein the system pump, conveyance, and monitoring program will be maintained and operated to serve all system users. The additional point of diversion and new places of use should in no way change the Applicant's ability to make a call for water as the system will generally operate as it has historically.

ATTACHMENT E

ADEQUATE MEANS OF DIVERSION AND OPERATION

- E.1 Question 33 Diversion Capacity
- E.2 Question 34 System Conveyance
 - **E.3** Question 35.a. **Easements**
 - E.4 Question 36 Plan of Operation

E.1 - DIVERSION CAPACITY

Wells H-1 & H-2:

Goulds 5CHC010 – 165 gpm @ 180' of TDH (calculated during 2011 full system analysis based on WaterCAD model). See pump curves at end of Attachment E.

Wells H-3, H-4, H-5, & H-6:

Goulds 150H10-4 – 220 gpm @ 140' of TDH (calculated during 2011 full system analysis based on WaterCAD model). See pump curves at end of Attachment E.

Wells H-7 & P-8:

Goulds 5CHC010 – 180 gpm @ 158' of TDH (theoretical because these are not currently connected into the system, but they have the same pump as H-1 and H-2 and both have roughly 22' higher static water levels than H-1 and H-2. See pump curves at end of Attachment E.

E.2 – SYSTEM CONVEYANCE

The existing and proposed Salish Shores water conveyance system will consist of 3-inch to 6-inch Class 200 PVC distribution lines. The total length of the water distribution system is approximately 30,000 ft. The system capacity is designed to handle the maximum combined flow rate of Salish Shores' water right permits (1,448 gpm).

E.3 – EASEMENTS

Easements may be needed to locate new main lines and service lines to system end users. Standard practices will be followed to establish any needed easements, and documentation can be provided to DNRC when available if requested by the Department.

E.4 – PLAN OF OPERATION

A 2008 change authorization (76N 30027719) consolidated all four Project water right permits into a single system as required by the Public Service Commission Master Development Plan. Following the change authorization, the permits have been operated and administered as supplemental municipal rights, physically manifold as one system, with all seven groundwater PODs having the capability of serving the entirety of the POU or service area. Prior to the 2008 authorization, each permit served smaller, stand-alone service areas that generally reflected the incremental, or phased, growth of Salish Shores.


The manifold system has primarily relied on four wells that serve as the main sources of water, with the other three wells serving as backups. Wells 1 and 2 are located in a well house (Salish Shores I) situated in the SWNESE Sec 16, T21N, R29W (Figures 1 and 2). Wells 3 and 4 are located in a well house (Salish Shores II) situated in the SWSWSE Sec 15, T21N, R29W. Wells 5 and 6 are located in a

third well house (Tradewinds) situated in the NESWNW Sec 15, T21N, R29W. The four wells located in the Salish Shores I and Tradewinds wellhouses are the primary sources of water. Well 7 is a stand-alone well also used for backup purposes, if needed, and is located in the NWSENW Sec 15, T21N, R29W (note that the Well 7 location currently on record with DNRC appears to be incorrect).

The proposed POD (Well 8) is located in NENENW Sec 15, T21N, R29W, will serve the Family Dollar Store on Montana Highway 200, in addition to providing redundancy to the larger Salish Shores system once connected to the distribution infrastructure.

WELLS 1 & 2_



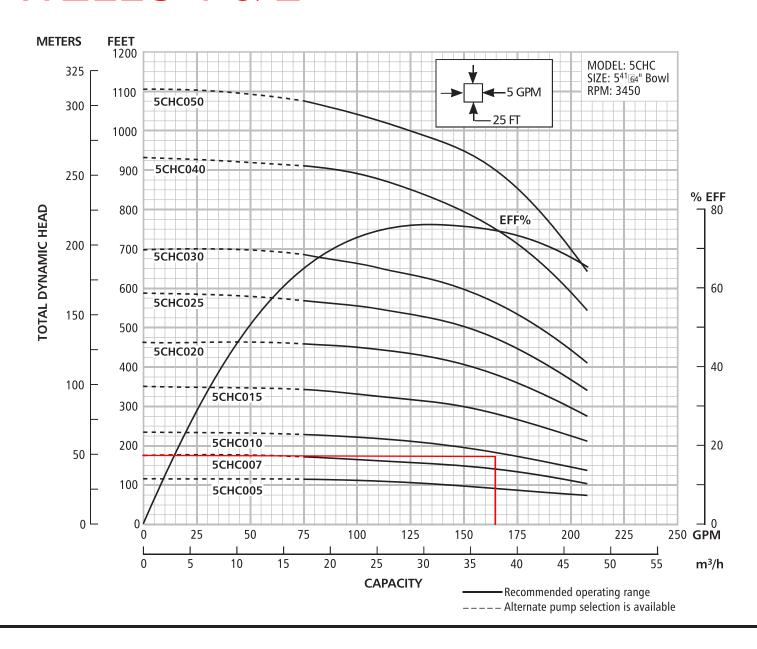

DIMENSIONS AND WEIGHTS


НР	Stages	W.E. Order Number	W.E. Length	W.E. Wt. (lbs.)
5	2	05CHC00544CTB	20.2	57
,	2	05CHC00564CTB	22.8	62
7.5	7.5 3	05CHC00744CTB	25.2	70
/.5		05CHC00764CTB	27.5	75
10	4	05CHC01064CTB	32.1	88
15	6	05CHC01564CTB	41.4	114
20	8	05CHC02064CTB	50.7	140
25	10	05CHC02564CTB	59.9	166
30	12	05CHC03064CTB	69.2	192
40	16	05CHC04064CTB	87.7	244
50	19	05CHC05064CTB	101.6	283

(All dimensions in inches and weights in lbs. Do not use for construction purposes.)

PLEASE NOTE:


- Order motors separately.
- For intermediate horsepower pumps consult factory.
- Solid line is recommended operating range. The dotted line (---) signifies an alternate pump selection is available.
- Please specify all options changes in W.E. order number.

4" NPT DISCHARGE MATERIALS OF CONSTRUCTION

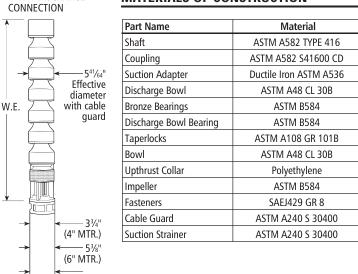

WELLS 3, 4, 5, & 6



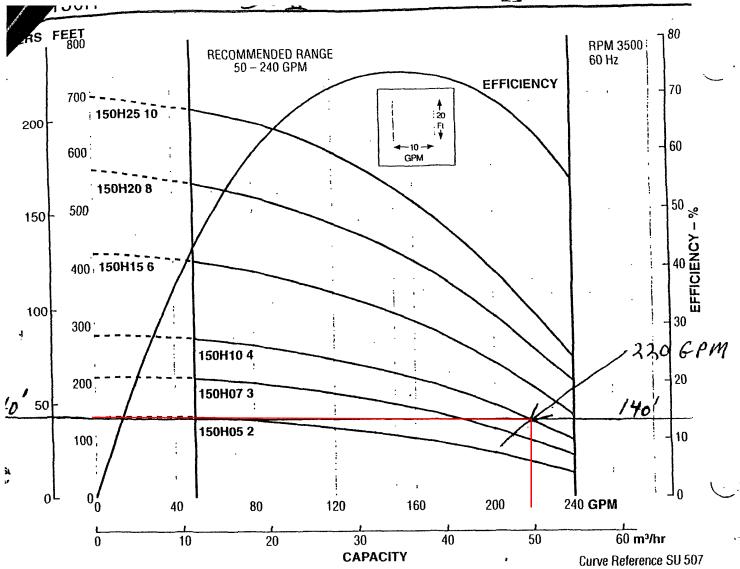


IMENSIONS AND WEIGHTS	

M	ENSIO	NS AND V			ir Diri Barilia			•												
IP S	Stages	W.E.	Motor Order	PH	Motor Volts	Motor Loth.	W.E. Lgth.	LOA	. Wt. (lbs.)	HP	Stages	W.E. Order	Motor Order: F No.	'H	Motor Volts	Motor Lgth.	W.E. Lgth.	LOA	Wt. (lbs.)	DISCHARGE 3' NPT
			S10940										· \$13970	-	230	33.1	39.3	72.4	255	5.82°
5	2	150H05 2	\$10978 \$10970 \$10975 \$10979	3	4230 460	23.5	18.0	41.5	95	15	6	150H15 6	\$13978 \$13971 \$13972 \$13979	3	200 230 460 575	28.0	39.3	67.3	229	guard 7
7.5	3	150H07 3	S11970 S11978 S11971 S11972	il.	200 230	· .,	24.3			20	8	150H20 8	\$14978 \$14971 \$14972 *\$14979	3	200 230 460 575	30.6	49.3	79.9		₩00 → 3%*
		. 3	\$11979 \$12970 \$12978	がは、一般は	575 230 200		. 29.3		215	25	10	150H25 10	\$15978 \$15971 \$15972 *\$15979	3	200 230 460 575	33.2	59.3	92.5	316	(4° MTR.) ← 5%°
10	4	150H10 4	\$12971 \$12972 \$12979	3	230 460	25.5	29,3		185											

All dimensions are in inches and weights in lbs. Do not use for construction purposes.)

WELLS 7 & 8 ₋



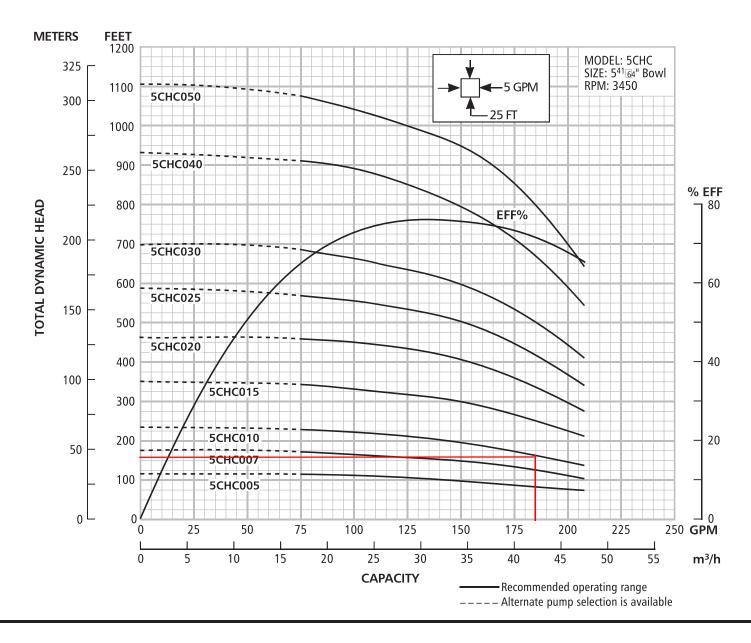

DIMENSIONS AND WEIGHTS

НР	Stages	W.E. Order Number	W.E. Length	W.E. Wt. (lbs.)
5	2	05CHC00544CTB	20.2	57
'	2	05CHC00564CTB	22.8	62
7.5	7.5 3	05CHC00744CTB	25.2	70
/.5		05CHC00764CTB	27.5	75
10	4	05CHC01064CTB	32.1	88
15	6	05CHC01564CTB	41.4	114
20	8	05CHC02064CTB	50.7	140
25	10	05CHC02564CTB	59.9	166
30	12	05CHC03064CTB	69.2	192
40	16	05CHC04064CTB	87.7	244
50	19	05CHC05064CTB	101.6	283


(All dimensions in inches and weights in lbs. Do not use for construction purposes.)

PLEASE NOTE:

- Order motors separately.
- For intermediate horsepower pumps consult factory.
- Solid line is recommended operating range. The dotted line (---) signifies an alternate pump selection is available.

• Please specify all options changes in W.E. order number.

4" NPT DISCHARGE MATERIALS OF CONSTRUCTION

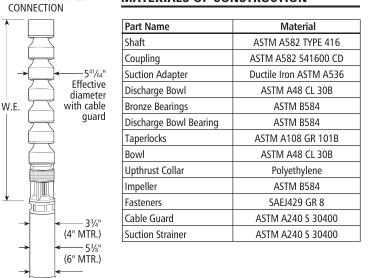

ATTACHMENT F BENEFICIAL USE

F.1 - Question 40.b. Municipal Beneficial Use

F.1 - MUNICIPAL BENEFICIAL USE (QUESTION 40.b.)

Salish Shores has ample unperfected water rights capacity to service additional areas with municipal water (see Permit No. 76N 30016270). Proposed water use will continue to fall under the multiple subpurposes that municipal water rights encompass (e.g., domestic, lawn and garden, commercial) and the amount of water Salish Shores is requesting to change is beneficial to the Thompson Falls community. The project completion notice will refine and provide more specific information regarding the fully perfected use.

Technical Analyses Report/ Scientific Credibility Review

- Departmental Technical Analyses Report/ Scientific Credibility Review
- Any correspondence relating to the Technical Analyses Report

Technical Analyses
Report /
Scientific Credibility
Review

THE MONTANA DEPARTMENT OF NATURAL RESOURCES AND CONSERVATION

GOVERNOR GREG GIANFORTE



DNRC DIRECTOR AMANDA KASTER

Water Resources Division – Kalispell Regional Office 655 Timberwolf Pkwy, Ste. 4 Kalispell, MT 59901-1215 (406) 752-2288 DNRCKalispellWater@mt.gov

March 20, 2025

SALISH SHORES UTILITY CORP INC PO BOX 1030 THOMPSON FALLS MT 59873-1030

Subject: Completed Technical Analyses Report for Change Preapplication No. 76N 30165123

Dear Applicant,

As designated on the submitted Preapplication Meeting Form per §85-2-302(3)(b), MCA, the Department of Natural Resources and Conservation (DNRC or Department) has completed the technical analyses for Change Preapplication No. 76N 30165123 based on the information provided in your Preapplication Meeting Form accepted by the Department on February 3, 2025. The technical analyses can be found in the attached report. Please note this Change Technical Analyses Report is a two-part publication, comprised of a Part A completed by Travis Wilson (Kalispell Regional Office), and a Part B completed by Evan Norman (Water Sciences Bureau).

This Technical Analyses Report **IS**: A collection of facts that the DNRC has gathered, including content provided in the Preapplication Meeting Form materials. The Department will use these data to analyze the criteria in §85-2-402, MCA if you submit an application for the project described in the completed Preapplication Meeting Form.

This Technical Analyses Report IS NOT: An analysis or discussion of whether the Preapplication Meeting Form as filed meets the criteria (§85-2-402, MCA).

You have 180 days to submit the Water Right Change Application Form 606 considering the information provided in the technical analyses and Preapplication Meeting Form. If the Application Form is not submitted to the Kalispell Regional Office by September 16, 2025, a new preapplication meeting will be required to process the Application with expedited timelines (ARM 36.12.1302(6)(b)). If any details described in the submitted Application are changed from that of the submitted Preapplication Meeting Form, the discounted filing fee and expedited timelines will not apply (ARM 36.12.1302(6)(a)). Please note that the technical analyses will expire one year from the date of this letter (ARM 36.12.1302(8)).

If you have any questions, please contact me at (406) 752-2746 or Travis. Wilson@mt.gov.

Sincerely,

Travis Wilson

Water Resource Specialist

Kalispell Regional Water Resource Office

Encl.: Groundwater Change Technical Analyses Report Parts A-B

Cc via email: Bryan Gartland, Aspect Consulting





Groundwater Change Technical Analyses Report – Part A

Department of Natural Resources and Conservation (DNRC or Department) Water Resources Division

Travis Wilson, Water Resources Specialist, Kalispell Regional Office

Application No.	76N 30165123	Proposed Point of Diversion	NENWNW of Sec 15, Twp 21N, Rge 29W, Sanders County			
Applicant	icant Salish Shores Utility Corp Inc.					

Overview

This report is Part A of a two-part publication which analyzes data submitted by the Applicant in support of the above-mentioned water right application. This report provides technical analyses as required under the Administrative Rules of Montana (ARM) 36.12.1303 in support of the water rights criteria assessment as required in §85-2-402, Montana Code Annotated (MCA).

This Groundwater Change Technical Analyses Report – Part A contains the following sections:

Overview	. 1
Variances	. 1
1.0 Application Details	. 1
2.0 Historical Use Analysis	5
2.1 Summary of Historical Use	5
Review	5
References	. 5

Variances

No variances were required from ARM 36.12.121.

1.0 Application Details

The Applicant proposes to add an eighth point of diversion (POD) to the Salish Shores water system and to change the place of use to cover the full projected Salish Shores water service area. No additional flow rate or volume is requested or required to supply the expanded service area. The project is in Sanders County and the source is groundwater. This change involves Provisional Permit Nos. 76N 81519-00, 76N 85780-00, 76N 97278-00, and 76N 30016270, which are the water rights serving the manifold Salish Shores water system. The details of these existing water rights are summarized in Tables 1 and 2. These water rights were previously changed by unperfected water right Change Application No. 76N 30027719. Provisional Permit Nos. 76N 81519-00, 76N 85780-00, and 76N 97278-00 are perfected permits, while Provisional Permit No.



76N 30016270 is unperfected. The proposed eighth POD and proposed new places of use are summarized in Tables 3 and 4, respectively.

	Table 1: Summary of Water Rights Proposed for Change										
Water Right Number	Priority Date	Purpose	Flow Rate (GPM)	Volume (AF)	Period of Diversion & Use	Means of Diversion	Points of Diversion	Places of Use			
76N 81519-00	May 14, 1992		110.0	48.90			G				
76N 85780-00	June 1, 1993	Manuilain al	210.0	104.32	01/01 - 12/31	Wells (7x)	See Table 2 (same for all four provisional permits)				
76N 97278-00	May 17, 1996	Municipal	440.0	25.98							
76N 30016270	August 19, 2005		688.5	198.10							

Table 2: Summary of the Points of Diversion and Places of Use for the Water Rights Proposed for Change

The four provisional permit water rights proposed for change serve a manifold system and share all of the same points of diversion and places of use.

POD ID	GWIC ID	1/4	1/4	1/4	Section	Township	Range	County
1	135335	SW	NE	SE	16	21 N	29 W	Sanders
2	131977	SW	NE	SE	16	21 N	29 W	Sanders
3	139319	SW	SW	SE	15	21 N	29 W	Sanders
4	139318	SW	SW	SE	15	21 N	29 W	Sanders
5	175584	NE	SW	NW	15	21 N	29 W	Sanders
6	175632	NE	SW	NW	15	21 N	29 W	Sanders
7	175585	NE	SW	NW	15	21 N	29 W	Sanders
POU ID		1/4	1/4	1/4	Section	Township	Range	County
1					15	21 N	29 W	Sanders
2				E2	16	21 N	29 W	Sanders
3			W2	SW	13	21 N	29 W	Sanders
4					14	21 N	29 W	Sanders
5			N2	N2	22	21 N	29 W	Sanders
6			N2	N2	23	21 N	29 W	Sanders

,	Table 3: Proposed Point of Diversion for the Water Rights Proposed for Change										
GWIC ID	1/4	1/4	1/4	Section	Township	Range	County				
76372	NE	NW	NW	15	21 N	29 W	Sanders				



Ta	able 4: Pr	oposed P	laces of Use for	the Water Rights Prop	osed for Chang	ge
POU ID	1/4	1/4	Section	Township	Range	County
7	E2	SW	9	21 N	29 W	Sanders
8	W2	SE	9	21 N	29 W	Sanders
9	SE	SE	9	21 N	29 W	Sanders
10	SW	SW	10	21 N	29 W	Sanders
11	NE	NW	14	21 N	29 W	Sanders
12		NE	14	21 N	29 W	Sanders
13	SE	NW	14	21 N	29 W	Sanders
14	NE	SE	14	21 N	29 W	Sanders
15	N2	NE	15	21 N	29 W	Sanders

Note: These are the legal land descriptions of the proposed new places of use only. These will be combined with the existing places of use and summarized in their most simplified form to describe the place of use of the total Salish Shores service area in the official water right records. See Figure 2 for a breakdown of the existing and proposed places of use.

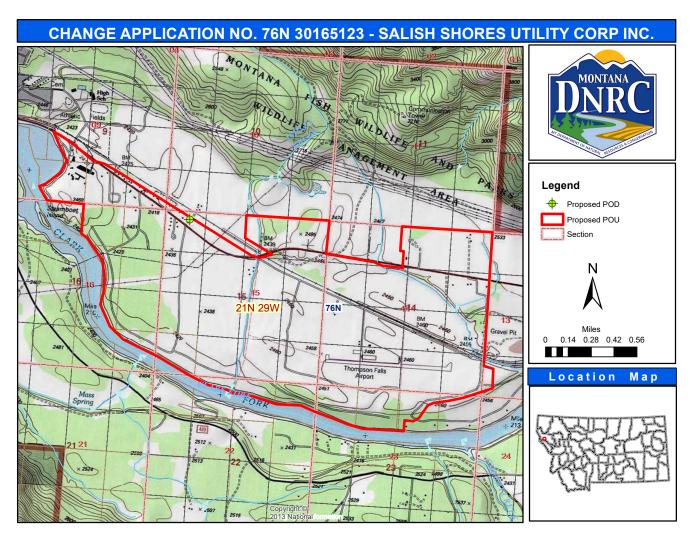


Figure 1: Project vicinity/overview map.



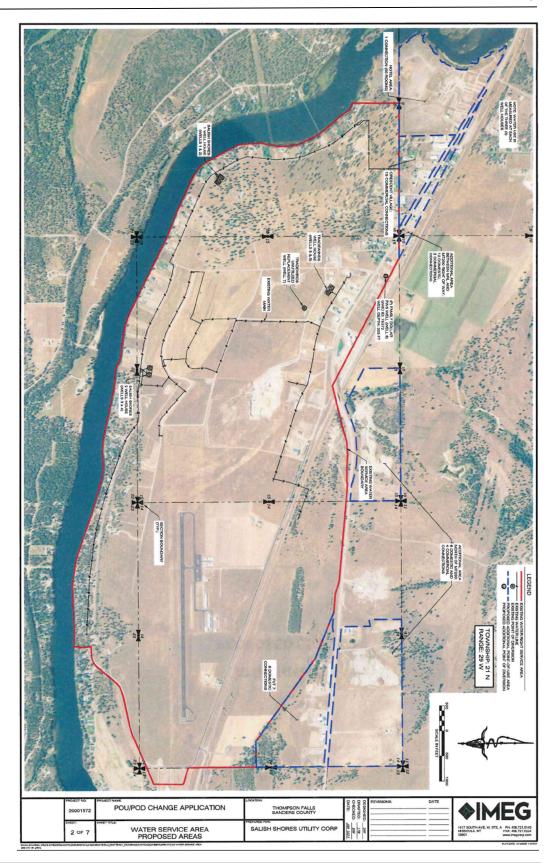


Figure 2. Map of the Applicant's proposed point of diversion, proposed place of use, existing/historical points of diversion, and historical place of use. The solid red outline delineates the existing place of use, while the dashed blue outlines delineate the proposed new places of use.



2.0 Historical Use Analysis

2.1 Summary of Historical Use

Provisional Permit Nos. 76N 81519-00, 76N 85780-00, 76N 97278-00, and 76N 30016270 were previously changed by unperfected water right Change Authorization No. 76N 30027719. These water rights are supplemental because they all share the same points of diversion and places of use. The historical use of these water rights was proven by the applicant and quantified by the DNRC in Change Authorization No. 76N 30027719. The applicant did not submit additional addenda or information with this application contradicting the Department's previous findings, therefore the DNRC will use the findings from the previous historical use analysis for this application. Provisional Permit Nos. 76N 81519-00, 76N 85780-00, and 76N 97278-00 are perfected permits. Provisional Permit No. 76N 30016270 is unperfected and therefore carries forward its full flow rate and volume to this change application. The historical use of these water rights is summarized in Table 5.

The Department will consider the following values when evaluating the historical use of Provisional Permit Nos. 76N 81519-00, 76N 85780-00, 76N 97278-00, and 76N 30016270 for the adverse effect criterion:

Tal	Table 5: Proposed Places of Use for the Water Rights Proposed for Change										
Water Right Number	Historical Purpose	Historical Places of Use	Historical Points of Diversion	Maximum Historical Flow Rate (GPM)	Historically Consumed Volume (AF)	Historically Diverted Volume (AF)					
76N 81519-00				110.00	4.89	48.90					
76N 85780-00	Manufain at	C T-1	1- 0	210.00	10.43	104.32					
76N 97278-00	Municipal	See Tab	oie 2	440.00	2.60	25.98					
76N 30016270				688.50	19.81	198.10					

Review

This document has been reviewed by the Department on March 20, 2025.

References

Department Standard Practice for Determining Historical Use



Groundwater Change Technical Analyses Report- Part B

$\label{lem:conservation} \textbf{Department of Natural Resources and Conservation} \ (\textbf{DNRC})$

Water Resources Division

Evan Norman, Groundwater Hydrologist, Water Sciences Bureau (WSB)

Applicant	Salish Shores Utility Corp.	Point of Diversion Legal Land Description	NW ¹ / ₄ Section 15, Township 21North, Range 29 West
Application No.	76N 30165123		

Overview

This report is Part B of a two-part publication which analyzes data submitted by the Applicant in support of the above-mentioned water right change application. This report provides technical analyses as required under the Administrative Rules of Montana (ARM) 36.12.1303 in support of the water rights criteria assessment as required in §85-2-402, Montana Code Annotated (MCA).

This Groundwater Change Technical Analyses Report – Part B contains the following sections:

Overview	1
1.0 Executive Summary	2
2.0 Hydrogeologic Setting	4
3.0 Drawdown and Yield Test Summary	5
4.0 Aquifer Properties	6
5.0 Adequacy of Diversion Analysis	7
6.0 Adverse Effect Analyses	9
6.1 Adverse Effect Groundwater - Drawdown in Existing Wells	9
6.2 Adverse Effect Surface Water - Net Depletions (Consumed Water)	13
Review	17
References	17



1.0 Executive Summary

Application Details

The Applicant proposes to add a point of diversion (POD) and change the place of use (POU) for Provisional Permit Nos. 76N 81519-00, 76N 85780-00, 76N 97278-00, and unperfected Permit No. 76N 30016270. A previous Change Authorization No. 76N 30027719 added an additional POD to the existing permits for a total of 7 wells. The proposed change would add one well to the existing municipal water supply system for a total of 8 wells and change the POU to include the entire Salish Shores water service area near Thompson Falls, Sanders County, Montana.

Information provided by the Applicant shows that four (Montana Bureau of Mines and Geology (MBMG) Groundwater Information Center (GWIC) IDs 135335, 131977, 175584, 175632) of the 7 existing wells are the primary Production Wells for the service area. Therefore, the existing (historical) pumping schedule was apportioned to four wells (**Table 6**), with the proposed pumping schedule apportioned to 5 wells (**Table 7**), including GWIC ID 76372. The redundant wells, GWIC IDs 139319, 139318, and 175585 were not assigned proportions of historical or proposed pumping volumes. The list of wells, including well depth and estimated capacity is shown in **Table 1**. The total flow rate and volume proposed for change is 1,448.5 gallons per minute (gpm) and 377.4 acre-ft (AF) per year for municipal purpose with a period of diversion and period of use from January 1 to December 31.

Table 1: PODs for Change Application No. 76N 30165123.

GWIC ID	Well Depth (ft, btc)	Estimated Capacity (gpm)
135335	121	246.0
131977	141	245.0
139319	240	427.0
139318	246	307.0
175584	367	160.0
175632	355	240.0
175585	423	75.0
76372 (proposed)	303	167.5

Approved Variances from ARM 36.12.121

No variances were required from ARM 36.12.121.

WSB Technical Findings

Based on information submitted, the WSB estimated aquifer properties, evaluated the production well(s) available water column, and evaluated potential impacts to existing groundwater and surface water rights. Adverse effects were evaluated by comparing drawdown in existing wells, net depletions to surface water for existing and proposed conditions. These analyses are in support of the following criteria assessment: adequacy of diversion and adverse effect. A summary of WSB findings described in subsequent sections are listed below.



TECHNICAL ANALYSES FINDINGS

AQUIFER TEST ANALYSIS	An aquifer Transmissivity (T) of 6,750 ft²/day, Storativity (S) of 1.7 x 10 ⁻⁴ , and leakage parameter (β) of 0.14 from information in Provisional Permit No. 76N 30016270 and Geomatrix Consultants, Inc. (2005) are recommended for aquifer properties.
ADEQUACY OF DIVERSION	The proposed well using the Hantush (1960) early-time solution, a T of 6,750 ft ² /day, S of 1.7 x 10^{-4} , β of 0.14 and the monthly pumping schedule identified in Table 5 would experience 2.9 feet (ft) of drawdown after the first year, leaving approximately 256.8 ft of available water column above the bottom of the well.
ADVERSE EFFECT (DRAWDOWN IN EXISTING WELLS)	After five years, assuming wells are pumped according to Applicant provided schedule, no new groundwater rights in the source aquifer are predicted to experience drawdown greater than or equal to one foot.
ADVERSE EFFECT (NET DEPLETION TO SURFACE WATER)	The Clark Fork River, starting at the eastern boundary of NENW of Section 22, Township 21 North, Range 29 West, is identified as being hydraulically connected to the source aquifer. Monthly net depletions resulting from the historical and proposed conditions are identified in Table 2 and the starting point of net depletions in Figure 6 . The depth of the wells and semi-confining unit cause net depletions to be dampened resulting in a constant year-round depletion. No change in the rate, timing, and location of net

depletions to surface water would occur because of the proposed change.



Table 2: Net depletion to the Clark Fork River under historical and proposed conditions and net effect from the proposed change

Month	Historical and Proposed Consumed Volume (AF)	Historical Net Depletion (gpm)	Proposed Net Depletion (gpm)	Net Effect (gpm)
January	3.2	23.4	23.4	0.0
February	2.9	23.4	23.4	0.0
March	3.2	23.4	23.4	0.0
April	3.1	23.4	23.4	0.0
May	3.2	23.4	23.4	0.0
June	3.1	23.4	23.4	0.0
July	3.2	23.4	23.4	0.0
August	3.2	23.4	23.4	0.0
September	3.1	23.4	23.4	0.0
October	3.2	23.4	23.4	0.0
November	3.1	23.4	23.4	0.0
December	3.2	23.4	23.4	0.0
Total	37.7			

2.0 Hydrogeologic Setting

As identified in **Figure 1**, the proposed well (GWIC ID 76372) is approximately 0.6 miles from the Clark Fork River. The well is completed 303 ft below ground surface (bgs) with a pre-test static water level (swl) of 44.55 ft below top of casing (btc). The proposed well will be one of eight wells, all completed in glacial-lake deposits which represent a leaky-confined to confined aquifer system. The well log of GWIC ID 76372 (112DRFT) describes coarse gravelly alluvium assumed to be a glacial flood deposit unit connected to the Clark Fork River, above glacial-lake deposits of fine sand, clay with sand; and gravel, sand, and clay (Lonn et al., 2007).

The shallow Quaternary aged alluvial aquifers are recharged by local streams, groundwater recharge from the Clark Fork River, and by infiltration of precipitation. The deep Pleistocene aged alluvial aquifer is recharged by mountain front recharge and losses from streams along the shallow alluvium. The groundwater flow direction is parallel to the Clark Fork River from southeast to the northwest. The width of the Clark Fork River alluvium varies throughout the watershed and is approximately 1.3 miles wide at the proposed change location. The source aquifer discharges to springs and seeps along valley bottoms and reaches of streams that interact with groundwater. The alluvial aquifer is bounded by Precambrian-aged Belt Supergroup sedimentary rock including formations of metasediments (Kendy and Tresch, 1996).



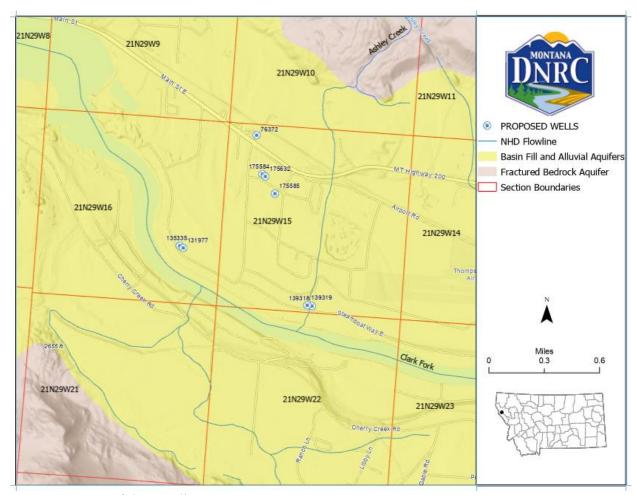


Figure 1: Map of the Applicant's historical (existing) and proposed well (GWIC ID 76372).

3.0 Drawdown and Yield Test Summary

A "Drawdown and Yield Test" is a pumping test that is meant to evaluate well construction and the ability of the aquifer to yield water to the well. This is also known as demonstrating "adequacy of diversion". The minimum duration of these tests is 8-hours. Observation Wells, pre-test, and post-test data is not required for Drawdown and Yield Tests.

Field Methods and Equipment

An 8.1-hour drawdown and yield test was performed on GWIC ID 76372. Water levels during the test were collected using LevelTroll 700 electronic pressure transducers and verified with manual e-tape measurements. The discharge was measured with a MasterMeter Octave in-line 3" ultrasonic flowmeter.

Background Data

Background data is not required as part of drawdown and yield tests and was not collected.



Drawdown and Recovery Data

The 8.1-hour drawdown and yield test started on October 4, 2023, at 4:19 P.M. on GWIC ID 76372 and is considered (t=0) for the computation of drawdown. The test had an average discharge of 167.5 gpm, with minimum and maximum discharge rates of 161.0 and 176.0 gpm, respectively. The maximum drawdown in GWIC ID 76372 was 32.91 ft below the swl of 44.55 ft btc, leaving approximately 226.7 ft above the bottom of the well. Recovery water level data is not required as part of drawdown and yield tests, however, the Applicant provided approximately 10 minutes of recovery data after the cessation of pumping.

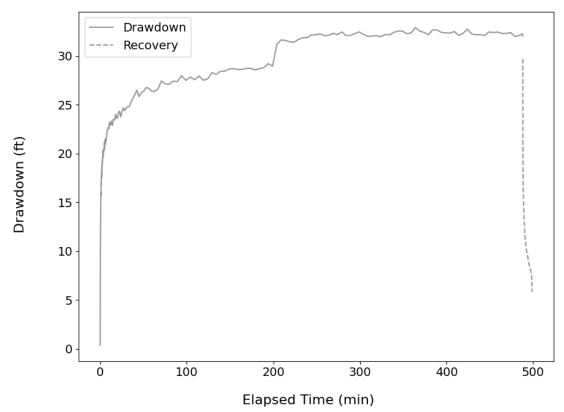


Figure 2: Drawdown and yield test including recovery measurements for Production Well, GWIC ID 76372.

4.0 Aquifer Properties

An "Aquifer Test" is a pumping test that is meant to provide data to model aquifer properties. The minimum duration of these tests is either 24-hours or 72-hours, depending on the proposed flow rate and volume (ARM 36.12.121(3)(e)), and DNRC only requires one of these tests per application. In lieu of submitting an aquifer test on the proposed well the Applicant submitted aquifer testing and aquifer property information from Provisional Permit No. 76N 30016270 Geomatrix Consultants, Inc. (2005). A summary of aquifer properties derived from aquifer testing on existing municipal wells is shown in **Table 3.**



Table 3: Aquifer tests analysis summary for GWIC ID 135335 and 139319.

Production Well (GWIC ID)	Observation Well (GWIC ID)	Solution	T (ft²/day)	S	Duration (hrs)	Pumping Rate (gpm)
135335	131977	Hantush-Jacob	6,594	7.0E-5	72.0	246.0
139319	139318	Hantush-Jacob	5,366	2.7E-4	74.0	427.0

The recommended T of 6,750 ft²/day utilized in Provisional Permit No. 76N 30016270, was calculated with the average horizontal hydraulic conductivity of 30 ft per day from aquifer tests performed on GWIC ID 135335 and GWIC ID 139319. The saturated thickness of 225 ft used to calculate T was estimated based on drillers well logs and Herrick (2005). The recommended S of 1.7×10^{-4} is from the average of data from Observation Wells, GWIC ID 131977 and GWIC ID 139318 (**Table 3**).

The aquifer properties in Geomatrix Consultants, Inc. (2005) were derived from the Hantush-Jacob (1955) leaky-confined aquifer solution which does not consider aquitard storage. The Hantush-Jacob (1955) solution and Hantush (1960) leaky-confined complete solutions also assume infinite constant head source plane source above the aquitard. Therefore, the Hantush (1960) leaky-confined early-time solution was chosen for forward modeling using a leakage parameter described below.

The leakage parameter (β) was calculated (**Eq. 1**) using the recommended T of 6,750 ft²/day, an average aquitard thickness of 200 ft, and vertical hydraulic conductivity of the aquitard (K') of 0.1 ft per day from Geomatrix Consultants, Inc. (2005) which represents sandy silts (Fetter, 1994) and very fine sand, silt, loess or loam (Bear, 1972) primarily described in well logs. The radial distance from the pumping well to observation well (r) was represented with the radius of the pumping well. The recommended β of 0.14 is within the range of recommended values from Kruseman and de Ridder (1991).

$$\beta = \frac{r}{B} = \frac{r}{\sqrt{\frac{T \cdot b'}{K'}}}$$
 Eq. 1

Aquifer Property Comparison

The two aquifer tests performed on GWIC ID 135335 and 139319 are the only aquifer properties within the region of Application No. 76N 30165123, therefore, no additional tests were used as comparison for aquifer properties.

5.0 Adequacy of Diversion Analysis

An evaluation of the potentially available water column remaining in the Production Well is modeled using the Hantush (1960) early-time solution, with a T of 6,750 ft²/day, S of 1.7 x 10^{-4} and β of 0.14. Predicted theoretical drawdown for the proposed well is modeled for the period of diversion using the monthly pumping schedule identified in **Table 4**. The Applicant requests a volume of 8.3 AF for the proposed well. Applicant-provided water use records were used to distribute the volume to the proposed well and existing wells.



Table 4: Applicant provided monthly pumping schedule for municipal purposes.

Month	Proposed Well Diverted Volume (AF)	Proposed Well Diverted Flow Rate (gpm)	All Wells Diverted Volume (AF)	All Wells Diverted Flow Rate (gpm)
January	0.3	2.1	13.1	95.9
February	0.4	2.8	15.9	128.3
March	0.4	3.0	18.4	134.5
April	0.6	4.5	26.9	202.6
May	0.9	6.3	38.8	283.2
June	1.2	9.0	53.8	405.9
July	1.0	7.2	44.6	325.4
August	1.5	10.7	66.5	485.5
September	0.8	5.9	35.3	266.5
October	0.7	5.3	32.8	239.5
November	0.4	3.1	18.3	138.2
December	0.3	2.1	12.9	94.2
Total	8.3		377.4	

As identified in **Table 5**, total drawdown is the sum of interference drawdown and predicted drawdown with well loss. Well loss is calculated by dividing the predicted theoretical maximum drawdown by a well efficiency value. Well efficiency is calculated by dividing the modeled maximum drawdown for the aquifer test by the maximum observed drawdown of the drawdown and yield test. The aquifer adjacent to the proposed well would experience a predicted total drawdown of 0.3 ft at the end of August of the first year of pumping (**Figure 3**). The remaining available water column for the proposed well is 256.8 ft and is equal to the available drawdown above the bottom of the well minus total drawdown. The saturated thickness (b) of 260 ft (**Figure 3**; **Table 5**) is the calculation of the approximate available drawdown above the bottom of the well.

Table 5: Remaining available water column for the proposed well.

Drawdown Estimate	Proposed Well (GWIC ID 76372)
Total Depth at Bottom of Well (ft btc) ¹	304.0
Pre-Test Static Water Level (ft btc)	44.35
Available Drawdown Above Bottom of Well (ft)	259.7
Observed Drawdown of Aquifer Test (ft)	32.9
Modeled Drawdown Using Mean Aquifer Test Rate (ft)	3.1
Well Efficiency (%)	9.4
Predicted Theoretical Maximum Drawdown (ft)	0.3
Predicted Drawdown with Well Loss (ft)	2.9
Interference Drawdown (ft)	0.0
Total Drawdown (ft)	2.9
Remaining Available Water Column (ft)	256.8

¹The total well depth measuring point (bgs) was adjusted to the top of well casing based on a 1-foot well casing stickup reported on the well log.



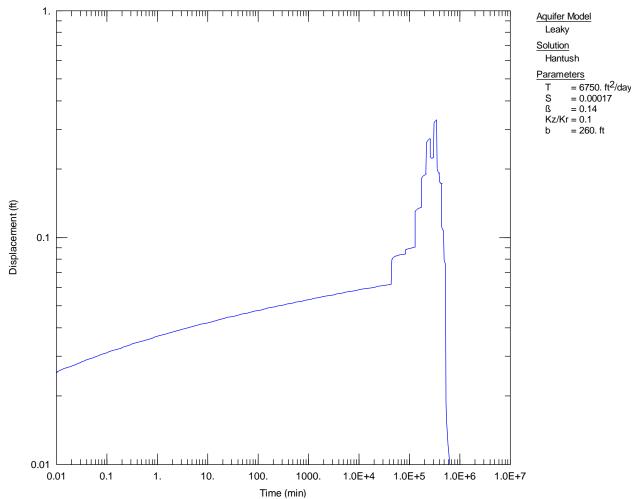


Figure 3: Hantush (1960) solution time-drawdown plot using the assumed pumping schedule for the proposed well (**Column 3, Table 4**).

6.0 Adverse Effect Analyses

Under §85-2-402, Montana Code Annotated (MCA), using the Applicant's proposed pumping schedule and associated volume, adverse effect is evaluated by modeling drawdown in nearby wells and changes in net depletions to surface water.

6.1 Adverse Effect Groundwater - Drawdown in Existing Wells

Drawdown in existing wells was modeled for existing and proposed conditions with the Hantush (1960) early-time solution, a T of 6,750 ft²/day, S of 1.7 x 10^{-4} , β of 0.14, and the monthly pumping schedules identified in **Table 6** and **Table 7** for a period of five years. The Applicant provided water use records in 2023 and 2024 which reflects approximate monthly use shown in **Table 6** and **Table 7**.

Due to the proximity of GWIC ID 135335 and 131977, and GWIC ID 175584 and 175632, the monthly pumping schedules were modeled as centroids between each well pair. The maximum



drawdown at the end of August of the fifth year of pumping under existing conditions (**Table 6**) show maximum drawdown at the centroid of the well pairs (**Figure 4**). The maximum drawdown at the end of August of the fifth year of pumping under proposed conditions (**Table 7**) show maximum drawdown at the centroid of the well pairs and the proposed well (GWIC ID 76372) (**Figure 5**).

Table 6: Monthly pumping schedules for existing wells.

Month	GWIC ID 135335 and 131977 (gpm)	GWIC ID 175584 and 174632 (gpm)	Total pumping schedule (gpm)	Total pumping volume (AF)
January	71.6	24.4	95.9	13.1
February	95.7	32.6	128.3	15.9
March	100.3	34.2	134.5	18.4
April	151.1	51.5	202.6	26.9
May	211.3	71.9	283.2	38.8
June	302.8	103.1	405.9	53.8
July	242.8	82.7	325.4	44.6
August	362.2	123.3	485.5	66.5
September	198.8	67.7	266.5	35.3
October	178.7	60.8	239.5	32.8
November	103.1	35.1	138.2	18.3
December	70.3	23.9	94.2	12.9
Total				377.4

Table 7: Monthly pumping schedules for proposed wells.

Month	GWIC ID 135335 and 131977 (gpm)	GWIC ID 175584 and 174632 (gpm)	GWIC ID 76372 (gpm)	Total pumping schedule (gpm)	Total pumping volume (AF)
January	70.0	23.8	2.1	95.9	13.1
February	93.6	31.9	2.8	128.3	15.9
March	98.1	33.4	3.0	134.5	18.4
April	147.8	50.3	4.5	202.6	26.9
May	206.6	70.3	6.3	283.2	38.8
June	296.1	100.8	9.0	405.9	53.8
July	237.4	80.8	7.2	325.4	44.6
August	354.2	120.6	10.7	485.5	66.5
September	194.5	66.2	5.9	266.5	35.3
October	174.7	59.5	5.3	239.5	32.8
November	100.8	34.3	3.1	138.2	18.3
December	68.7	23.4	2.1	94.2	12.9
Total					377.4



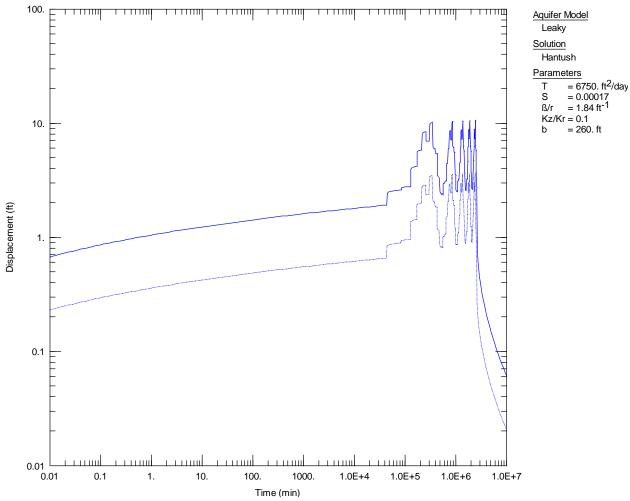


Figure 4: Hantush (1960) solution modeled time-drawdown plot using the Applicant-provided monthly pumping schedule for the existing wells (solid line: well pair GWIC IDs 135335 and 131977; dashed line: well pair GWIC IDs 175584 and 175632).



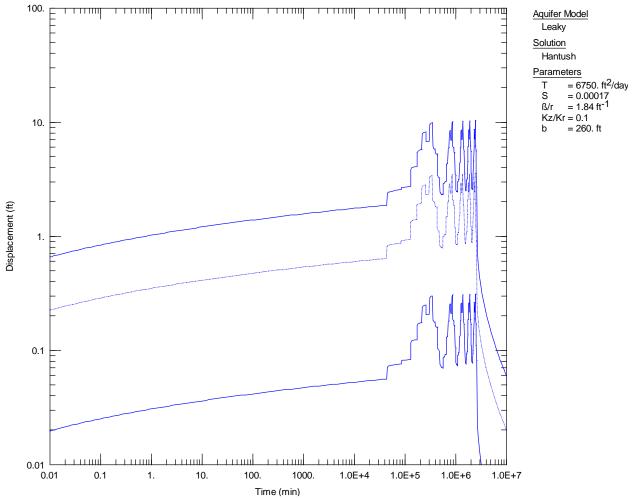


Figure 5: Hantush (1960) solution modeled time-drawdown plot using the Applicant provided monthly pumping schedule for the proposed wells (upper solid line: well pair GWIC IDs 135335 and 131977; dashed line: well pair GWIC IDs 175584 and 175632; lower solid line: GWIC ID 76372).

Using the Applicant-provided monthly pumping schedule, the one-foot drawdown contour for well pair GWIC ID 135335 and 131977 extends approximately 50 ft from the centroid of the two wells. The one-foot drawdown contour for well pair GWIC ID 175584 and 175632 extends approximately 15 ft from the centroid of the two wells. No existing water rights are within the modeled one-foot contour for either existing well pair.

With the addition of the proposed well, using the Applicant provided monthly pumping schedule, the one-foot drawdown contour for well pair GWIC ID 135335 and 131977 reduces to approximately 40 ft from the centroid of the proposed wells. The one-foot drawdown contour reduces to approximately 10 ft from well pair GWIC ID 175584 and 175632. The proposed well, GWIC ID 76372, has a maximum drawdown extent of approximately 0.3 ft. No water rights are within the modeled one-foot contour for either existing well pair or the proposed well.



6.2 Adverse Effect Surface Water - Net Depletions (Consumed Water)

Net depletion is equal to the consumed volume for a proposed groundwater use and is described as the calculated volume, rate, timing, and location of reductions to surface water that are offset by return flows (non-consumed water) from the place of use. Net depletion is evaluated by 1.) quantifying the consumed volume associated with the proposed use; 2.) identifying hydraulically connected surface waters; and 3.) calculating the monthly rate and timing of depletions to affected surface water(s).

1. Consumed Volume

Consumed groundwater does not return to the source aquifer. Consumed volume depends on the proposed use and its associated percentage of known consumption. Depletion is assumed to be equivalent to consumption on an annual basis unless return flows do not accrete to the potentially affected surface water.

Monthly consumption for irrigation is based on the net irrigation requirement calculated using the USDA Natural Resources Conservation Service (NRCS) Irrigation Water Requirements (IWR) program with inputs consistent with DNRC consumptive use rules in ARM 36.12.1902. Monthly consumption for irrigation of turf grass (lawns) is based on the net irrigation requirement from IWR with the following inputs for pasture grass and sprinkler irrigation:

- dry year
- have IWR re-calculate start and end date using default temperature
- 1-inch net irrigation application
- 0.25-inches of carryover moisture at the beginning and end of growing season.

Consumption for domestic or institutional purposes listed in **Table 8** are based on the results of studies by Kimsey and Flood (1987), Vanslyke and Simpson (1974), and Paul, Poeter, and Laws (2007).

Table 8: Percent consumption for domestic use by wastewater disposal/treatment method.

Wastewater Treatment/Disposal	Consumed
Individual drain fields	10%
Central treatment facility with minimal consumption	5%
Evaporation basin or land application	100%

For the subject application, the historical and proposed uses include municipal purposes with individual drain fields. Following DNRC standards, the total annual consumed volume is equal to 37.7 AF.

2. Hydraulically Connected Surface Water(s)

Net depletions to surface water depend on propagation of drawdown to locations where surface water is hydraulically connected to groundwater, the hydraulic properties of an aquifer, and is not a function of groundwater flow rate or direction (Theis, 1938; Leake, 2011). Hydraulic connection depends on the depth to groundwater beneath the beds of surface waters and can vary along a reach





and with time of year. Drawdown from pumping can propagate through the entire thickness of the confining layer to overlying aquifers or surface waters (Konikow and Neuzil, 2007).

Per DNRC (2018) hydraulic connection of individual stream reaches to groundwater is evaluated by comparing streambed elevations to static groundwater elevations measured in wells less than 50 ft deep and within 1,000 ft of surface water or from published water table maps. Surface water within that area is considered hydraulically connected to the unconfined aquifer if static groundwater elevations are above or within 10 ft of the elevation of the stream bed. Hydraulic connection of a confined aquifer to surface water is based on information such as the continuity and thickness of a confining layer and whether overlying shallow unconfined aquifers are connected to surface water (DNRC, 2018).

The Clark Fork River near the proposed and existing wells is classified as perennial per the USGS National Hydrographic Dataset (NHD) and is approximately 600 ft from the Applicant's PODs. Shallow wells near the project location, north of the Clark Fork River, that meet the criteria for DNRC (2018) include GWIC ID 134163 in Section 23, Township 21 North, Range 29 West, (**Figure 6**) and GWIC IDs 76359 and 132636 in Section 9, Township 21 North, Range 29 West. Based on information from well logs with shallow static water levels upgradient and downgradient of the proposed wells, the adjacent terraces and steep banks which may cause a greater river incision depth into sediments of the shallow alluvium, and the ability of the aquitard to transmit water under the vertical hydraulic conductivity (K') as shown in **Eq. 1**, the Clark Fork River is considered hydraulically connected to the source aquifer.

Further, Provisional Permit No. 76N 30016270 identified the Clark Fork River as hydraulically connected and modeled depletions to it. Ashley Creek, a nearby surface water body, is approximately 3,100 ft from proposed well GWIC ID 76372. Ashley Creek is noted as intermittent in NHD and aerial imagery shows no defined stream channel. No wells less than 50 ft deep with shallow static groundwater elevations are mapped within the vicinity of Ashley Creek. As such, Ashley Creek was not considered a hydraulically connected source.



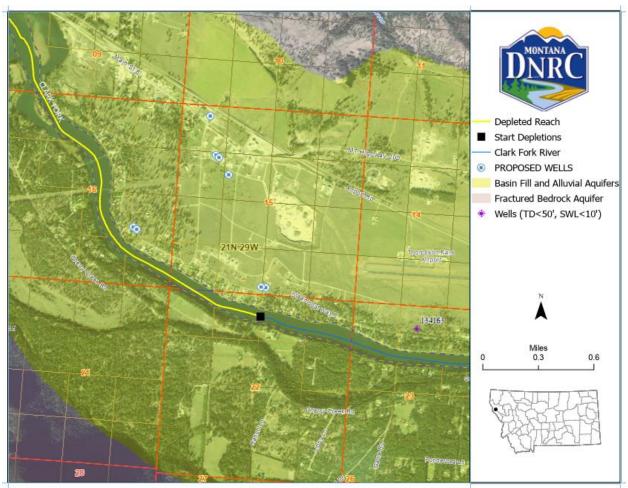


Figure 6: Proposed well and historical and proposed starting point of net depletions on the Clark Fork River.

3. Rate and Timing of Depletions

Evaluations of the rate and timing of depletions caused by pumping are based on the basic concept that groundwater pumping eventually is offset by an equivalent increase in recharge or decrease in discharge (Theis, 1940; Leake et al., 2008), a process defined as capture by Lohman (1972). Capture occurs as drawdown propagates to surface water and areas of phreatophyte vegetation that takes water directly from groundwater. In the absence of credible evidence to the contrary, capture of ET by phreatophytes is neglected and net depletion is assumed to equal total capture. This assumption is justified because published estimates for conditions common in Montana alluvial valleys indicate capture of ET generally is less than 10 percent of total capture (Xunhong, 2006). Capture of ET in ephemeral drainages may be significant and will be evaluated on an application-by-application basis.

The rate and timing of net depletion caused by pumping may be modeled using a variety of analytical and numerical models selected to fit site-specific conditions and needs. Simple models including the Alluvial Water Accounting System (AWAS) and the Well Pumping Depletion Model





(WPDM) typically are used by DNRC to model depletions to one source with simple aquifer boundaries. Adjustments may be made for more complex conditions or multiple sources using methods like those described by Contor (2011), analytical models by Hunt (2003) and Butler et al. (2001) or a superposition numerical groundwater flow model.

Modeling is not necessary in some situations such as where a proposed use is constant year-round because of the depth to the source aquifer and a distance to potentially affected stream reaches. Modeling of depletions can be simplified if the proposed place of use is located the same relative distance from the potentially affected surface water as the proposed wells and all non-consumed water infiltrates the source aquifer and returns to the potentially affected surface water as return flows. Under those simplifying assumptions, depletion can be modeled based on withdrawal of the monthly consumed amounts. Otherwise, depletion by the full withdrawals and return flows need to be modeled separately with net depletion calculated as depletion minus return flows.

Net depletion caused by pumping the source aquifer primarily occurs as propagation of drawdown through the overlying confining layer to the affected reach of the Clark Fork River. As identified in **Table 2**, net depletion effects are expected to be dampened resulting in a constant year-round rate of depletion to Clark Fork River downstream of the eastern boundary of NENW¹/₄, Section 22, Township 21 North, Range 29 West.

The distance of the historical and proposed wells from the Clark Fork River, the similar distances along the length of the river, and similar completion depth of the existing wells and proposed well, results in no change to the location of net depletions and timing of net depletions (constant year-round). As identified in **Table 2**, the calculated historical and proposed annual net depletion volume of 37.7 AF to the Clark Fork River will result in monthly net depletion rates of 23.4 gpm.



Review

This document has been reviewed on March 12, 2025 in accordance with Category 7 of DNRC's Water Sciences Bureau Minimum Standards of Review, Version 2, February 2024.

References

Alluvial Water Accounting System (AWAS), 2003. Integrated Support System at Colorado State University, http://www.ids.colostate.edu/projects.php?project=awas.

Butler, J.J., Zlotnik, V.A., and Tsou, M.S., 2001. Drawdown and stream depletion produced by pumping in the vicinity of a partially penetrating stream. Ground Water 39 (5), 651–659.

Contor, B.A., 2011. Adaptation of the Glover/Balmer/Jenkins Analytical Stream-Depletion Methods for No-Flow and Recharge Boundaries, Idaho Water Resources Research Institute, Technical Completion Report, 15 p.

Fetter, C.W., Applied Hydrogeology, 1994, 3rd Edition, Prentice Hall, Upper Saddle River, New Jersey. Groundwater Information Center, 2022. Montana Bureau of Mines and Geology, http://mbmggwic.mtech.edu/.

Geomatrix Consultants, Inc. 2005. Hydrogeologic Summary Report Salish Shores Public Water Supply. 24 p.

Hantush, M.S. 1960. Modification of the theory of leaky aquifers, Jour. of Geophys. Res., vol. 65, no. 11, pp. 3713-3725.

Hantush, M.S. and C.E. Jacob. 1955. Non-steady radial flow in an infinite leaky aquifer, Am. Geophys. Union Trans., vol. 36, no. 1, pp. 95-100.

Herrick, J. F., 2005. Source Water Delineation and Assessment Report. Montana Department of Environmental Quality. Sanders County Water District. 45 p.

Hunt, B., 2003. Unsteady stream depletion when pumping from semi-confined aquifer. Journal of Hydrologic Engineering 8, no. 1: 12-19.

HydroSOLVE, Inc. 2007. AQTESOLV for Windows, v.4.5. written by G.M. Duffield, http://www.aqtesolv.com/.

Kendy, E., and R.E. Tresch. 1996. Geographic, Geologic, and Hydrologic Summaries of Intermontane Basins of the Northern Rocky Mountains, Montana: U.S. Geological Survey Water Resources Investigations Report 964025, 233 p.

Kimsey, D.W. and P.K. Flood, 1987. Domestic consumptive use, technical memorandum to the Chief Engineer of the State of Colorado, 16 p

Kruseman, GP, N.A. de Ridder. 1994. Analysis and Evaluation of Pumping Test Data (2nd ed.), Publication 47, Intern. Inst. for Land Reclamation and Improvement, Wageningen, The Netherlands, 370 p.



Konikow, L. F. and C. E. Neuzil, 2007. A method to estimate groundwater depletion from confining layers, Water Resources Research., 43, W07417, doi:10.1029/2006WR005597.

Leake, S. A., Pool, D. R., and Leenhouts, J. M., 2008. Simulated effects of ground-water withdrawals and artificial recharge on discharge to streams, springs, and riparian vegetation in the Sierra Vista Subwatershed of the Upper San Pedro Basin, southeastern Arizona: U.S. Geological Survey Scientific Investigations Report 2008-5207, 14 p. http://pubs.usgs.gov/sir/2008/5207/sir2008-5207.pdf.

Lonn, J.D., Smith, L.N., and McCulloch, R.B., 2007. Geologic map of the Plains 30' x 60' quadrangle, western Montana: Montana Bureau of Mines and Geology Open-File Report 554, 43 p., 1 sheet, scale 1:100,000.

Leake, S.A. 2011. Capture – rates and direction of groundwater flow don't matter! Groundwater, Vol. 49, No. 4, p. 456 – 458.

Lohman, S.W. 1972. Definitions of selected ground-water terms: Revisions and conceptual refinements, U.S. Geological Survey Water Supply Paper, 1988, 21 p., http://pubs.usgs.gov/wsp/wsp_1988/pdf/wsp_1988.pdf.

Lohman, S.W. 1972B. Ground-water hydraulics, U.S. Geological Survey Prof. Paper 708, page 70, http://pubs.er.usgs.gov/publication/pp708.

Paul, W., Poeter, E., and R Laws, 2007. Consumptive loss from and individual sewage disposal system in a semi-arid mountain environment. Colorado Water, Newsletter of the Water Center of Colorado State University, August/September 2007, Volume 24, Issue 4.

Theis, C.V. 1938. The significance and nature of the cone of depression in ground water bodies. Economic Geology 38,889–902.

Theis, C.V. 1940. The source of water derived from wells: Essential factors controlling the response of an aquifer to development. Civil Engineer 10: 277–280.

Vanslyke, G. and H. Simpson. 1974. Consumptive use of water by homes utilizing leach fields for sewage disposal, technical memorandum by the Colorado Division of Water Resources, 5 p.

Xunhong, C. 2006. Groundwater evapotranspiration captured by seasonally pumped wells in river valleys, Journal of Hydrology, V. 318, Issues 1-4, p. 334-347.

Preapplication Materials

- Preapplication Meeting Request
- Preapplication Meeting Form
- All attachments
- All correspondence prior to application receipt

Preapplication Materials

THE MONTANA DEPARTMENT OF NATURAL RESOURCES AND CONSERVATION

GOVERNOR GREG GIANFORTE



DNRC DIRECTOR AMANDA KASTER

February 3, 2025

Salish Shores Utility Corp. LLC PO Box 1030 Thompson Falls, MT 59873

Subject: Complete Preapplication Form for Beneficial Water Use Permit Application No. 76N 30165123

Dear Applicant,

The Kalispell Regional Office of the Department of Natural Resources and Conservation (DNRC or Department) received your updated Preapplication Meeting Form and preapplication meeting fee on January 31, 2025, and the Department deems the submitted Preapplication Meeting Form to be successfully completed per ARM 36.12.1302.

As designated on the submitted Preapplication Meeting Form per §85-2-302(3)(b), MCA, the Department will produce the technical analyses based on the parameters included in the Preapplication Meeting Form (ARM 36.12.1302(4)) within 45 days of the preapplication being deemed adequate, February 3, 2025.

If you have any questions, please contact me at 406.752.2735 or Kristal.Kiel@mt.gov.

Best.

Kristal Kiel Water Resources Specialist Kalispell Regional Office 655 Timberwolf Parkway, Suite 4 Kalispell, MT 59901

CC:

Bryan Gartland Aspect Consulting PO Box 134 Helena, MT 59624



SALISH SHORES UTILITY CORP INC

APPLICATION TO CHANGE A WATER RIGHT NO. 76N 30165123

FORM 606P FOLLOW-UP RESPONSES

5) Historic Use Map

See Attachment A

6) Proposed Use Map

See Attachment B

9.a.ii) Proposed Place of Use - Legal Land Descriptions

1/4	1/4	Section	Township	Range	County
NE	SW	9	21 North	29 West	Sanders
SE	SW	9	21 North	29 West	Sanders
NW	SE	9	21 North	29 West	Sanders
SW	SE	9	21 North	29 West	Sanders
SE	SE	9	21 North	29 West	Sanders
SW	SW	10	21 North	29 West	Sanders
NE	NW	14	21 North	29 West	Sanders
NW	NE	14	21 North	29 West	Sanders
NE	NE	14	21 North	29 West	Sanders
SE	NW	14	21 North	29 West	Sanders
SW	NE	14	21 North	29 West	Sanders
SE	NE	14	21 North	29 West	Sanders
NE	SE	14	21 North	29 West	Sanders
NE	NE	15	21 North	29 West	Sanders
NW	NE	15	21 North	29 West	Sanders

30.d.1) Historic Use – Supporting Municipal Use Information

See Attachment C for:

- Public Service Commission documentation (2007)
- Measurement records (2023-2024)
- DNRC 2008 Municipal Change in Use Authorization (76N 30027719)

40.e.ii) Historic Use - Consumed Volume

See Attachment C

67) New Point of Diversion - Flow Rate and Volume

POD#	Flow Rate	Volume	Period of Diversion
8	35 GPM	8.33 AF/yr	1/1 - 12/31

68) Pumping Schedule

Yes – The expected pumping schedule for the new point of diversion will differ from an allocation of diverted volume by the number of days in the month.

68.a) Monthly Pumping Schedule

POD No. 8 Projected Pumping Schedule:

The pumping schedule presented below reflects system water use in 2023-2024, which should approximate future patterns of use.

MONTH	VOLUME (AF)	MONTH	VOLUME (AF)
January	1.48	July	5.01
February	1.78	August	7.47
March	2.07	September	3.97
April	3.02	October	3.69
May	4.36	November	2.06
June	6.05	December	1.45

70) Adequacy of Diversion

Yes - Applicant is submitting Form 633 as a follow-up item. Form 633 is included with the Form 606-ATA materials in Attachment D (Excel file).

70.a) Adequacy of Diversion – Form 633

See Attachment D (Excel file)

71.a) Adequacy of Diversion - Well Details

GWIC ID: 76372

Well depth = 303 feet


See Attachment B

Form 606-ATA Aquifer Testing Addendum


Form 606-ATA is not identified as a follow-up item on the Department's 606P form dated January 8, 2025. Per an email request from Kristal Kiel, DNRC Water Resource Specialist, on December 31, 2024, a completed Form 606-ATA and Form 653 (Variance Request) are being submitted at this time.

See Attachment D

ATTACHMENT A HISTORIC USE MAP

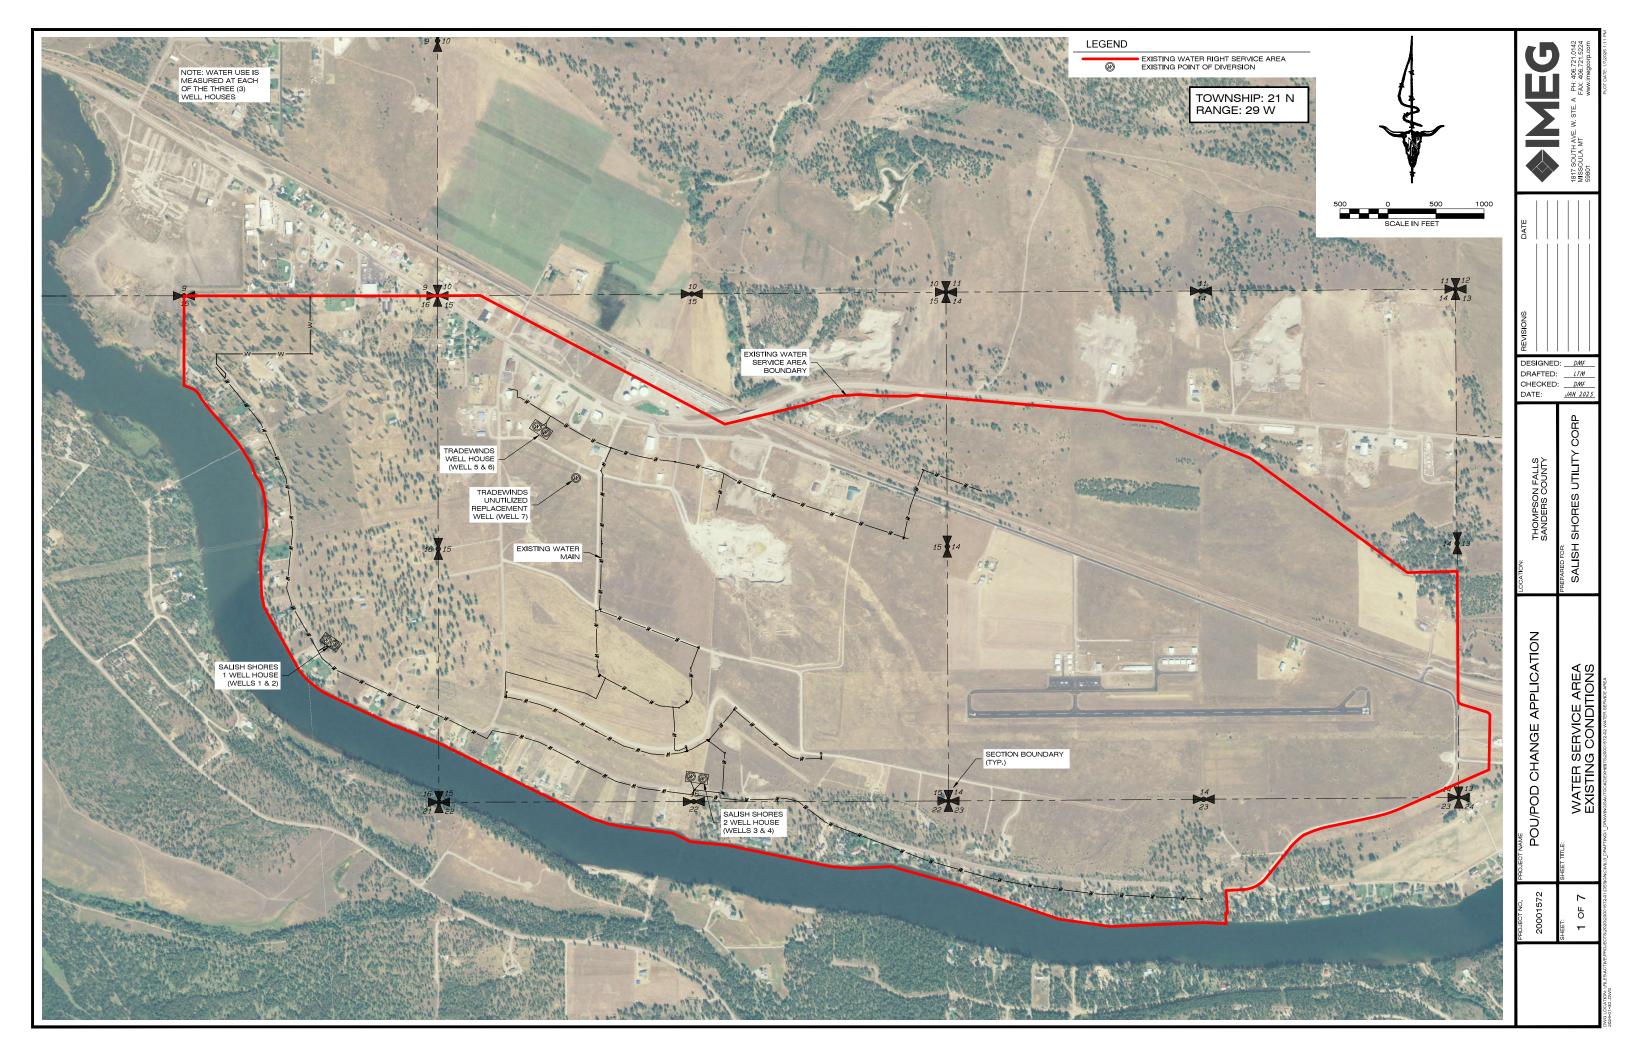

ATTACHMENT B PROPOSED USE MAP

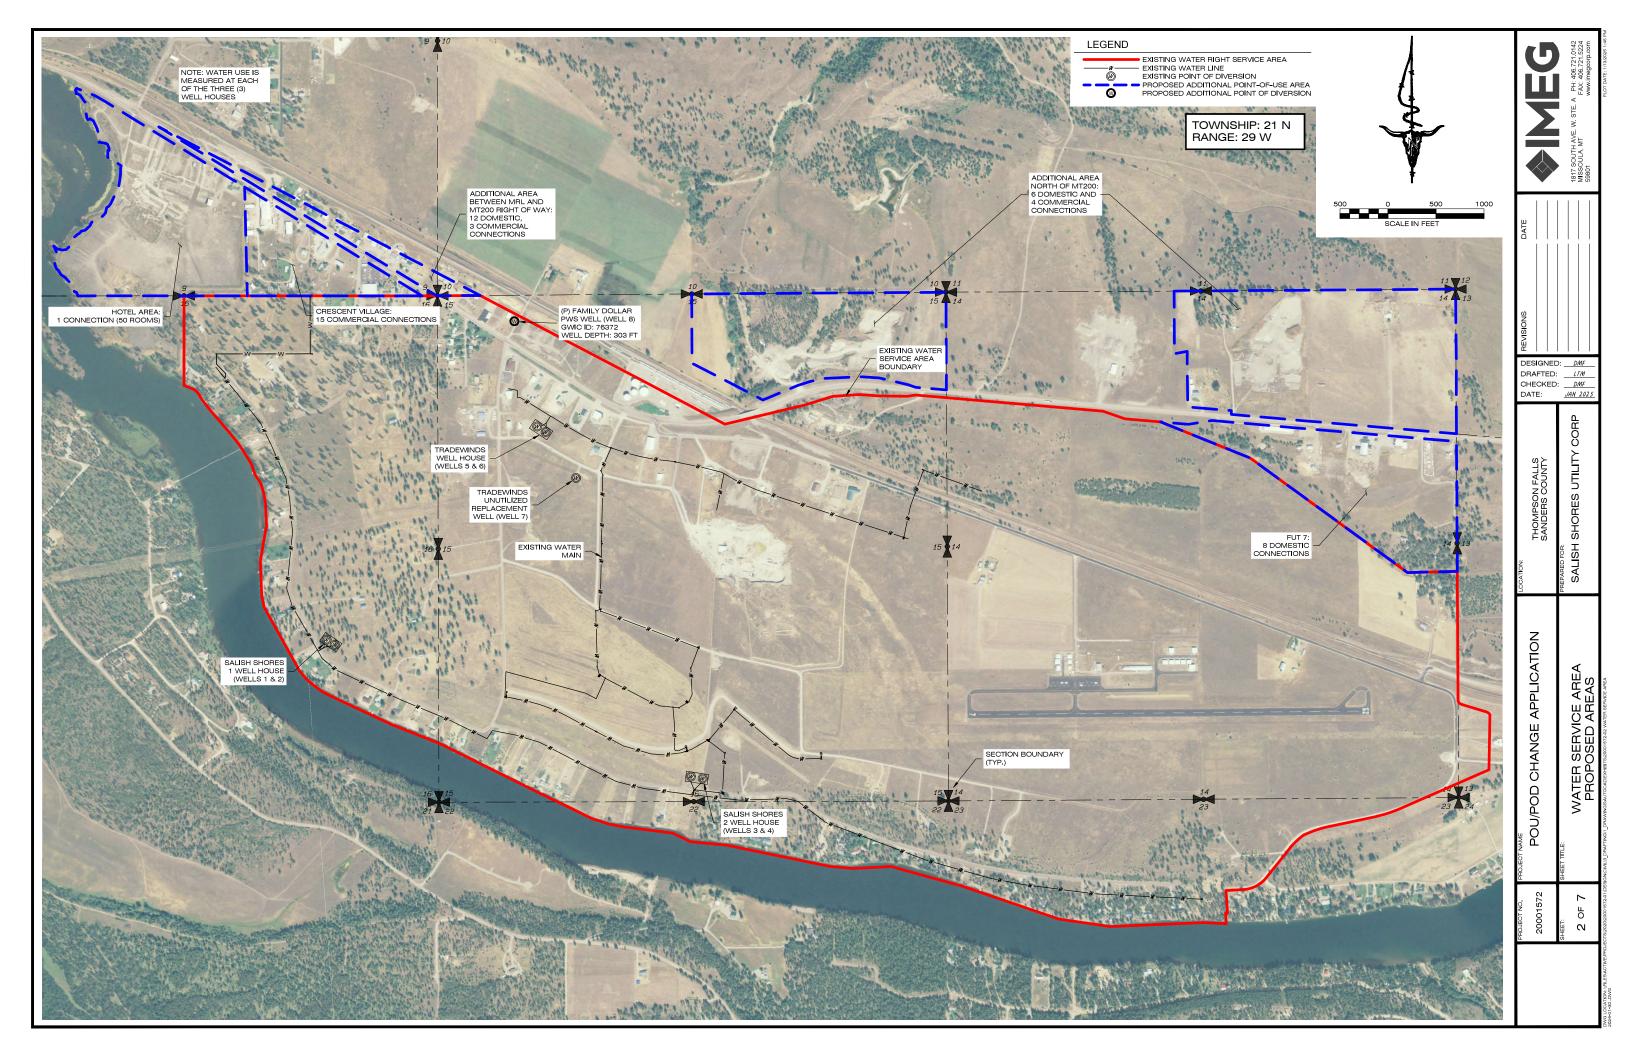

ATTACHMENT C HISTORIC USE – SUPPORTING MUNICIPAL USE INFORMATION

- Public Service Commission Documents
- Measurement Records (2023-2024)
- DNRC 2008 Municipal Change in Use Authorization (76N 30027719)

Salish Shores Utility Corporation PO Box 1030 Thompson Falls, MT 59873 406-827-3277

January 17, 2007

Montana Public Service Commission 1701 Prospect Avenue Helena. M7 59620

The enclosed tariffs are being submitted for approval pursuant to Commission Order No. 6797, dated January 10, 2007.

Salish Shores Utility Corp.

Buddy Leutkens

Salish Shores Utility Corp.

Sheet No. 1

	METERED WATER SERVICE
	Schedule M
	ability: For the Salish Shores Service Area Sanders County, Montana for all purposes tresale.
<u>Rate:</u>	Applicable to all residential and small commercial customers.
	Customer Charge
	Quantity Charge For all usage per 1000 gallons or fraction there of\$1.974
	The Customer Charge is applicable to all lots in the water service area. It is a readiness to serve charge which is added to the charge computed at the Quantity Rates for water used during the billing period.
Issued	1:By: Duddy Signature of Original Signature of Origina
FOR OF	HEEUSPONLY DO NOT PRINT BELOW THIS LINE
	PUBLIC SERVICE COMMISSION
	(Secretary)
·	

Salish	Shores	Util	ity	Con	p.
--------	--------	------	-----	-----	----

Sheet No. 2

	METERED WATER SERVICE
	Schedule M-1
Availa resalc.	bility: I or the Tradewinds Service Area Sanders County, Montana for all purposes except
Rate:	Applicable to all residential and small commercial customers.
	Customer Charge \$15.94/bimonthly
	Quantity Charge For all usage per 1000 gallons or fraction there of
	The Customer Charge is applicable to all lots in the water service area. It is a readiness to serve charge which is added to the charge computed at the Quantity Rates for water used during the billing period.
	By:
	PUBLIC SERVICE COMMISSION (Secretary)

Sheet No. 3

Salish Shores Utility Corp.

	FLAT RATE WATER SERVICE
	Schedule M-2
Availability: 1 except resale.	For the Trailhead Terrace Service Area Sanders County, Montana for all purposes
Rate: Applic meter.	cable to all residential and small commercial customers not provided service by
Flat R	ate Residential/Small Commercial Domestic \$25,52/bimonthly
	ner Charge \$9.89/bimonthly
	usage per 1000 gallons or fraction there of \$2.733
receiving serv	tistomer Charge is applicable to all lots in the water service area, except those rice on a flat rate basis. It is a readiness to serve charge which is added to the sted at the Quantity Rates for water used during the billing period.
Issued:	14/2007 By: Butter of Once for Under the State of Once for Under the Once for Under the State of Once for Under the Once
	PUBLIC SERVICE COMMISSION
	(Secretary)
i	

Salish Shores Utility Corp.	Sheet No. 4
WATER	SERVICE
Special Rules of Service	Schedule R
Consumer Deposits Any new customer or customer that has been position be charged a deposit of approximately twice the refunded when the customer has paid the bill of service.	- · · ·
Company's meter, connections, equipment, sea	is also defined as reconnection of service, that has
will be billed to the customer Charges for unauthorized use of service a. time, material and transportati b. estimated charge for water c. on-premise time to correct site	on costs used in investigation or surveillance.
Reconnection of Service Water service disconnected for unauthorized us	apliance with the company's rules and conditions
An account having a balance left unpaid 30 day payment charge.	es after the bill date is subject to a 1.0% late
Issued: /4/2007 By	(Signature of Officer of carrier)
COR OFFICE USE ONLY DO NOT PRINT BELOW THIS LINE	PUBLIC SERVICE COMMISSION
· 	(Secretary)

	147-II 4	M/- II 2	144-II E	N4-11-C	A D - 4 - - - 14/ -	-	A	- 82
	Well 1	Well 2	Well 5	Well 6	All Potable Wells	-	Averag	e IVI
Feb-23	0.534293	0.463095	0.079177	0.018106		_	lan	┡
Mar-23	1.654744					-	Feb	上
Apr-23	2.077023	1.638786				<u> </u>	Vlar	<u> </u>
May-23	2.067202	2.549938		0.692034	6.376840949	<u> </u>	Apr	
Jun-23	2.661953	3.24811	0.852844	0.90256	7.665466732	<u> </u>	Vlay	
Jul-23	1.291388	2.073954	0.736533	0.626667	4.728541573	يا	lun	
Aug-23	2.58431	3.194098	2.14638	1.730239	9.655026377	ر	lul	
Sep-23	2.145766	1.439308	0.484577	0.773973	4.843624847	4	Aug	
Oct-23	1.522168	1.699857	0.920359	0.973758	5.11614204	9	Sep	
Nov-23	0.880771	0.723644	0.453582	0.379008	2.437003416		Oct	
Dec-23	1.009357	0.856833	0.614698	0.41921	2.900098511	Ī	Vov	Т
Jan-24	0.69541	0.498694	0.213901	0.068436	1.476441687	Ī	Dec	Т
Feb-24	0.692648	0.80681	0.928645	0.045726	2.473830063	_		
Mar-24	0.012582	0.003069	0.051557	0.827065	0.894273763			
Apr-24	0.358446	0.301672	0.224336	0.231087	1.115540538			
May-24	0.949207	1.103572	0.219119	0.070278	2.342174798			
Jun-24	0.905015	1.175998	1.392354	0.954117	4.427483727			
Jul-24	2.355371	2.594744	0.162804	0.177382	5.290301395			
Aug-24	2.355371	2.594744	0.162804	0.177382	5.290301395			
Sep-24	1.408619	1.526158	0.104649	0.058002	3.097427966			
Oct-24	0.894581	1.150526	0.127052	0.085622	2.257780397			
Nov-24	0.518642	0.417062	0.448364	0.295841	1.679908915			
						1		
23 Total	18.42898	18.94854	8.267889	7.337096	52.98249814	1		
024 Total	11.14589	12.17305	4.035587	2.990938				

Average Monthly Volume (23/24) (AF)					
Jan	1.476441687				
Feb	1.784251084				
Mar	2.069964493				
Apr	3.017483451				
May	4.359507873				
Jun	6.046475229				
Jul	5.009421484				
Aug	7.472663886				
Sep	3.970526406				
Oct	3.686961218				
Nov	2.058456166				
Dec	1.450049256				

STATE OF MONTANA

DEPARTMENT OF NATURAL RESOURCES AND CONSERVATION

1424 9TH AVENUE P.O.BOX 201601 HELENA, MONTANA 59620-1601

CHANGE AUTHORIZATION

UPON FINDING THE REQUIREMENTS OF SECTION 85-2-402, MCA HAVE BEEN MET, APPLICATION TO CHANGE WATER RIGHT NUMBER 76N-30027719 SUBMITTED ON MAY 3, 2007, IS APPROVED.

Application From:

SALISH SHORES UTILITY CORP INC

PO BOX 1030

THOMPSON FALLS, MT 59873

Water Right

Wr# 76N-81519 Ext Type

Number(s) Changed:

00 PROVISIONAL PERMIT

76N-85780

00 PROVISIONAL PERMIT

76N-97278

00 PROVISIONAL PERMIT

76N-30016270

PROVISIONAL PERMIT

Authorization Limits

Flow Rate:

1,448.50 GPM ---

Volume: 377.30 AC-FT

Change Description:

FOUR PROVISIONAL WATER USE PERMITS HAVE BEEN ISSUED FOR INCREMENTAL PHASES OF WHAT IS NOW A MASTER DEVELOPMENT PLAN REGULATED BY THE PUBLIC SERVICE COMMISSION (PSC) FOR THE AREA ENCOMPASSED BY THE FOUR SUBJECT PERMITS. THIS CHANGE APPLICATION IS TO ADD AN ADDITIONAL POINT OF DIVERSION BY MEANS OF A BACK-UP WELL, CHANGE THE PURPOSE OF USE TO MUNICIPAL, MANIFOLD ALL WELLS AS THE MASTER PLAN DELINEATES, ADD A PLACE OF USE AND MAKE THE PLACE OF USE ON ALL WATER USE PERMITS IDENTICAL. THERE WILL BE NO INCREASE IN THE FLOW RATE OR VOLUME OF THE FOUR SUBJECT PERMITS ALREADY ISSUED. THE PROPOSED CHANGE IS FOR THE MAXIMUM COMBINED FLOW AND VOLUME OF THE EXISTING PERMITS.

COMPLETION DEADLINE

THE DEADLINE TO COMPLETE THIS AUTHORIZATION AND FILE A PROJECT COMPLETION NOTICE FOR CHANGE OF APPROPRIATION WATER RIGHT (FORM 618) IS <u>DECEMBER 31, 2021</u>. IF YOU CANNOT MEET THE DEADLINE, FILE A FORM 607, APPLICATION FOR EXTENSION OF TIME, BY DECEMBER 31, 2021 OTHERWISE, THE AUTHORIZATION IS VOID.

CONDITIONAL APPROVAL

THIS AUTHORIZATION IS LIMITED TO THE AMOUNT OF THE HISTORIC USE RECOGNIZED BY THE DEPARTMENT IN THIS PROCEEDING AS SUBJECT TO CHANGE, AND WILL THEREAFTER NOT EXCEED THAT AMOUNT. IF THE HISTORIC USE IS REDUCED UNDER ADJUDICATION PROCEEDINGS PURSUANT TO TITLE 85, CHAPTER 2, PART 2, MCA, THIS AUTHORIZATION WILL BE LIMITED TO A LESSER AMOUNT.

FAILURE TO COMPLY WITH ANY OF THESE TERMS AND CONDITIONS MAY RESULT IN THE LOSS OF THIS **CHANGE AUTHORIZATION:**

Witness Signature

Water Resources Division

DATE ISSUED: MARCH 20, 2008

Change Application #: 76N-30027719

THE INFORMATION SHOWN BELOW REFLECTS THE ENTIRE WATER RIGHT. AN ASTERISK (*) HAS BEEN PLACED NEXT TO EACH ITEM ALTERED BY THIS CHANGE AUTHORIZATION.

Water Right Number:

76N 81519-00

PROVISIONAL PERMIT

Version: 2 -- CHANGE AUTHORIZATION

Version Status: ACTIVE

Owners:

SALISH SHORES UTILITY CORP INC

PO BOX 1030

THOMPSON FALLS, MT 59873

Priority Date:

MAY 14, 1992 at 10:46 A.M.

Enforceable Priority Date: MAY 14, 1992 at 10:46 A.M.

Purpose (use): **Maximum Flow Rate:** **MUNICIPAL**

110.00 GPM

Maximum Volume:

48.90 AC-FT

Source Name:

GROUNDWATER

Source Type:

GROUNDWATER

*Point of Diversion and Means of Diversion:

<u>ID</u>

Govt Lot.

Qtr Sec SWNESE <u>Twp</u>

21N

21N-

21N

21N

29W

29W

29W

29W

SANDERS

SANDERS

SANDERS

SANDERS

SANDERS

Period of

JANUARY 1 TO DECEMBER 31

JANUARY 1 TO DECEMBER 31

Diversion:

Diversion Means: --WELL

Well Depth: 121.00 FEET

Static Water Level: 22.00 FEET

Casing Diameter: 6.63 INCHES

Pump Size:

20.00 HP

2

SWNESE 16

Period of: Diversion:

Diversion Means: WELL

Well Depth:

141.00 FEET Static Water Level: 21.00 FEET

Casing Diameter: 6.63 INCHES

Pump Size:

10.00 HP

SWSWSE-

Period of

JANUARY 1 TO DECEMBER 31

Diversion:

Diversion Means: WELL

Well Depth:

240.00 FEET

Static Water Level: 35.00 FEET

Casing Diameter: 6.00 INCHES

*4

SWSWSE

Period of

JANUARY 1 TO DECEMBER 31

Diversion:

Diversion Means: WELL

Well Depth:

246.00 FEET

Static Water Level: 33.00 FEET

Casing Diameter: 6.00 INCHES

*5

NESWNW --15

JANUARY 1 TO DECEMBER 31

Period of

Diversion:

Diversion Means: WELL

Well Depth:

367.00 FEET

Static Water Level: 160.00 FEET

Casing Diameter: 6.00 INCHES

*6

NESWNW

15

Period of

JANUARY 1 TO DECEMBER 31

Diversion:

Diversion Means: WELL

Well Depth:

Static Water Level: 30.00 FEET

355.00 FEET

Casing Diameter: 6.00 INCHES

7 NESWNW 15 21N 29W SANDERS

Diversion:

Period of JANUARY 1 TO DECEMBER 31

Diversion Means: WELL
Well Depth: 423.00 FEET
Static Water Level: 32.00 FEET
Casing Diameter: 6.00 INCHES

*Purpose (Use):

MUNICIPAL

Volume:

48.90 AC-FT

Period of Use:

JANUARY 1 to DECEMBER 31

*Place of Use:

<u>ID</u>	Acres Govt Lot	Qtr Sec	Sec	<u>Twp</u>	Rge	County
*1	,		15	21N	29W	SANDERS
*2	J 419 F	E2	16	` 21N	29W	SANDERS
*3		W2SW	13	21N	29W	SANDERS
*4	1.7	>	14	21N	29W	SANDERS
*5		N2N2	. 22	21N	29W	SANDERS
*6	• •	N2N2	23	21N	29W	SANDERS

ASSOCIATED RIGHT

THIS WATER RIGHT IS ASSOCIATED TO WATER RIGHT NO. 76N 85780, 76N 30016270, 76N 97278. THEY ARE A MANIFOLD SYSTEM AND HAVE OVERLAPPING PLACES OF USE.

CLARK FORK RIVER BASIN LAW

THIS PROVISIONAL WATER USE PERMIT HAS A PRIORITY DATE THAT IS JUNIOR TO THE RIGHTS OF SENIOR WATER RIGHT HOLDERS IN THE CLARK FORK RIVER BASIN. IN ACCORDANCE WITH MONTANA LAW, YOU MAY BE SUBJECT TO A CALL BY SENIOR WATER RIGHT HOLDERS, IN WHICH CASE YOU MAY BE REQUIRED TO DISCONTINUE YOUR USE OF WATER FOR THE PERIOD OF THE CALL.

GROUNDWATER WASTE & CONTAMINATION

THIS RIGHT IS SUBJECT TO SECTION 85-2-505, MCA, REQUIRING A WELL BE CONSTRUCTED SO IT WILL NOT ALLOW WATER TO BE WASTED OR CONTAMINATE OTHER WATER SUPPLIES OR SOURCES, AND A FLOWING WELL MUST BE CAPPED OR EQUIPPED SO THE FLOW OF THE WATER MAY BE STOPPED WHEN NOT BEING PUT TO BENEFICIAL USE.

GROUNDWATER WELL - ACCESS PORT

THE FINAL COMPLETION OF THE WELL(S) MUST INCLUDE AN ACCESS PORT OF AT LEAST 50 INCH SO THE STATIC LEVEL OF THE WELL MAY BE ACCURATELY MEASURED.

WATER MEASUREMENT-INLINE FLOW METER REQUIRED

THE APPROPRIATOR SHALL INSTALL A DEPARTMENT APPROVED IN-LINE FLOW METER AT A POINT IN THE DELIVERY LINE APPROVED BY THE DEPARTMENT. WATER MUST NOT BE DIVERTED UNTIL THE REQUIRED MEASURING DEVICE IS IN PLACE AND OPERATING. ON A FORM PROVIDED BY THE DEPARTMENT, THE APPROPRIATOR SHALL KEEP A WRITTEN YEARLY RECORD OF THE FLOW RATE AND VOLUME OF ALL WATER DIVERTED, INCLUDING THE PERIOD OF TIME. RECORDS SHALL BE SUBMITTED BY NOVEMBER 30 OF EACH YEAR AND UPON REQUEST AT OTHER TIMES DURING THE YEAR. FAILURE TO SUBMIT REPORTS MAY BE CAUSE FOR REVOCATION OF A PERMIT OR CHANGE. THE RECORDS MUST BE SENT TO THE WATER RESOURCES REGIONAL OFFICE. THE APPROPRIATOR SHALL MAINTAIN THE MEASURING DEVICE SO IT ALWAYS OPERATES PROPERLY AND MEASURES FLOW RATE AND VOLUME ACCURATELY.

OWNERSHIP UPDATE RECEIVED

OWNERSHIP UPDATE ID # 45878 RECEIVED 05/03/2007

County

SANDERS

Flow Rate:

SANDERS

Flow Rate:

110 GPM

210 GPM

210 GPM

Change Application #: 76N-30027719

THE INFORMATION SHOWN BELOW REFLECTS THE ENTIRE WATER RIGHT. AN ASTERISK (*) HAS BEEN PLACED NEXT TO EACH ITEM ALTERED BY THIS CHANGE AUTHORIZATION.

21N

29W

Water Right Number:

Version: 2 - CHANGE AUTHORIZATION

Version Status: ACTIVE

Qtr Sec

16

SWNESE

Owners:

SALISH SHORES UTILITY CORP INC

PO BOX 1030

THOMPSON FALLS, MT 59873

Priority Date:

JUNE 1, 1993 at 09:33 A.M.

Enforceable Priority Date: JUNE 1, 1993 at 09:33 A.M.

Purpose (use):

MUNICIPAL 210.00 GPM

Maximum Flow Rate: Maximum Volume:

104.32 AC-FT

Source Name:

GROUNDWATER

Source Type: GROUNDWATER *Point of Diversion and Means of Diversion:

Govt Lot *1 Period of JANUARY 1 TO DECEMBER 31. Diversion:

Diversion Means: WELL-Well Depth:

121.00 FEET Static Water Level: 22.00 FEET Casing Diameter: 6.63 INCHES Pump Size:

20.00 HP

Period of SWNESE JANUARY 1 TO DECEMBER 31

Diversion:

Diversion Means: WELL Well Depth:

141.00 FEET Static Water Level: 21.00 FEET Casing Diameter: 6.63 INCHES Pump Size: 10.00 HP

3

Period of SWSWSE JANUARY 1 TO DECEMBER 31 21N SANDERS Flow Rate:

Diversion:

Diversion Means: WELL Well Depth: 240.00 FEET Static Water Level: 35.00 FEET

Casing Diameter: 6.00 INCHES

Period of SWSWSE JANUARY 1 TO DECEMBER 31 Diversion: 29W SANDERS

Diversion Means: WELL

Well Depth: 246.00 FEET Static Water Level: 33.00 FEET

Casing Diameter: 6.00 INCHES *5 Period of

NESWNW JANUARY 1 TO DECEMBER 31 Diversion: 29W Diversion Means: SANDERS WELL Flow Rate:

Well Depth: 367.00 FEET

Static Water Level: 160.00 FEET Casing Diameter: 6.00 INCHES

*6 Period of

NESWNW JANUARY 1 TO DECEMBER 31 21N 29W SANDERS

Diversion:

Diversion Means: WELL

Well Depth: 355.00 FEET Static Water Level: 30.00 FEET Casing Diameter: 6.00 INCHES

Change Application #: 76N-30027719

7 NESWNW 15 21N 29W SANDERS

Period of

JANUARY 1 TO DECEMBER 31

Diversion:

Diversion Means: WELL
Well Depth: 423.00 FEET
Static Water Level: 32.00 FEET
Casing Diameter: 6.00 INCHES

*Purpose (Use):

MUNICIPAL

Volume:

104.32 AC-FT

Period of Use:

JANUARY 1 to DECEMBER 31

*Place of Use:

<u>ID</u>	Acres Govt Lot	Qtr Sec	Sec .	<u>Twp</u>	Rge	County
*1	,	1	15	21N	- 29W	SANDERS
*2		W2SW	13 :	21N	29W	SANDERS
*3			14	21N	29W	SANDERS
*4	*	E2	16	21N	29W	SANDERS
*5		N2N2	22	: 21N ~~	29W	SANDERS
*6		N2N2	23	21N -	29W	SANDERS

ASSOCIATED RIGHT

THIS WATER RIGHT IS ASSOCIATED TO WATER RIGHT NO. 76N 81519, 76N 97278, 76N 30016270. THEY ARE A MANIFOLD SYSTEM AND HAVE OVERLAPPING PLACES OF USE.

CLARK FORK RIVER BASIN LAW

THIS PROVISIONAL WATER USE PERMIT HAS A PRIORITY DATE THAT IS JUNIOR TO THE RIGHTS OF SENIOR WATER RIGHT HOLDERS IN THE CLARK FORK RIVER BASIN. IN ACCORDANCE WITH MONTANA LAW, YOU MAY BE SUBJECT TO A CALL BY SENIOR WATER RIGHT HOLDERS, IN WHICH CASE YOU MAY BE REQUIRED TO DISCONTINUE YOUR USE OF WATER FOR THE PERIOD OF THE CALL.

GROUNDWATER WASTE & CONTAMINATION

THIS RIGHT IS SUBJECT TO SECTION 85-2-505, MCA, REQUIRING A WELL BE CONSTRUCTED SO IT WILL NOT ALLOW WATER TO BE WASTED OR CONTAMINATE OTHER WATER SUPPLIES OR SOURCES, AND A FLOWING WELL MUST BE CAPPED OR EQUIPPED SO THE FLOW OF THE WATER MAY BE STOPPED WHEN NOT BEING PUT TO BENEFICIAL USE.

GROUNDWATER WELL - ACCESS PORT

THE FINAL COMPLETION OF THE WELL (S) MUST INCLUDE AN ACCESS PORT OF AT LEAST .50 INCH SO THE STATIC LEVEL OF THE WELL MAY BE ACCURATELY MEASURED.

WATER MEASUREMENT-INLINE FLOW METER REQUIRED

THE APPROPRIATOR SHALL INSTALL A DEPARTMENT APPROVED IN-LINE FLOW METER AT A POINT IN THE DELIVERY LINE APPROVED BY THE DEPARTMENT. WATER MUST NOT BE DIVERTED UNTIL THE REQUIRED MEASURING DEVICE IS IN PLACE AND OPERATING. ON A FORM PROVIDED BY THE DEPARTMENT, THE APPROPRIATOR SHALL KEEP A WRITTEN YEARLY RECORD OF THE FLOW RATE AND VOLUME OF ALL WATER DIVERTED, INCLUDING THE PERIOD OF TIME. RECORDS SHALL BE SUBMITTED BY NOVEMBER 30 OF EACH YEAR AND UPON REQUEST AT OTHER TIMES DURING THE YEAR. FAILURE TO SUBMIT REPORTS MAY BE CAUSE FOR REVOCATION OF A PERMIT OR CHANGE. THE RECORDS MUST BE SENT TO THE WATER RESOURCES REGIONAL OFFICE. THE APPROPRIATOR SHALL MAINTAIN THE MEASURING DEVICE SO IT ALWAYS OPERATES PROPERLY AND MEASURES FLOW RATE AND VOLUME ACCURATELY.

OWNERSHIP UPDATE RECEIVED

OWNERSHIP UPDATE ID # 45878 RECEIVED 05/03/2007

SANDERS

29W

SANDERS

Change Application #: 76N-30027719

THE INFORMATION SHOWN BELOW REFLECTS THE ENTIRE WATER RIGHT. AN ASTERISK (*) HAS BEEN PLACED NEXT TO EACH ITEM ALTERED BY THIS CHANGE AUTHORIZATION.

Water Right Number: 76N 97278-00 PROVISIONAL PERMIT

Version: 2 – CHANGE AUTHORIZATION

Version Status: ACTIVE

Owners:

SALISH SHORES UTILITY CORP INC

PO BOX 1030

THOMPSON FALLS, MT 59873

Priority Date:

MAY 17, 1996 at 09:01 A.M.

Enforceable Priority Date: MAY 17, 1996 at 09:01 A.M.

Purpose (use): Maximum Flow Rate: **MUNICIPAL**

440.00 GPM

Maximum Volume:

25.98 AC-FT

Source Name:

GROUNDWATER

Source Type:

GROUNDWATER

*Point of Diversion and Means of Diversion:

ID Govt Lot County Otr Sec Sec SWNESE 16 21N SANDERS

Period of

JANUARY 1...TO DECEMBER-31...

Diversion:

Diversion Means: WELL

Well Depth: 121.00 FEET Static Water Level: 22.00 FEET Casing Diameter: 6.63 INCHES Pump Size: 20.00 HP

*2

SWNESE

JANUARY 1 TO DECEMBER 31 Period of

Diversion:

Diversion Means: WELL

Well Depth: 141.00 FEET Static Water Level: 21:00 FEET Casing Diameter: 6.63 INCHES

Pump Size:

-10.00 HP

٠٠. - ٠ SWSWSE SANDERS

16

JANUARY 1 TO DECEMBER 31. Period of

Diversion:

Diversion Means: WELL 240:00 FEET Well Depth: Static Water Level: 35.00 FEET

Casing Diameter: 6.00 INCHES

SWSWSE **SANDERS**

Period of

JANUARY: 1 TO DECEMBER 31

Diversion:

Diversión Means: WELL Well Depth: 246.00 FEET

Static Water Level: 33.00 FEET Casing Diameter: 6.00 INCHES

NESWNW 5 SANDERS

15

21N

Period of

JANUARY 1 TO DECEMBER 31

Diversion:

Diversion Means: WELL

Well Depth: 367.00 FEET Static Water Level: 160.00 FEET Casing Diameter: 6.00 INCHES 10.00 HP Pump Size:

NESWNW

Period of **JANUARY 1 TO DECEMBER 31**

Diversion:

Diversion Means: WELL

355.00 FEET Well Depth: Static Water Level: 30.00 FEET Casing Diameter: 6.00 INCHES 10.00 HP Pump Size:

7 NESWNW 15 21N 29W SANDERS

Period of

JANUARY 1 TO DECEMBER 31

Diversion:

Diversion Means: WELL

Well Depth: 423.00 FEET Static Water Level: 32.00 FEET Casing Diameter: 6.00 INCHES

*Purpose (Use):

MUNICIPAL

Volume:

25.98 AC-FT

Period of Use:

JANUARY 1 to DECEMBER 31

*Place of Use:

<u>ID</u>	Acres Govt Lot	Qtr Sec	Sec	Twp	Rge	County
*1			15	21N	29W	SANDERS
*2		∕ E2 `	` 16 <i>`</i>	21N	29W	SANDERS
*3		W2SW	13	. 21N	29W	SANDERS
*4	The state of the s	* .	14	21N	29W	SANDERS
*5		N2N2	22	21N	29W	SANDERS
*6		- N2N2	-23	21N	29W	SANDERS
	- 10 gr = 20	the second secon	and the state			

ASSOCIATED RIGHT

THIS WATER RIGHT IS ASSOCIATED TO WATER RIGHT NO. 76N 30016270, 76N 85780, 76N 81519. THEY ARE A MANIFOLD SYSTEM AND HAVE OVERLAPPING PLACES OF USE.

CLARK FORK RIVER BASIN LAW

THIS PROVISIONAL WATER USE PERMIT HAS A PRIORITY DATE THAT IS JUNIOR TO THE RIGHTS OF SENIOR WATER RIGHT HOLDERS IN THE CLARK FORK RIVER BASIN. IN ACCORDANCE WITH MONTANA LAW, YOU MAY BE SUBJECT TO A CALL BY SENIOR WATER RIGHT HOLDERS, IN WHICH CASE YOU MAY BE REQUIRED TO DISCONTINUE YOUR USE OF WATER FOR THE PERIOD OF THE CALL.

GROUNDWATER WELL - ACCESS PORTS

THE FINAL COMPLETION OF THE WELL(S) MUST INCLUDE AN ACCESS PORT OF AT LEAST .50 INCH SO THE STATIC LEVEL OF THE WELL MAY BE ACCURATELY MEASURED.

WATER MEASUREMENT-INLINE FLOW METER REQUIRED

THE APPROPRIATOR SHALL INSTALL AN IN-LINE FLOW METER APPROVED BY THE REGIONAL MANAGER AT A POINT IN THE DELIVERY LINE APPROVED BY THE REGIONAL OFFICE TO RECORD THE FLOW RATE AND VOLUME OF WATER DIVERTED. WATER MUST NOT BE DIVERTED UNTIL THE REQUIRED MEASURING DEVICE IS IN PLACE AND OPERATING. ON A FORM PROVIDED BY THE DEPARTMENT, THE APPROPRIATOR SHALL KEEP YEARLY WRITTEN RECORDS OF THE FLOW RATE AND VOLUME MEASUREMENTS AND SHALL SUBMIT THE RECORDS BY NOVEMBER 30 OF EACH YEAR. THE REGIONAL MANAGER MAY ALSO REQUEST MEASUREMENT RECORDS AT OTHER TIMES DURING THE YEAR. FAILURE TO SUBMIT REPORTS MAY BE CAUSE FOR REVOCATION OR MODIFICATION OF A PERMIT OR CHANGE. THE RECORDS MUST BE SENT TO THE WATER RESOURCES REGIONAL OFFICE AT THE ADDRESS LISTED BELOW. THE APPROPRIATOR SHALL MAINTAIN THE MEASURING DEVICE SO IT ALWAYS OPERATES PROPERLY AND MEASURES FLOW RATE ACCURATELY. 3220 HIGHWAY 93 S, PO BOX 860, KALISPELL, MT 59903-0860 PH: 406-752-2288 FAX: 406-752-2843

OWNERSHIP UPDATE RECEIVED

OWNERSHIP UPDATE ID # 45878 RECEIVED 05/03/2007

Change Application #: 76N-30027719

THE INFORMATION SHOWN BELOW REFLECTS THE ENTIRE WATER RIGHT. AN ASTERISK (*) HAS BEEN PLACED NEXT TO EACH ITEM ALTERED BY THIS CHANGE AUTHORIZATION.

Water Right Number: 76N 30016270 **PROVISIONAL PERMIT**

Version: 2 - CHANGE AUTHORIZATION

Version Status: ACTIVE

Owners:

SALISH SHORES UTILITY CORP INC

PO BOX 1030

THOMPSON FALLS, MT 59873

Priority Date:

AUGUST 19, 2005 at 02:09 P.M.

Enforceable Priority Date: AUGUST 19, 2005 at 02:09 P.M.

Purpose (use): **Maximum Flow Rate:** **MUNICIPAL**

Maximum Volume:

688.50 GPM 198.10 AC-FT

Source Name: .

GROUNDWATER

Source Type:

GROUNDWATER

*Point of Diversion and Means of Diversion:

<u>ID</u>

SWSWSE

Period of

JANUARY 1. TO DECEMBER 31-

Diversion:

Diversion Means: WELL

240.00 FEET Well Depth: Static Water Level: 35.00 FEET Casing Diameter: 6.00 INCHES

Pump Size:

20.00 HP

2

SWSWSE SANDERS 15 21N

SANDERS

SANDERS

29W

🔅 JANUARY 1 TO DECEMBER 31 Period of

Diversion:

Diversion Means: `WELL

Well Depth: 246.00 FEET

Static Water Level: 33.00 FEET Casing Diameter: 6.00 INCHES

Pump Size:

10.00 HP

SWNESE 21N

JANUARY 1 TO DECEMBER 31 Period of

Diversion:

Diversion Means: WELL!

121.00 FEET Well Depth: Static Water Level: 22.00 FEET

Casing Diameter: 6.00 INCHES Pump Size:

SWNESE 16

Period of

Diversion:

Diversion Means: WELL

Well Depth: 141.00 FEET Static Water Level: 21.00 FEET

Casing Diameter: 6.00 INCHES

Pump Size:

10.00 HP

NESWNW 150 21N Period of

JANUARY 1 TO DECEMBER 31

Diversion:

Diversion Means: WELL

Well Depth:

367.00 FEET

Static Water Level: 160.00 FEET Casing Diameter: 6.00 INCHES

NESWNW 21N 29W 15 **SANDERS**

Diversion Means: WELL

Well Depth: 355.00 FEET

Static Water Level: 30.00 FEET Casing Diameter: 6.00 INCHES 7 NESWNW 15 21N 29W SANDERS

Period of

JANUARY 1 TO DECEMBER 31

Diversion:

Diversion Means: WELL

Well Depth: 423.00 FEET
Static Water Level: 32.00 FEET
Casing Diameter: 6.00 INCHES

*Purpose (Use):

MUNICIPAL

Volume:

198.10 AC-FT

Period of Use:

JANUÁRY 1 to DECEMBER 31

*Place of Use:

<u>ID</u>	Acres Govt Lot	Qtr Sec	Sec	Twp	Rge	County
*1			15	21N	29W	SANDERS
*2		E2	16	21N	29W	SANDERS
*3	- <u> </u>	W2SW	13 i	21N	29W	SANDERS
*4	1714		14	-21Ń	29W	SANDERS
*5	1 3 200	N2N2	22	- 21N	29W	SANDERS
*6		N2N2 '	. 23	21N	- 29W	SANDERS
	the second of th			, .	Land Land	* * * * * * * * * * * * * * * * * * * *

ASSOCIATED RIGHT

THIS WATER RIGHT IS ASSOCIATED TO WATER RIGHT NO. 76N 81519, 76N 85780, 76N 97278. THEY ARE A MANIFOLD SYSTEM AND HAVE OVERLAPPING PLACES OF USE.

CLARK FORK RIVER BASIN LAW

THIS PROVISIONAL WATER USE PERMIT HAS A PRIORITY DATE THAT IS JUNIOR TO THE RIGHTS OF SENIOR WATER RIGHT HOLDERS IN THE CLARK FORK RIVER BASIN. IN ACCORDANCE WITH MONTANA LAW, YOU MAY BE SUBJECT TO A CALL BY SENIOR WATER RIGHT HOLDERS, IN WHICH CASE YOU MAY BE REQUIRED TO DISCONTINUE YOUR USE OF WATER FOR THE PERIOD OF THE CALL.

GROUNDWATER WASTE & CONTAMINATION

THIS RIGHT IS SUBJECT TO SECTION 85-2-505, MCA, REQUIRING ALL WELLS BE CONSTRUCTED SO THEY WILL NOT ALLOW WATER TO BE WASTED OR CONTAMINATE OTHER WATER SUPPLIES OR SOURCES, AND ALL FLOWING WELLS SHALL BE CAPPED OR EQUIPPED SO THE FLOW OF THE WATER MAY BE STOPPED WHEN NOT BEING PUT TO BENEFICIAL USE.

GROUNDWATER WELL - ACCESS PORT

THE FINAL COMPLETION OF THE WELL(S) MUST INCLUDE AN ACCESS PORT OF AT LEAST 50 INCH SO THE STATIC LEVEL OF THE WELL MAY BE ACCURATELY MEASURED.

WATER MEASUREMENT-INLINE FLOW METER REQUIRED

THE APPROPRIATOR SHALL INSTALL A DEPARTMENT APPROVED IN-LINE FLOW METER AT A POINT IN THE DELIVERY LINE APPROVED BY THE DEPARTMENT. WATER MUST NOT BE DIVERTED UNTIL THE REQUIRED MEASURING DEVICE IS IN PLACE AND OPERATING. ON A FORM PROVIDED BY THE DEPARTMENT, THE APPROPRIATOR SHALL KEEP A WRITTEN YEARLY RECORD OF THE FLOW RATE AND VOLUME OF ALL WATER DIVERTED, INCLUDING THE PERIOD OF TIME. RECORDS SHALL BE SUBMITTED BY NOVEMBER 30 OF EACH YEAR AND UPON REQUEST AT OTHER TIMES DURING THE YEAR. FAILURE TO SUBMIT REPORTS MAY BE CAUSE FOR REVOCATION OF A PERMIT OR CHANGE. THE RECORDS MUST BE SENT TO THE WATER RESOURCES REGIONAL OFFICE. THE APPROPRIATOR SHALL MAINTAIN THE MEASURING DEVICE SO IT ALWAYS OPERATES PROPERLY AND MEASURES FLOW RATE AND VOLUME ACCURATELY.

OWNERSHIP UPDATE RECEIVED,

OWNERSHIP UPDATE ID # 45878 RECEIVED 05/03/2007

CHANGE APPLICATION CRITERIA ASSESSMENT

Application No.:	76N-30027719 Salish Shores Utility Corp INC
Date:	January 16, 2008
Final Decision Maker:	Terry Eccles
X GRANT APPLICATION	N: The findings and conclusions show that the criteria have been met.
,	N: The findings and conclusions <u>do not show</u> that the criteria have been ement of Opinion will be sent to the applicant.
	ON: The findings and conclusions <u>show</u> the criteria have been met, difications are required. A Notice and Statement of Opinion will be sent to
The following criteria must application or if the objecti	be met by an applicant. Complete this form if <u>no</u> objections were received to an ons were settled:

Application Details: This is an application to change four Provisional Water Use Permits issued for incremental phases of what is now being considered a single development in a Master Development Plan. This master plan is regulated by the Public Service Commission (PSC) for the area which is encompassed by the four subject permits containing seven wells. This change application changes the purpose of use from multiple domestic to municipal, manifolds all points of diversion as the Master Plan delineates and makes all places of use identical considered to be a general service area. Generally, four wells will be the primary diversions and the other three wells will be used for emergency and back-up purposes. The wells will serve the entire service area described as the place of use by the previously issued permits. There is no increase in the flow rate and volume of the four subject permits already issued. This application is to commingle the water in a manifold system for municipal use required by the Master Development Plan to ensure adequate service.

The following Provisional Permits are proposed to be changed or modified to municipal use and include the new point of diversion, well #7, and/or place of use: 76N-81519, POD, (wells #1 & #2), 76N-85780, POD, (wells #3 & #4), 76N-97278, POD (wells #5, #6) and 76N-30016270, POD, (wells #1 & #4).

Water Right #	Flow (gpm)	Volume ac/ft	Priority Date
76N 81519-00	110.0	48.90	5/14/92
76N 85780-00	210.0	104.32	6/01/93
76N 97278-00	440.0	25.98	5/17/96
76N 30016270	688.5	198.1	8/19/05

<u>Historic Use:</u> The applicant must prove the amount of water being changed for each water right will not exceed or increase the flow rate historically diverted under the historic use, nor exceed or increase the historic volume consumptively used under the existing use.

FINDINGS OF FACT: 76N-81519 was filed for the entire Salish Shores 1 subdivision. The permit was issued for 44-lots with a flow rate of 110 gpm and a volume of 71.72 acre-feet from 2-groundwater wells. The Project Completion Notice was due December 31, 2003 but was not timely filed, therefore the permit was revoked. On June 23, 2004 a Project Completion Notice was received and the permit was reinstated based on the evidence submitted with the project completion notice identifying what was "completed" by the original December 31, 2003 deadline. The right was reduced to 30-lots with a volume of 48.9 acre-feet. The flow rate was perfected and remains as issued for 110 gpm. Historic operation of the right consists of two wells used continually year around for the entire subdivision. The total flow rate and volume has been utilized based upon the number of homes completed, the flow and volume necessary for this number of homes and the verification that the beneficial use is reasonable and necessary to serve the domestic lots throughout the period of diversion and use.

76N-85780 was filed for Salish Shores 2 subdivision. The permit was issued for 64-lots with a maximum flow rate of 210 gpm and an annual volume of 104.32 acre-feet from 2-groundwater wells. The Project Completion Notice due date was December 31, 2009; however, all 64-lots are developed, 210 gpm has been used and the volume of 104.32 acre-feet achieved. The Project Completion Notice was received June 19, 2007 and the permit was certified confirming the flow rate,

Form No. 606-402CR R5/2007 Page 2 of 4

volume and 64-households on June 26, 2007. The total flow rate and volume has been utilized. The total flow rate and volume has been utilized based upon the number of homes completed, the flow and volume necessary for this number of homes and the verification that the beneficial use is reasonable and necessary to serve the domestic lots throughout the period of diversion and use.

76N-97278 is a permit for commercial and lawn and garden purposes for the Tradewinds Commercial Village Phase 1 and one additional lot. The permit covers a total of 11-lots with water from two wells producing a maximum flow rate of 440 gpm and an annual volume of 25.98 acre-feet. The Project Completion Notice due date was December 31, 2007; however the full flow rate and volume has been utilized and the Project Completion Notice was received on June 19, 2007. The permit was certified June 26, 2007 confirming the project was completed as proposed. The total flow rate and volume has been utilized based upon the number of homes completed, the flow and volume necessary for this number of homes and the verification that the beneficial use is reasonable and necessary to serve the domestic lots throughout the period of diversion and use.

76N-30016270 is a permit issued for the 14-lots that were lost from permit 76N-81519 when the Project Completion Notice was missed and an Extension of Time was not filed. The permit is for increased and combined usage of the four wells permitted by 76N-81519 and 76N-85780. The total increased amount of water is 688.5 gpm and 198.1 acre-feet from all four wells combined. The permit is also for future use that was proposed in the original application. Most of the new uses have not yet been developed, but the wells are fully operational and have been used continuously year around for the developments completed to date. The permit application included extensive pump tests for all four wells and each well is capable of providing the full extent of the proposed future uses. The Project Completion Notice is not due until December 31, 2021 and the Project Completion Notice for this Change Authorization will be correlated with that date.

CONCLUSIONS OF LAW: Department administrative rulings have held that a water right in a change proceeding is defined by actual beneficial use, not the amount claimed or even decreed. <u>In the Matter of Application for Change Authorization No. G(W)028708-41I by Hedrich/Straugh/Ringer, December 13, 1991, Final Order; In the Matter of Application for Change Authorization No. 008323-g76L by Starkel/Koester, April 1, 1992, Final Order.</u>

The historic flow rate and volume are supported by a preponderance of the evidence and define the actual beneficial use.

<u>Adverse Affect:</u> The applicant must prove the proposed change in appropriation right will not adversely affect the use of the existing water rights of other persons or other perfected or planned uses or developments for which a permit or certificate has been issued or for which a state water reservation has been issued.

FINDINGS OF FACT: The Department has permitted all of the water rights proposed to be changed. The proposed change is to combine the individual systems into one manifold Public Water Supply mandated by the PSC that serves the entire project area. The individual permits were issued for specific portions of the development. Due to the development of the Master Plan a revised water right is being requested through this proposed change. The change is for the maximum combined flow rate and volume of the existing Provisional Permits. The manifold system combining the water rights to cover the entire project area will not adversely affect any existing water rights or other perfected or planned uses and no State water reservations have been issued in this area. The water will be used as described and utilized historically. Combining the water rights into one manifold system to coincide with the Master Development Plan will not cause or create an avenue that will enhance the possibility for adverse affect. The consolidation of the water rights will make it easier to measure and monitor the actual use of water.

The applicant is requesting a consolidation of water rights of which the individual water being changed has been used for the beneficial purposes and developments to which they were permitted. The proposed changes are to combine the water rights to coincide with the Master Development Plan and accurately permit the future uses as outlined in the Plan. There will be no adverse impact because there is really no "change in the overall usage as currently permitted. The wells will be incorporated into a manifold system to more efficiently serve the current developments and the proposed future developments. There will be no increase in the flow rate or volume of the four subject permits already issued. The proposed change is for the maximum combined flow and volume of the exiting permits.

CONCLUSIONS OF LAW: Applicant has proven that the proposed change in appropriation right will not adversely affect the use of the existing water rights of other persons or other perfected or planned

Form No. 606-402CR R5/2007 Page 3 of 4

uses or developments for which a permit or certificate has been issued or for which a state reservation has been issued. Mont. Code Ann. § 85-2-402(2)(a).

<u>Adequacy Of Appropriation Works:</u> The applicant must prove, except for a lease authorization pursuant to 85-2-436 or a temporary change in appropriation right authorization to maintain or enhance streamflows to benefit the fishery resource pursuant to 85-2-408, the proposed means of diversion, construction, and operation of the appropriation works are adequate.

FINDINGS OF FACT: The means of diversion are 7-wells constructed to the Board of Water Well Contractor standards and approved by the Department of Environmental Quality. The wells are properly grouted and submersible pumps are installed. It is an engineered system that operates on demand for a municipal water supply. Public water supply wells of this type must comply with many construction standards. The proposed means of diversion, construction and operation of the system are adequate to divert and supply the proposed service area.

CONCLUSIONS OF LAW: Applicant has proven that the proposed means of diversion, construction and operation of the appropriation works are adequate. Mont. Code Ann. § 85-2-402(2)(b).

<u>Beneficial Use:</u> The applicant must prove the proposed use of water is a beneficial use and that the flow rate and volume are the amounts of water needed to sustain the proposed beneficial use.

FINDINGS OF FACT: The purpose of use is municipal which is recognized as a beneficial use by Montana Water Law §85-2-102(2)(a) MCA. "Municipal Use" means water appropriated by and provided for those in and around a municipality and/or and unincorporated town. The Salish Shores Utility Corp. Inc. is a public utility corporation under the control of the Public Service Commission. The Corporation serves the people within the general service area, which is near the town of Thomson Falls. The proposed amounts of water have all previously been permitted by the Department and considered reasonable for the proposed purpose at the time the permits were granted. Three of the four permits have Project Completion Notices on file with the Department providing evidence the water rights are perfected and reasonable for the purpose intended. The fourth permit was deemed reasonable at the time of issuance and has a project completion due date of December 31, 2021. This Change Authorization will have a Project Completion Notice due date that bears this same date.

The applicant shall install a department approved in-line flow meter at a point in the delivery line approved by the department. The applicant has agreed to this condition as noted in a notice and statement of opinion that was signed June 1, 2007 which will become a part of this permit.

This application is for a designated municipality and the wells will serve the entire proposed service area. The use is being described as municipal. Salish Shores Utility Corp. Inc. is a public utility corporation under the control of the Public Service Commission.

CONCLUSIONS OF LAW: Applicant has proven that the proposed use of water is a beneficial use and that the flow rate and volume are the amounts of water needed to sustain the proposed beneficial use. Mont. Code Ann. § 85-2-402(2)(c).

<u>Possessory Interest:</u> The applicant must prove, except for a lease authorization pursuant to 85-2-436 or a temporary change in appropriation right authorization pursuant to 85-2-408, the applicant has a possessory interest, or the written consent of the person with the possessory interest, in the property where the water is to be put to beneficial use.

FINDINGS OF FACT: This application is for instream flow, sale, rental, distribution, or is a municipal use application in which water is supplied to another. It is clear that the ultimate user will not accept the supply without consenting to the use of water. The applicant has possessory interest in the property where the water is to be put to beneficial use or has the written consent of the person having the possessory interest.

CONCLUSIONS OF LAW: The Applicant has proven a possessory interest in the property where water is to be put to beneficial use. Mont. Code Ann. § 85-2-311(1)(e). See also ARM, 36.12.1802

<u>Salvage Water:</u> If the change in appropriation right involves salvaged water, the proposed watersaving methods will salvage at least the amount of water asserted by the applicant. The application does not involve salvaged water. Mont. Code Ann. § 85-2-402(2)(e).

<u>Water Quality Issues:</u> The applicant must prove that the water quality criteria have been met only if a valid objection is filed. The water quality of a prior appropriator will not be adversely affected or the

Form No. 606-402CR R5/2007 Page 4 of 4

ability of a discharge permit holder to satisfy effluent limitations of a permit issued in accordance with Title 75, chapter 5, part 4, will not be adversely affected. No objections relative to water quality or the ability of a discharge permit holder to satisfy effluent limitations of the permit holder were filed against this Application.

Public Notice: The Application was properly noticed pursuant to Mont. Code Ann. §85-2-307.

<u>Environmental Assessment</u>: The Environmental Assessment prepared by the Department for this Application was reviewed and is included in the application file.

ATTACHMENT D AQUIFER TESTING ADDENDUM – FORM 606-ATA

Form 606-ATA Attachments:

- ATA.1.a Variance Request Form 653
- ATA.2.a Proposed POD Map
- ATA.2.b Well Log
- ATA.2.c Form 633 (see Excel file)
- ATA.2.d-3.h Narrative Responses
- Attachment 1 Geomatrix Hydrogeologic Summary Report (2005)





ARM 36.12.121

Complete this addendum if the source of water for a Beneficial Water Use Permit or Water Right Change application is groundwater. Check the box denoting the information is attached or data was collected following minimum testing procedures. On a separate document, address the required information. Attachments must be labeled as shown in the sections below (i.e., ATA.3.a).

Section 1. Attachments must make specific reference to the section item shown.

VARIANCE INFORMATION:

ATA.1.a The Applicant submitted a variance request per ARM 36.12.123 for a variance from the requirements of ARM 36.12.121 and has provided a copy of the written request.

Section 2. Attachments must make specific reference to the section item shown.

MINIMUM INFORMATION THAT MUST BE SUBMITTED WITH APPLICATIONS:

- **ATA.2.a** Provide a map with labeled location of production and observation wells.
- **ATA.2.b** Provide well logs of production and observation wells.
- **ATA.2.c** Provide Form No. 633, in electronic format, with all information and data provided.
- **ATA.2.d** Provide a description of testing methods and quality of the aquifer test and data.

Section 3. Attachments must make specific reference to the section item shown.

MINIMUM TESTING PROCEDURES:

For any of the following, if the answer is "NO" or "NA", provide information explaining why on a separate attachment.

- **ATA.3.a** YES NO □ NA □ Pumping was maintained throughout the duration of the test and the rate did not depart from the average pumping rate by more than 5%.
- **ATA.3.b** YES □ NO □ NA The average pumping rate is equal to or greater than the proposed flow rate if the application is for one well or if the total proposed rate for multiple wells can be obtained from a single well.
- ATA.3.c YES NO □ NA □ The proposed pumping rate was demonstrated by testing multiple wells, and 3.e was met by one well and the remaining flow rate demonstrated by eight-hour drawdown and yield tests on additional production wells under 3.e.ii and 3.e.iii.
- **ATA.3.d** YES NO □ NA □ The pumping rate was measured with a reliable measuring device and recorded with clock time according to the schedule on Form No. 633.



Aquifer Testing Addendum 1

ATA.3.e YES ■ NO □ NA □ The duration of pumping during an aquifer test was at least 24 hours for a proposed pumping rate and volume equal to or less than 150 gpm or 50 acre-feet, or at least 72 hours for a proposed pumping rate and volume greater than 150 gpm or 50 acre-feet. i. If a variance from 3.e was granted, at a minimum, eight-hour drawdown and yield tests were completed on all new production wells. ii. In addition to 3.e, if more than one new production well is proposed, at a minimum, eight-hour drawdown and yield tests were completed on all subsequent new production wells. iii. The testing procedures for a minimum eight-hour drawdown and yield test performed on any production well followed 3.a, 3.d, and 3.h. ATA.3.f YES □ NO □ NA ■ One or more observation wells were completed in the same source aquifer as the proposed production well and close enough to the production well so that drawdown is measurable and far enough away so that well hydraulics do not affect the observation well. YES□ NO□ NA■ Background groundwater levels in the production well and observation ATA.3.g well(s) were monitored at frequent intervals for at least two days prior to beginning the aquifer test according to Form No. 633. ATA.3.h YES ■ NO□ NA□ Water levels in the production well and observation well(s) were reported with 0.01-foot precision according to the schedule specified on Form No. 633 (8-hour drawdown and yield test only need to provide water levels for drawdown; no background and recovery data are necessary).



INSTRUCTIONS

Use this form to request a variance from the requirements of ARM 36.12.121 or 36.12.1702, as provided for in ARM 36.12.123.

Submit this completed form to the appropriate regional office by the deadline established during the preapplication meeting or, if a preapplication meeting is not held, include this request with your filed application or as part of a deficiency response.


For Department Use Only	
RECEIVED DNRC Water Resources	
JAN 2.1 2025	
Kalispell Unit	
Application # 30165123 Basin 76 N Received Date 1.21.25 Received By	

Applicant Name SALISH SHORES UTILITY CORP			
Mailing Address PO Box 1030			
City THOMPSON FALLS	State MT	_ Zip	59873-1030
Home Phone	Other Phone 406	-531-0801	
Email: TODD WAKEFIELD twakefield58@gmail.com	4.104		
Representative Name (if other than Applicant)			
■ Representative is Consultant □ Representative is Attorney	☐ Representative	is Other (des	scribe)
Mailing Address Bryan Gartland, Aspect, PO Box 134			
City Helena	State MT	Zip	59624
Home Phone	Other Phone 406	-599-7840	
Email: Bryan.Gartland@aspectconsulting.com			
Identify from which section(s) of ARM 36.12.121 or 36.12.1702 full list of requirements in these sections.	2 you are requestin	g a variance	. Refer to the rule for a
 ■ ARM 36.12.121 Aquifer Testing Requirements (2)(a) map with labeled location of production and (2)(b) well logs of the production and observation (2)(c) Form No. 633, in electronic format, with all id (3)(a) pumping rate may not depart from the average of the production and observation (3)(b) average pumping rate equal to or greater the total proposed rate for multiple wells can be (3)(c) proposed pumping rate may be demonstrated the remaining flow rate is demonstrated by under (e)(i)(i) (3)(d) pumping rate must be measured with a reliation of pumping during an aqueous volume equal to or less than 150 GPM or 50 AF (3)(e) minimum duration of pumping during an aqueous equal to or less than 150 GPM or 50 AF (3)(e)(i) at a minimum an eight-hour drawdown are (3)(e)(ii) In addition to (e), if more than one new pand yield test is required on all subsequeous (3)(e)(iii) the testing procedures for a minimum eigent follow (a), (d), and (h) (3)(f) one or more observation wells must be comand close enough to the production well on or affect the observation well (3)(g) background groundwater levels in the production and/or intervals for at least two days prior to begin (3)(h) groundwater levels in the production and/or 	wells information and data page pumping rate by man the proposed flow obtained from a singled by testing multiple eight-hour drawdown able measuring device uifer test must be 24 h 0 AF, or 72 hours for and yield test is required roduction well is proposent new production well ght-hour drawdown and pleted in the same southat drawdown is measured that drawdown is measured that drawdown is measured that drawdown and observaning the aquifer test a	nore than +/- 5 rate if the apple e well wells as long a and yield tests and recorded cours for a prop proposed pure d on all new prop sed, at a mining lls d yield test per urce aquifer as surable and far ation well(s) m ccording to the	ication is for one well or if the as (e) is met by one well and on additional production wells with clock time according to posed pumping rate and uping rate and volume greater adduction wells mum an eight-hour drawdown arformed on any production well the proposed production well ar enough that well hydraulics that be monitored at frequent as Form No. 633



Explain the specific variance you are requesting and the reason for requesting it. Also identify your proposed alternative testing methodology or aquifer test data, if applicable. Attach additional sheets if necessary.
(3)(h) We did not report pumping period water levels "according to the schedule specified on Form
No. 633"; rather, we reported water levels more frequently than required.
ARM 36.12.1702 Physical Surface Water Availability (1)(b) at a minimum, three measurements that reflect high, moderate, and low flows during the period of diversion (4) once monthly measurements at department-approved intervals during the proposed period of diversion Explain the specific variance you are requesting and the reason for requesting it. Also identify your proposed alternative
measurement methodology, if applicable. Attach additional sheets if necessary.



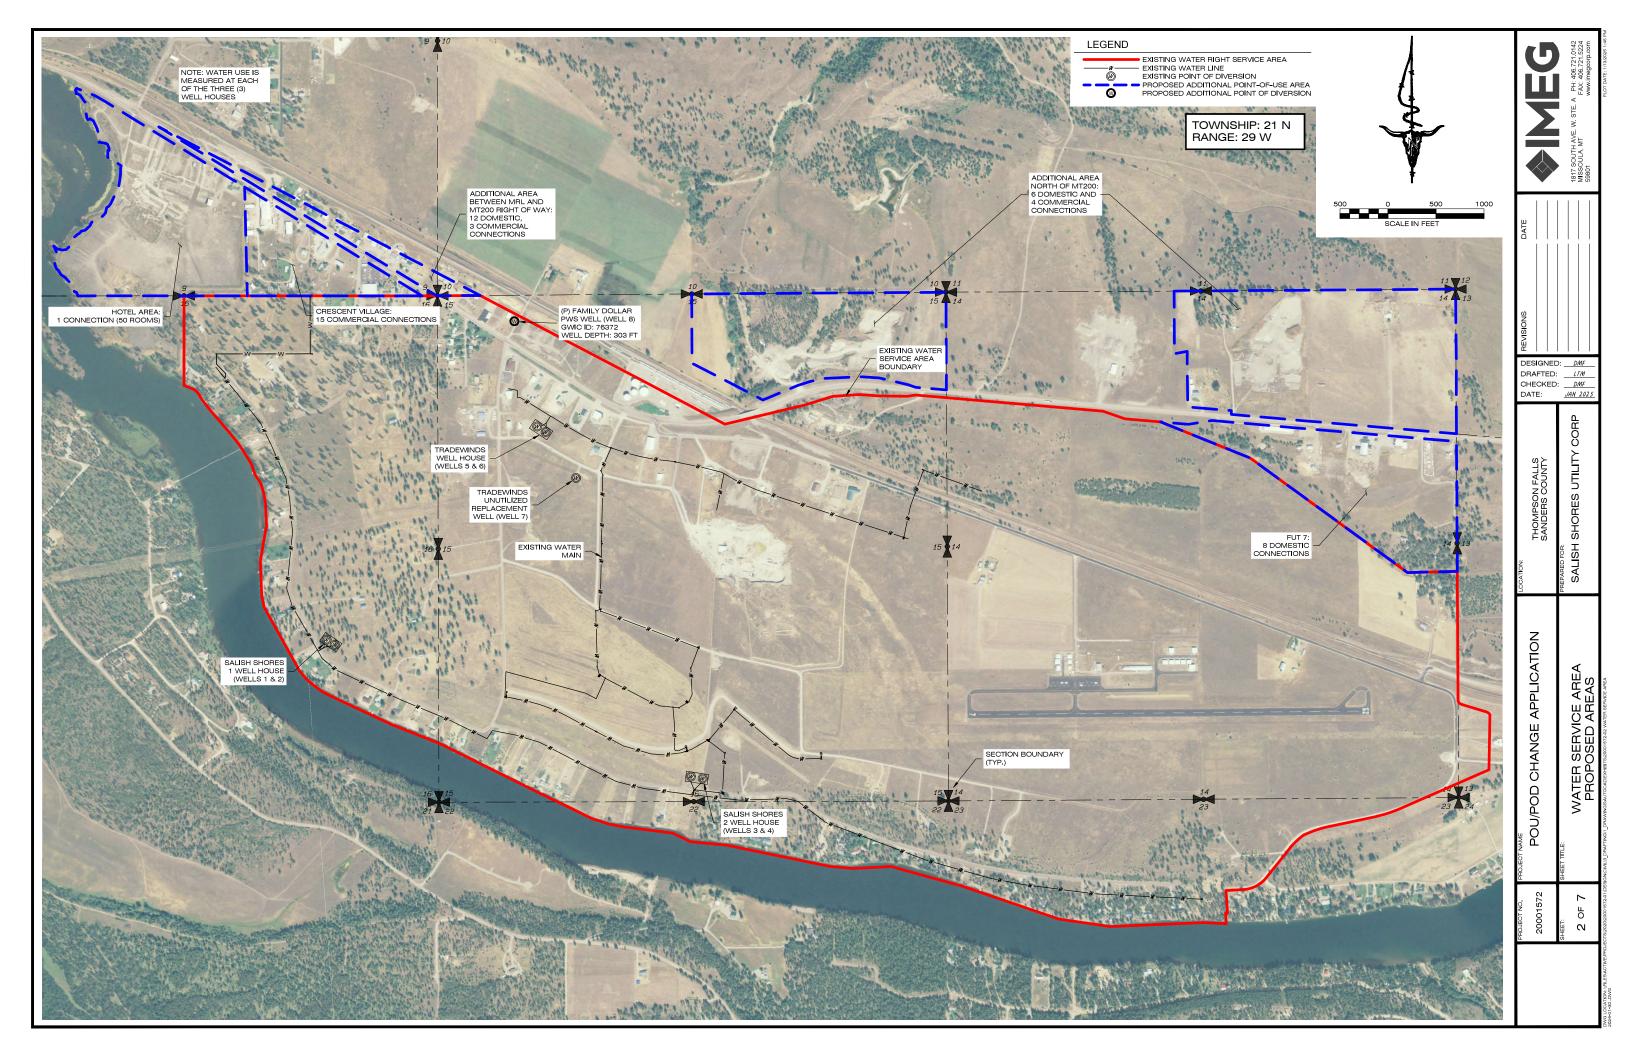

Section 7: Well Test Data

Total Depth: 303

Yield 50 gpm.

Static Water Level: 75

Unknown Test Method *

Pumping water level <u>100</u> feet. Time of recovery <u>hours</u>. Recovery water level <u>feet</u>.

Water Temperature:

MONTANA WELL LOG REPORT

This well log reports the activities of a licensed Montana well driller, serves as the official record of work done within the borehole and casing, and describes the amount of water encountered. This report is compiled electronically from the contents of the Ground Water Information Center (GWIC) database for this site. Acquiring water rights is the well owner's responsibility and is NOT accomplished by the filing of this report.

Other Options

Return to menu Plot this site in State Library Digital Atlas Plot this site in Google Maps View scanned well log (7/14/2009 2:32:43 PM)

Site Name: HOMESTEAD ENTERPRISE

GWIC Id: 76372

Section 1: Well Owner(s)

1) HOMESTEAD ENTERPRISE (MAIL)

RT. #3 BOX 10

THOMPSON FALLS MT 59873 [12/12/1979]

Section 2: Location

Township	Range	Section	Quarter Sections
21N	29 W	15	NW1⁄4
C	County		Geocode

SANDERS

Latitude	Longi	tude	Geomethod	Dat	um
47.582024	-115.30	6593	TRS-SEC	NAI	083
Ground Surface	Altitude	Ground	d Surface Method	Datum	Date

* During the well test the discharge rate shall be as uniform as possible. This rate may or may not be the sustainable yield of the well. Sustainable yield does not include the reservoir of the well casing.

Addition Block Lot

Section 3: Proposed Use of Water

COMMERCIAL (1)

Section 4: Type of Work

Drilling Method: FORWARD ROTARY

Status: NEW WELL

Section 5: Well Completion Date

Date well completed: Wednesday, December 12, 1979

Section 6: Well Construction Details

Borehole dimensions					
From	То	Diameter			
0	303	6			

From	То		Wall Thickness	Pressure Rating	Joint	Туре
-1	303	6				STEEL

Completion (Perf/Screen)

I			, , , , , , , ,	# of	Size of	
	From	То		l" •.		Description
	303	303	6			OPEN BOTTOM

Annular Space (Seal/Grout/Packer)

From	To		Cont. Fed?
1 10111	10	Description	ı cu:
0	30	SAND AND CLAY	

Section 8: Remarks

Section 9: Well Log Geologic Source

Unassigned

Unassigned				
То	Description			
1	SOIL			
40	BOULDERS AND SAND			
165	FINE SAND, SEEPAGE			
	CLAY, SAND, SEEPAGE			
303	GRAVEL, SAND, CLAY AND WATER			
	To 1 40 165 298			

Driller Certification

All work performed and reported in this well log is in compliance with the Montana well construction standards. This report is true to the best of my knowledge.

Name: EUGENE KANE

Company: KANE WELL DRILLING & PUMP SERVICE

License No: WWC-23
Date Completed: 12/12/1979

Form 606-ATA Narrative Responses Salish Shores Change Application 76N 30165123 January 10, 2025

ATA.2.d

The applicant conducted an 8-hour adequacy of diversion pumping test on the proposed point of diversion (Well 8). ATA.2.c presents the test data. The average pumping rate was approximately 170 gpm. The quality of the test and data are sufficient for the objective of demonstrating adequacy of diversion for this change application.

ATA.3.a

Form 633 documents an average pumping rate of approximately 170 gpm. Over the 8-hour pumping period, the pumping rate varied -5.4% (which rounds to -5%) to +3.4%. The pumping rate data meets the criteria for ATA.3.a.

ATA.3.b

Not applicable. Well 8 is a redundant backup well.

ATA.3.c

Attachment 1 presents Geomatrix (2005) which documents 72+ hour pumping tests on Salish Shores' Wells No. 1 and 3 (GWIC IDs 135335 and 139319, respectively). In an email dated September 22, 2023, Melissa Brickl of the WSB indicated that, although Form 633s do not exist for the 2005 Wells No. 1 and 3 pumping tests, Geomatrix (2005) and the pumping test data presented therein are substantial and credible and can be used to establish aquifer properties. In that email, the WSB instructed this applicant to conduct an 8-hour drawdown and yield test on the proposed additional POD, and to submit the data on Form 633

ATA.3.e

See response above to ATA.3.c.

ATA.3.f

Observation well monitoring not required for an 8-hour drawdown and yield test.

ATA.3.g

Background water level monitoring not required for an 8-hour drawdown and yield test.

ATA.3.h

We did not report pumping period water levels "according to the schedule specified on Form No. 633"; rather, we reported water levels more frequently than required.

HYDROGEOLOGIC SUMMARY REPORT SALISH SHORES PUBLIC WATER SUPPLY

Thompson Falls, Montana

Prepared for:

Leufkens Company

P.O. Box 1030 Thompson Falls, Montana 59873

Prepared by:

Geomatrix Consultants, Inc.

1001 S. Higgins Ave, Building B Missoula, Montana 59801 (406) 542-0129

August 2005 Revised September 2005

WORK COPY

Project No. 10730.001

TABLE OF CONTENTS

		Page
1.0	NTRODUCTION	1
2.0	IYDROGEOLOGIC SETTING	1
3.0	QUIFER TESTING	6 6 6
4.0	ATA ANALYSIS 1 BACKGROUND MONITORING 2 AQUIFER TEST RESPONSES 3 RESULTS	7 7
5.0	VATER QUALITY MONITORING	12
6.0	XISTING RIGHTS AND PROJECTED WATER NEEDS	12
7.0	ROUNDWATER MODELING	13 15
8.0	ALCULATION OF GROUNDWATER FLUX AND LEGAL AVAIALBLITY 1 POTENTIAL FOR ADVERSE EFFECTS	
9.0	EFERENCES	
	TABLES	
Table	Summary of Information for Wells Near the Salish Shores PWS	5
Table	Sequence of Aquifer Testing, Flow Rates, and Test Durations	6
Table	Summary of Water Quality Results – Salish II Wells	1 12
Table	Summary of Existing Water Rights for Salish Shores PWS	12
Table	Projected Water Demand for Buildout of Parcels to be	
'ተ' ል 1-1 -	Supplied by Salish Shores PWS	14
Table	Transient Pumping Inputs Clark Fork River Water Rights Downstream of Salish Shores PWS	15
Table	Clark I olk livel water lughts Downstream of Sansh Snotes PWS	23

FIGURES

Figure 1	Location Map	3
Figure 2	Current and Future Supplied Parcels, Salish Shores PWS	4
Figure 3	Drawdown in Well 3 During Well 4 Test Matched to Theis and Hantush Solutions	10
Figure 4	Model Grid and Boundary Conditions	16
Figure 5	Simulated Drawdown in Well 4 after 72 Hours of Pumping in Well 3	17
Figure 6a	Simulated Drawdown in Wells 1 and 3 Caused by Pumping in Wells 1 and 3	18
Figure 6b	Simulated Drawdown in Nearby Wells (WR1 through WR3)	18
Figure 7a	Simulated Maximum Drawdown Contours (Zone of Influence) at the End of the	
	Irrigation Period	19
Figure 7b	Simulated Maximum Drawdown Contours (Zone of Influence) at the End of the	
	Period of Diversion	20

APPENDICES

Appendix A	Well Logs
Appendix B	Time-Drawdown Plots
Appendix C	Summary of Groundwater Rights Within Zone of Influence
Appendix D	

1.0 INTRODUCTION

The Leufkens Company is proposing to develop several parcels of land east of Thompson Falls, Montana (Figure 1). This report summarizes hydrogeologic information needed to support a Montana Department of Natural Resources and Conservation (DNRC) Application for Beneficial Water Use Permit (Form 600 and Criteria Addendum A) to supply water for the planned development.

The Salish Shores Utility Corporation currently operates a Public Water Supply (PWS) MT0003911 that provides water to Salish Shores 1 and Salish Shores 2 subdivisions in Thompson Falls. The Salish Shores PWS is a community non-transient system. The Montana Department of Environmental Quality (DEQ) prepared a Source Water Delineation and Assessment Report for the Salish Shores PWS in January 2005 (Herrick 2005).

Two pairs of production wells serve the Salish Shores PWS: Wells 1 and 2 serve Salish Shores 1 and Wells 3 and 4 serve Salish Shores 2 (Figure 2). Wells 3 and 4 are located approximately 4,000 feet west southwest of Wells 1 and 2 (Figure 2). During normal operation the wells alternately pump between each well in the respective pair. Wells 1 and 2 are 138 feet apart and Wells 3 and 4 are separated by 59 feet. Wells 1, 2, 3, and 4 are completed at total depths of 121, 141, 240, and 246 feet below ground surface (bgs), respectively. The wells are constructed of open-ended, 6-inch diameter steel casing with no perforations.

Two existing water rights cover 30 lots in Salish Shores 1 and all of Salish Shores 2. The Leufkens Company is seeking a third appropriation to supply water to the following existing and proposed developments:

- 14 existing residential lots in Salish Shores 1
- 2 existing lots just north of Salish Shores 2
- 28 residential lots in the proposed Salish Shores 3 subdivision
- 80 residential lots in the proposed Salish Shores 4 subdivision
- 20 residential lots for Airport housing
- 30 residential lots in the proposed Salish Bluffs East subdivision
- 40 commercial connections in the Tradewinds subdivision
- 10 commercial connections for the airport

This report includes descriptions of methods and results of aquifer tests performed on the four existing Salish Shores PWS wells. Data collected during the tests are necessary to meet DNRC requirements for an Application for Beneficial Water Use Permit to supply water to the parcels described above.

2.0 HYDROGEOLOGIC SETTING

The subject area is located in the Clark Fork River Valley immediately north of the Clark Fork River. The Valley is a northwest trending intermontane basin bounded by the Cabinet Mountains to the north and Coeur d'Alene Mountains to the south. The subject area is on a broad river terrace between the Clark Fork River and Cabinet Mountains. Several unconfined sand and

gravel aquifers of high transmissivity are present in the Clark Fork River Valley near Thompson Falls (Herrick 2005). Groundwater flow is from the mountains toward the river at the valley margin and then shifts parallel to the river near the river.

Table 1 is a summary of water well information in three sections (15, 16, and 17) of Township 21 North, Range 29 West that make up the river terrace north of the Clark Fork River surrounding the Salish Shores PWS wells. This information was obtained from the Ground-Water Information Center (GWIC) website (www.mbmgwic.mtech.edu) maintained by the Montana Bureau of Mines and Geology (MBMG). Well depths in the area range from 34 to 424 feet bgs and well yields range from 10 to 750 gallons per minute (gpm). Lithologic descriptions provided for many of these wells are highly variable, but layers of sand and gravel, clay, and gravel with clay were noted.

The four wells (Wells 1 through 4, Figure 2) comprising the Salish Shores PWS are all located within a few hundred feet of the Clark Fork River (Figure 2). According to Herrick (2005) the Salish Shores PWS wells pump water from a confined aquifer. Well logs for the four wells (Appendix A) indicate that there is 100 to 200 feet of silt/clay above the aquifer in these locations. According to Herrick (2005), this confining unit is laterally extensive, and the confined aquifer is overlain by an extensive shallow unconfined aquifer.


To investigate to nature and extent of the fine-grained unit present beneath the shallow unconfined aquifer, Geomatrix examined all of the well logs available through GWIC in sections 15 and 16 (within the above referenced township and range). Out of a total of 34 well logs inspected, only 6 do not show any clay encountered during drilling. These wells are located within section 16 on the opposite side of the Clark Fork River from the Salish Shores subdivision (Figure 2). In the remaining 28 logs, the depth at which clay is encountered and the thickness of the clay layer(s) is highly variable; suggesting that the silt/clay unit(s) encountered in the Salish Shores wells may be discontinuous. The stratigraphy is likely highly variable, consisting of multiple sand and gravel water-bearing units segregated by semi-continuous low-permeability silts and clays.

The driller's log for the "Replacement" well (Appendix A), which is located approximately 3,000 feet northeast of Wells 1 and 2 (Figure 2), indicates that at this location the upper 50 feet of subsurface material consists of sand and gravel. From 50 to 426 feet bgs layers of clay and silty sand were encountered. A gravel and boulder water-bearing zone was encountered from 415 to 423 feet bgs.

The aquifer intercepted by the four wells in the Salish Shores PWS is bounded by bedrock of the Belt Supergroup below and at the valley margins. According to Herrick (2005), depth to bedrock near Thompson Falls is thought to be 400 feet. Bedrock was not encountered at a depth of 423 feet bgs at the replacement well. However, shale was reportedly encountered in the Giles Gates well (Table 1) between 260 and 424 feet bgs.

3.0 AQUIFER TESTING

Pumping tests were performed on each of the existing Salish Shores PWS wells to evaluate the hydraulic response of the aquifer to pumping these wells. Aquifer testing was performed from April 20 to May 2, 2005. The following subsections describe the implementation of testing procedures, data acquisition, data analysis, and results.

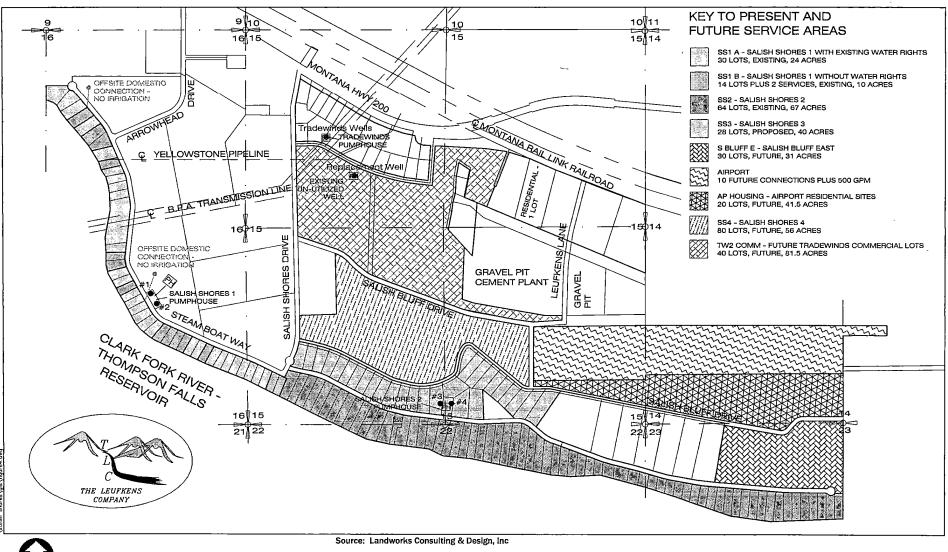



Points of Diversion

Other Wells

#1 Public Water Supply Well

Table 1. Summary of Information for Wells Near the Salish Shores PWS

GWIC#	DNRC Water Right Number									
76371	Number	Original Owner MURRAY O.J.	Location 21N29W15ACBB	Ver?	Td	Pwl	Swl	Yeild .	Date	Use
10011		WORK (A.) 0.3.	Z IIVZSVV IJACBB	100			30	700	1/1/1919	DOMESTIC
76375		GREEN GEORGE	21N29W15BBB	NO			334	160	4/4/4050	STOCKWATER DOMESTIC
76380		MURRAY O.J.	21N29W16AAA	NO	34	29	28	30		DOMESTIC
76368		MILLER J.G. & F.K.	21N29W14CBB	NO	36		34	30		DOMESTIC
142580		BLUELL MARK &	21N29W15	NO	40			27		DOMESTIC
149182	92294	J & M CONSTRUCTION	21N29W15BBB	NO	40		-	27		DOMESTIC
<u>76374</u>		ZIMMERMAN KLAR	21N29W15BB	NO	40	*************	32	10		DOMESTIC
76378		OLIVER EARL C & A D	21N29W16	. NO	. 55		37	15		DOMESTIC
										IRRIGATION
<u>189684</u>		OWEN SCOTT	21N29W16DCB	NO	60		21	50	3/5/2001	DOMESTIC
205786		GORDON TAMARA C	21N29W16DCB	NO	60	3.6.2	13.83	60	5/15/2002	DOMESTIC
214460		MONTOURE, KEN	21N29W16ACBD	NO	60		18	35		DOMESTIC
76373		EGGENSPERGER K.A.	21N29W15BB	, NO	64	55	44	20	1/1/1962	DOMESTIC
<u>76377</u>		PYATT JOHN	21N29W15CC	NO	65	60	45	750	1/1/1958	DOMESTIC
	C076918-00	DOYLE JAMES AND	21N29W14ADD	NO.	77		64	6	11/17/1990	DOMESTIC
<u>76367</u>		FAGAN FRED	21N29W14ABB	NO	86	72	62	5	1/1/1987	DOMESTIC
205787		SMITH MONTY	21N29W16DC	- NO	.90	- range manage respec	55	. 40		DOMESTIC
137575	***	JACOBI DALE	21N29W14	NO	95	90		7.5		DOMESTIC
148525	93062	OLIVER DONALD E	21N29W16DCB	NO	100			35		DOMESTIC
168521		OLIVER DONALD	21N29W16DDC	NO	100	65	55	30		DOMESTIC
132996 135336	81519	HAMILTON T J AND LEUFKIN BUD & JUDY	21N29W14AA	NO	110		75	1.3		DOMESTIC
199990	01019	(Salish Shores Well 1)	21N29W16DAC	, NO	121	30	22	50	4/8/1992	
189687		MANIN BETHANNE AND	21N29W16DCC	NO	140		92	40	5/8/2001	DOMESTIC
<u>205783</u>		COCKRELL PAUL	21N29W16CDA	÷ NO	140	100	92	75		DOMESTIC
209268		RICHARDSON DIANE	21N29W16DCC	NO	140		93	30	2/21/2004	DOMESTIC
<u>211461</u>			21N29W16DCC	NO	140		23	100	4/1/2004	DOMESTIC
<u>211463</u>			21N29W16DCC	NO	140		23	100	4/1/2004	DOMESTIC
217263		SMITH, PHYLLIS M. &	21N29W16CDA	NO	** 140		65	40	3/21/2005	DOMESTIC .
<u>131977</u>		Shores 2)	21N29W16DAC	NO	141	60	21	100	7/14/1992	TEST WELL
<u>139316</u>	311.00	HILLCREST RANCHES	21N29W15ABC	- NO	182	170	33	. 20	6/30/1993	DOMESTIC
<u> 152760</u>		HINCHCLIFFE RON	21N29W15BC	NO	222		50	100	7/7/1995	DOMESTIC
139319		Shores Well 3)	21N29W15DCC	NO	240	60	35	250	6/10/1993	DOMESTIC TEST WELL
<u>139594</u>	89272	VON-HEEDER CHIP	21N29W16ABD	NO	240	220	62	10	10/27/1993	UNKNOWN
, <u>139318</u>		LEUFKENS BUD (Salish Shores Well 4)	21N29W15DCC	NO	246	40	33	50	6/13/1993	DOMESTIC TEST WELL
<u>175586</u>		WOOD GRANGER	21N29W16AA	NO	260		60	20	7/11/1999	
76372		HOMESTEAD ENTERPRISE	21N29W15B	NO	303	. 100	75	50	1/1/1979	PUBLIC WATER SUPPLY
<u>168520</u>		DOTY MICHAEL	21N29W15AC	NO.	306		24	30	11/13/1998	DOMESTIC
139317		PETROLANE **	21N29W15BB	NO	313	45	42	35		INDUSTRIAL
<u>208358</u>		RESLER AMY	21N29W15BB	NO	314		44	75		DOMESTIC
76376		KUNTZ RON	21N29W15BBC	NO	327	55	48	50	1/1/1986	DOMESTIC
<u>160492</u>	99866	OLIVER DONALD	21N29W16BB	NO	340	330	40	10	-111-00	DOMESTIC
180434		LUNDGRESS CLARK	21N29W16BDB	. 20	340		30	-10	Total Control of the	DOMESTIC
<u>175632</u>		THE LEUFKENS CO	21N29W15BC	NO	355	150	30	200	7/31/1997	
76379	82532	OLIVER EARL	21N29W16BB	: NO	360		35	5		DOMESTIC
164971 175584	C105428-00	WEAVER SAM AND	21N29W15BBC	NO	361		100	100		COMMERCIAL
	C065645-00		21N29W15BC	NO NO	367		160	-	2/9/1995	
156611	C065645-00	CONOCO INC	21N29W14DAA 21N29W15BA	NO NO	380 381	75	45 48	5 20		DOMESTIC
<u>175585</u>		THE LEUFKENS CO	21N29W15BCA	NO	423	180	32	20 75		INDUSTRIAL
154127		GATES GILES	21N29W16AA	NO	424		35	20	*11/9/1995	DOMESTIC

Notes:
Td = Total depth of well in feet below ground

Pwl = Pumping water level in feet below ground

|Swl = Static water level in feet above/below ground - Negative values are reported for water levels that are above land surface.

Yield = Yield in gallons per minute

Date = Completion date of well/borehole

Use = Reported use of water Ver? = Was location verified?

3.1 TEST IMPLEMENTATION

Aquifer testing was conducted by Maxim Technologies (Maxim) and Salish Shores Utility Corporation personnel. Utility personnel coordinated installation and operation of the temporary pumps and discharge piping, recorded manual water level and flow rate measurements, and collected water quality samples. Discharge from both tests was pumped directly into the Clark Fork River (located approximately 400 feet south of each respective well). Maxim personnel setup, installed, and downloaded electronic water level and flow rate instruments. Discharge was measured during the test using a digital paddlewheel sensor connected to an electronic data logger.

3.2 TESTING SEQUENCE, PUMPING RATES, AND DURATION

After conferring with Bill Uthman (personal communication, April 4, 2005) of DNRC it was determined that four pumping tests would be necessary to support a beneficial water use permit application for the Salish Shores PWS. For each pair of wells, a 72-hour constant rate discharge test and recovery test was required, and on the second well of each pair, an 8-hour yield test was required. The aquifer testing sequence, average pumping rates, test dates, and test durations are summarized in Table 2. Plots showing flow rate in each well during the test are presented in Appendix D.

Table 2. Sequence of Aquifer Testing, Flow Rates, and Test Durations

Pumping Well	Average Pumping Rate (gpm)	Pumping Date(s)	Pumping Duration (hours)
Well 3	427	4/20 - 4/23/05	74
Well 4	305¹	4/25/05	8
Well 1	246	4/29 – 5/2/05	72
Well 2	245	5/2/05	8

⁽¹⁾ Flow rate varied considerably during the test due to gravel plugging the pump intake

3.3 WATER LEVEL MONITORING

Water levels were monitored in all four production wells before, during and after each of the four tests. Water levels were also monitored in a fifth well (the "Replacement Well") during all four tests. This well is completed to a total depth of 423 feet bgs and is located 800 feet south of Highway 200 and approximately 3,000 feet from each of the four Salish Shores production wells (Figure 2).

3.4 DATA REDUCTION

Water-level data were downloaded from the data loggers and were compiled in a spreadsheet. Pressure measurements collected with the transducers were converted into relative water level elevations and subsequently into drawdown data.

Barometric pressure in the site vicinity was measured continuously with a pressure transducer throughout the four aquifer tests. These barometric data were plotted along with water level

changes in the pumping and observation wells. No direct correlation between changes in barometric pressure and water level changes was identified. Therefore, it was not necessary to correct drawdown and recovery data for changes in barometric pressure.

4.0 DATA ANALYSIS

Time versus drawdown and recovery data collected during each aquifer test were used to qualitatively and quantitatively evaluate aquifer characteristics. Qualitative interpretations included evaluating whether the aquifer is confined or unconfined and assessing if the presence or absence of aquifer boundary conditions within the area influenced during each test. Quantitative interpretation of the data includes developing estimates of various aquifer properties: transmissivity (T), storativity (S), and hydraulic conductivity (K). Time-drawdown plots for wells monitored during the testing period are included in Appendix B.

4.1 BACKGROUND MONITORING

Water levels were monitored continuously during the period of April 20 to May 2, 2005. With the exception of variability in drawdown during the 72 hour test in Well 1 (discussed in Sections 4.2), water levels observed in Wells 1 through 4 prior to the start of testing and between pumping periods did not vary by more than 0.1 feet during the period monitored. Therefore no trend corrections were applied to drawdown or recovery data prior to analysis.

4.2 AQUIFER TEST RESPONSES

Drawdown responses were detected in observation wells closest to the well being tested during testing of Wells 1, 3, and 4, while no drawdown was observed in any of the other wells monitored. No drawdown was measured in any observation well during the testing of Well 2. Time-drawdown plots for wells monitored during each test are presented in Figures B-1 through B-3 contained in Appendix B. Test responses shown in these plots are summarized as follows:

- Well 1 was pumped for a total of 72 hours at an average flow rate of 246 gpm (Appendix D). A maximum drawdown of 5.20 feet was measured in the pumping well, while a maximum of 0.85 feet of drawdown was observed in Well 2, located 138 feet from the pumping well. Maximum drawdown in both the pumping and observation wells was observed approximately 2,800 minutes (46.5 hours) into the pumping period. Between this time and the shutdown of the test, water levels in Wells 1 and 2 decreased approximately 0.6 feet. This observed trend may be the result of pumping/recovery influence from another well in the area. Following shutdown of the pumping well, the water level Well 1 recovered completely in approximately 7 seconds.
- Well 3 was pumped for a total of 74 hours at an average flow rate of 427 gpm (Appendix D). A maximum drawdown of 36.99 feet was measured in the pumping well, while a maximum of 4.86 feet of drawdown was observed in Well 4, located 59 feet from the pumping well. Ninety percent of the total drawdown measured in the pumping well (Well 3) occurred within the first 17 minutes of pumping. Following the cessation of pumping, the water level in Well 3 recovered to 90 percent of the pre-pumping level in approximately 12 seconds, and reached full recovery (99%) in approximately 20 minutes.

- Well 2 was pumped for a total of 8 hours at an average flow rate of 245 gpm (Appendix D). A maximum of 4.04 feet of drawdown was measured in the pumping well approximately 7 seconds after the pump was started. No drawdown was observed in Well 1, located 138 feet from the pumping well. The water level in Well 2 recovered to near pre-pumping levels almost immediately following shutdown of the well.
- Well 4 was pumped for a total of 8 hours at an average flow rate of 305 gpm. The flow rate varied considerably because gravel was pulled into the pump intake during the test and restricted flow into the pump bowls (Appendix D). This caused the drawdown in the pumping well to also vary during the test (Figure B-3). A maximum drawdown of 72.98 feet was measured in the pumping well, while a maximum of 3.67 feet of drawdown was observed in Well 3, located 59 feet from the pumping well. Similar to Well 3, the water level in Well 4 recovered to near pre-pumping levels almost immediately following shutdown of the well.

4.3 RESULTS

Drawdown and recovery data from the pumping and observation wells were analyzed using standard curve-matching techniques and AquiferWin 32 TM software to calculate estimates of aquifer properties including transmissivity and storativity. This software combines statistical parameter estimation methods with interactive curve-matching capabilities for several aquifer testing solution methods.


The Hantush-Jacob leaky confined aquifer solution (Hantush and Jacob, 1955) provided the best fit to time-drawdown data from the observation wells in tests of Wells 1, 3 and 4. Figure 3 includes log-log plots of the observed response in Well 4 during the test of Well 3 fitted to the Theis (Theis 1935) and Hantush-Jacob type curves. This plot shows that as the pumping period progresses, the observed drawdown values diverge from the Theis curve. The fact that these later-time data fall below the Theis curve suggests that vertical leakage into the pumped aquifer is occurring from an overlying leaky aquitard. This leaky confined response is consistent with the conceptual model of the lithologic system discussed previously (Section 2.0).

Aquifer test curve matches are presented in Appendix B. Aquifer parameters estimated from each of the 72-hour tests are summarized in Table 3. Drawdown responses to each of the four tests were fitted to Hantush-Jacob curves while recovery data were matched to the Theis Recovery solution. Parameter estimates from the aquifer tests are summarized below:

- Well 1: Drawdown observed during the 72-hour test in the pumping well and in the nearest observation well (Well 2) was typical of a leaky confined aquifer (Figure B-1). Transmissivity estimates based on drawdown and recovery data from the observation well were 6,594 to 9,197 ft²/day, respectively. Hydraulic conductivity estimates range from 29 to 41 feet per day. Calculated storativity is 7.0 x 10⁻⁵.
- Well 3: Drawdown curves (Figure B-2) for the pumping well and in the nearest observation well (Well 4) are also typical of a leaky confined aquifer. Transmissivity estimates based on drawdown and recovery data from the observation well were 4,740 to


5,366 ft2/day, respectively. Hydraulic conductivity estimates range from 24 to 27 feet per day. Calculated storativity is $2.7 \times 10-4$.


- Well 2: During the 8-hour test in Well 2, a maximum of 4.04 feet of drawdown was observed in the pumping well. Drawdown was not observed in the nearest observation well (Well 1).
- Well 4: During the 8-hour test in Well 4, drawdown responses were observed in the pumping well (72.98 feet) and in the nearest observation well (Well 3, 3.67 feet). Most of the drawdown in the pumping well appeared to be due to well inefficiency.

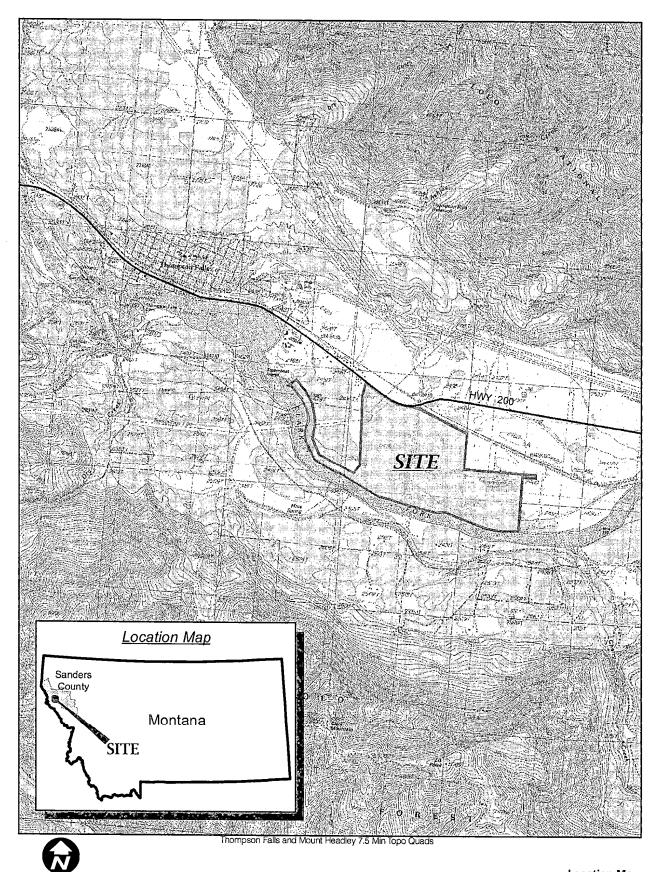





Location Map Salish Shores PWS Thompson Falls, Montana FIGURE 1

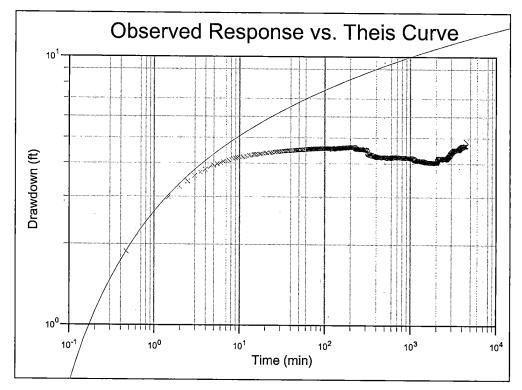

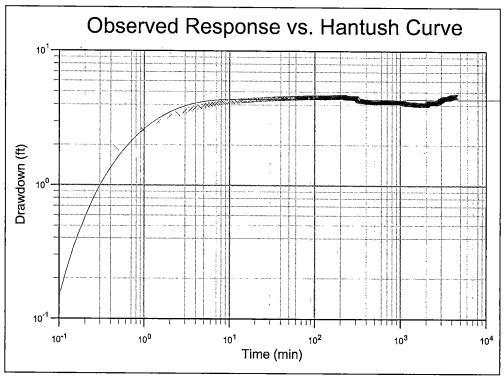

Drawdown in Well 3 During Well 4 Test Match to Theis and Hantush Solutions FIGURE 3

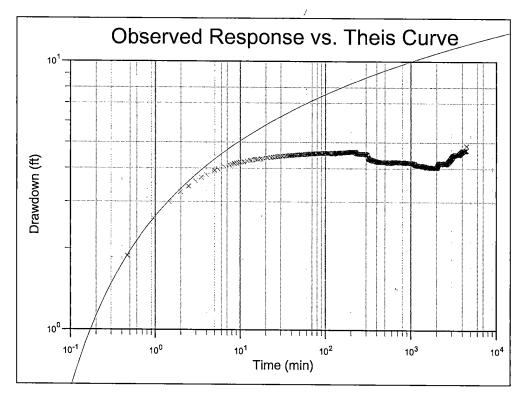

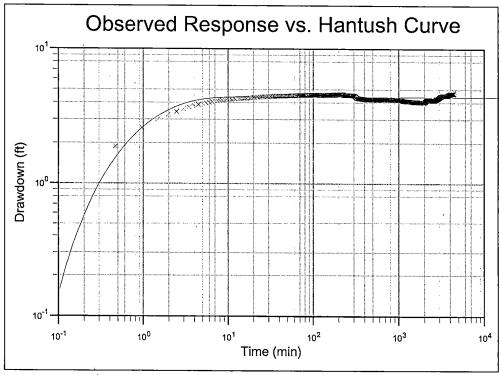

Drawdown in Well 3 During Well 4 Test Match to Theis and Hantush Solutions FIGURE 3

Table 3. Results of Aquifer Test Analysis

Pumping Well and Pumping Parameters	Observation Well	Distance from Pumping Well (ft)	Response Observed Yes(Y) or No(N)	Maximum Drawdown (ft)	Method of Analysis	Transmissivity (ft²/day)	Approximate Aquifer Thickness (ft) 1	Hydraulic Condcutivity (ft/day)	Storage Coefficient
	Well #2	138	Y	0.85	Hantush-Jacob	6,594	226	29	0.00007
Well #1	Well #2	130	1	0.83	Theis Recovery	9,197	. 220	41	NA
Pumping Rate = 246 gpm	Replacement Well	3,300	N						
Maximum Drawdown = 5.20 ft	Well #3	4,074	N		·	·			
Test Duration = 72 hours	Well #4	4,125	N						
	Well #4	59	Y	4.86	Hantush-Jacob	5,366	174	31	0.00027
Well #3	Well #4	39	Y	4.80	Theis Recovery	4,740	174	27	NA
Pumping Rate = 427 gpm	Replacement Well	3,300	N						
Maximum Drawdown = 36.99 ft	Well #2	3,962	N		I				
Test Duration = 74 hours	Well #1	4,074	N	-					
Well #2	Well #1	138	N						
Pumping Rate = 245 gpm	Replacement Well	3,300	N						
Maximum Drawdown = 4.04 ft	Well #3	3,962	N						
Test Duration = 8 hours	Well #4	4,012	N		,				
Well #4	Well #3	59	Y	3.67					
Pumping Rate = 305 gpm	Replacement Well	3,300	N						
Maximum Drawdown = 72.98 ft	Well #2	4,012	N						
Test Duration = 8 hours	Well #1	4,125	N						

^{(1) -} Aquifer thicknes estimates based on drillers log and estimated depth to base of aquifer presented in Herrick (2005)

NA - not available; cannot be calculated from recovery data

5.0 WATER QUALITY MONITORING

Water quality samples were collected during the aquifer tests of Well 3 and Well 4. Samples were analyzed for total iron, manganese, and total arsenic. Three samples were collected from Well 3 during the 74-hour pumping period and one sample was taken from Well 4 near the conclusion of the 8-hour pumping period. Samples were submitted under chain of custody documentation to Montana Environmental Laboratory, LLC in Kalispell, Montana for analysis. Table 4 summarizes analytical laboratory results and includes DEQ's water quality standards.

Table 4. Summary of Water Quality Results - Salish Shores II Wells

Pumping Well	Sample Collection Date & Time	Arsenic Concentration (mg/L) 1	Iron Concentration (mg/L)	Manganese Concentration (mg/L)
	4/20/05 @ 13:30	0.029	14.8	0.81
Well 3	4/21/05 @ 16:50	0.022	0.39	0.38
	4/22/05 @ 17:30	0.020	0.39	0.37
Well 4	4/25/05 @ 1900	0.019	1.30	0.38
WQB-7 Drinking	Water Standard ²	0.050	0.30	0.05

Note:

(1) mg/L – milligrams per liter

(2) WQB-7 - Montana Numeric Water Quality Standards, January 2004

6.0 EXISTING RIGHTS AND PROJECTED WATER NEEDS

Two Provisional Permits cover exiting water usage from the Salish Shores PWS (Table 5). These permits allow for a total of 320 gpm to be pumped from the four Salish Shores PWS wells. If the pumping rates used to test the four wells are summed, the total peak capacity of the system is 1,223 gpm.

Table 5. Summary of Existing Water Rights for Salish Shores PWS

Existing WR #	Туре	Owner	Source	Flow Rate
81519-00	Provisional Permit	Bud Leufkens	Groundwater	110 gpm
85780-00	Provisional Permit	Bud Leufkens	Groundwater	210 gpm
			Total Flow Rate	320 gpm
	1,223 gpm			
	903 gpm			

Figure 2 shows the parcels that the Leufkens Company is seeking to supply with water using the existing Salish Shores PWS wells. Table 6 includes estimated water demands for domestic,

commercial, and lawn and garden uses after full build-out of the Salish Shores area. The Leufkens Company is seeking a water right for irrigation, domestic and commercial supply of 688.7 gpm for a total of 198.1 acre-feet per year.

7.0 GROUNDWATER MODELING

Geomatrix developed a numerical groundwater model of the hydrogeologic system near Thompson Falls using MODFLOW (McDonald and Harbaugh 1989) to support the Beneficial Water Use Permit Application. The following subsections describe the conceptual model and assumptions, model design, and model results.

7.1 CONCEPTUAL MODEL AND ASSUMPTIONS

The first step in the groundwater modeling process is the development of the conceptual model. Assumptions and the conceptual model that the numerical model is based on are summarized below.

- The aquifer hosting the Salish Shores PWS wells is semi-confined, overlain by a leaky confining unit, consists of sand and gravel, and is an average of 225 feet thick with a transmissivity of 6,750 feet.
- The semi-confined aquifer is overlain by approximately 100 to 200 feet of fine-grained material (silt and clay) with a hydraulic conductivity of 0.1 feet per day. This is representative of a sandy silt (Fetter 1988), which is conservative.
- Above these units is an unconfined sand and gravel unit that is approximately 25 feet thick
 with a hydraulic conductivity of 90 feet per day. The upper sand and gravel unit is in
 hydraulic communication with the Clark Fork River.
- Groundwater flow is parallel to the Clark Fork River (northwest).
- The four Salish Shores PWS wells are simulated using MODFLOW's Well Package.
- The Clark Fork River is simulated using MODFLOW's River Package.

Table 6. Projected Water Demand for Buildout of Parcels to be Supplied by Salish Shores PWS

Commercial			Domestic							
Use Type	Airport	Tradewinds 2 Commercial	Salish Shores 1 (14 lots)	Salish Shores 3	Salish Bluffs East	Airport Housing	Salish Shores 4	Totals	Units	Equations and Notes
Commercial Flow Rates									The second secon	
Ave. Annual Daily Demand per Capita, Qr:	100	100							gpcd	
No. of Persons per Home :	0	0					l		persons	
Wastewater Flow (Commercial), Qc:	50	200								
Number of Connections, Nc:	10	40						50	lots	
Population:	0	0							people	
Assume a Population, P, of:	0	0							people	
Total Ave. Annual Daily Demand, Q:	500	8,000						8,500	gpd	= P X Qr or = Nc X Qc
Peaking Factor, PF	4	4	,				ĺ			
Peak Demand	1.4	22.2						23.6	gpm	= Q *PF / 1440
Domestic Flow Rates								i		
Ave. Annual Daily Demand per Capita, Qr.			100	100	100	100	100		gpcd	1
No. of Persons per Home:			2	2	2	2	2		persons	
Wastewater Flow (Commercial), Qc:			0	0	.0	0	0		ľ	
Number of Connections, Nc:			16	28	30	20	80	174	lots	
Population:			32	56	60	40	160	348	pcoplc	
Assume a Population, P, of:		·	32	60	60	40	160	352	people	
Total Ave. Annual Daily Demand, Q:			3,200	6,000	6,000	4,000	16,000	35,200	gpd	= P X Qr or = Nc X Qc
Peaking Factor, PF			4	4	4	4	4		1	
Peak Demand									gpm	= Q *PF / 1440
Lawn and Garden Flow Rates										
Acres to be Irrigated, A:	0	18	8	14	15	10	40	105.3	acres	assumes an average of 0.5 acres of irrigated lawn per lot
Water Application Required, a:	1	1	1	1	1	1	1		inches/week	V V
Length of Irrigation Season, Ti:	17	17	17	17	17	17	17		weeks	
Summer Daily Demand, Qi:	0	70,983	31,031	54,305	58,184	38,789	155,157	408,448	gpd	= (A X 43560 SF/ac X a X 7.48 Gal/CF) / (7 days/week X 1 ft/
Peak Irrigation Demand	0.0	98.6	43.1	75.4	80.8	53.9	215.5	567.3	gpm	= (Qi * 2 / 1440)
Ave. Annual Daily Irrigation Demand, Qid:	0	23,142	10,117	17,705	18,969	12,646	50,585	133,165	gpd	= (Qi X (Ti X 7))/365
Summary of Requested Flow Rates and Volu	mes									
Flow Rate (gpm)			Volume (acre-feet)							
Total Commercial Supply			9.5			Number of Homes			174	
Total Domestic Supply		0.0		39.4 Number Commerc			ts	50		
Total Lawn and Garden		667.3	149		Number Commercial Lots					
Total Amount Requested	_	590.9	198							

Notes

Information supplied by Landworks Consulting and Design, Inc.

gcpd gallons per capita per day gpd gallons per minute

gpm gallons per day

7.2 MODEL DESIGN AND CHECK

Figure 4 shows the model grid and boundary conditions. The three-layer model consists of 72 rows and 63 columns. The grid has a uniform spacing of 300 feet which telescopes down to 75 feet near the four Salish Shores PWS system wells. Layers 1, 2 and 3 represent the shallow unconfined aquifer, the leaky confining unit, and the deep semi-confined aquifer, respectively. The layers were assigned the following MODFLOW layer types:

- Layer 1; Unconfined (Type 1)
- Layer 2; Unconfined (T-varies; Type 3)
- Layer 3; Confined (Type 0)

The upgradient boundaries in all three layers are constant head boundaries. Each layer has a uniform hydraulic conductivity based on the values listed in Section 7.1. Available data are not sufficient to allow a formal calibration of the model. As a check of the model's general ability to simulate the groundwater system, the model was run in transient mode with pumping in Well 3 (427 gpm) for 72 hours. Figure 5 shows the drawdown computed by the model at the location of Well 4. The simulated drawdown of approximately 5.9 feet is slightly higher than the drawdown measured in Well 4 during the 72-hour test (Table 3). The shape of the drawdown curve is similar to that observed during the test (Figure B-2, Appendix B) with the exception of 0.5 feet of drawdown observed between about 250 minutes and 72 hours during the test (discussed further in Section 4.2). Excluding this exception, the model reasonably simulates the response to pumping Well 3.

7.3 Pumping simulation

To assess the potential impact to senior water rights holders, a transient pumping schedule was developed for future full build-out of the Salish Shores area. For this schedule, the average daily demand was assumed to occur over a 12 hour period and assumed to be produced from one well from each well pair at a time. Based on this assumption, the following pumping schedule was developed.


A transient model was developed with 730 12-hour stress periods. Pumping rates for Wells 1 and 3 were input to the MODFLOW model using the values in Table 7. The model was then executed.


Table 7. Transient Pumping Inputs

Time Period	Duration	Well 1 Pump Rate (gpm)	Well 3 Pump Rate (gpm)	Total Pump Rate (gpm)
1 ,	16 weeks	30.3	30.3	60.6
2	17 weeks (irrigation season)	122.8	122.8	245.6
3	16 weeks	30.3	30.3	60.6


Model output indicates that maximum drawdown occurs at the end of the simulated 17 week irrigation season (Time Period 2, Table 7). Figure 6a indicates that maximum drawdown at Well 4 (located within 59 feet of the pumping wells) after the simulated 17-week irrigation season is about 1.6 feet.

Figures 7a and 7b are maps of simulated drawdown at the end of the 17-week irrigation season, and at the end of the 365 day period of diversion, respectively. These figures show that the zone of influence for both periods is about 13,000 feet in diameter and extends to the bedrock contact at the valley margins. Figures 7a and 7b also indicate that the zone of influence of the PWS wells extends beneath the Clark Fork River. The model predicts that at the end of the 365-day period of diversion an additional 22 gpm (0.05 cubic feet per second [cfs]) of Clark Fork River water would recharge the groundwater system compared to non-pumping (steady state) conditions, and at the end of the of the 17-week irrigation season, an additional 72 gpm (0.16 cubic feet per second [cfs]) of water would be drawn from the river.

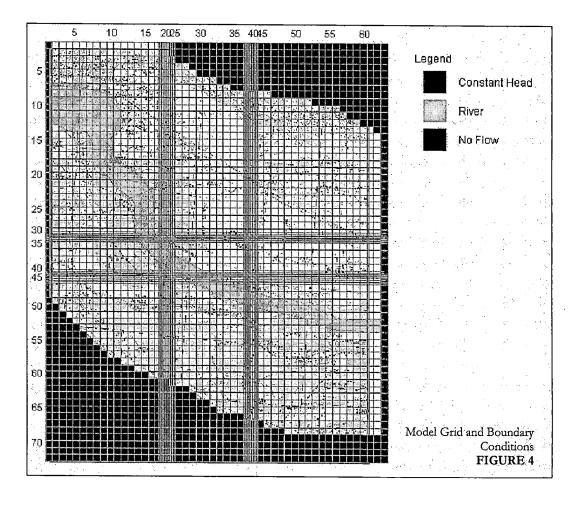


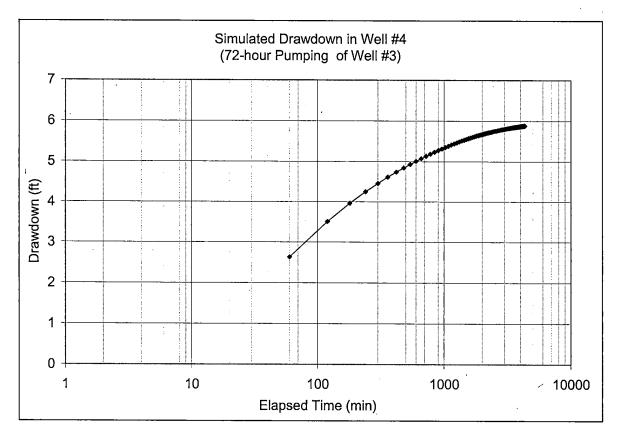

Simulated Drawdown in Well 4 after 72 Hours of Pumping in Well 3 FIGURE 5

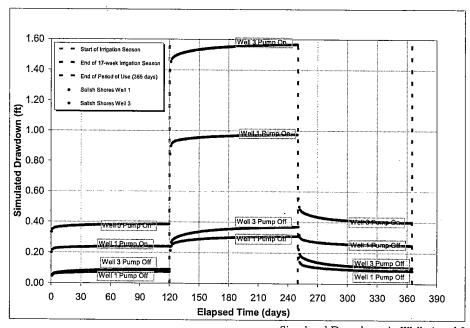



Simulated Drawdown in Wells 1 and 3 Caused by Proposed Pumping in Salish Shores Wells 1 and 3 FIGURE 6a

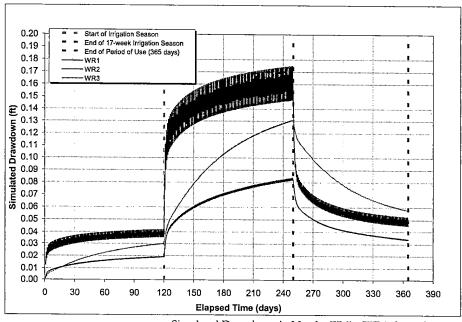

Simulated Drawdown in Nearby Wells (WR1 through WR3) Caused by Proposed Pumping in Salish Shores Wells 1 and 3 FIGURE 6b

NOTES: WR 1, 2 and 3 groundwater rights (locations shown on Figure 7) Pump on/off interval is 12 hours

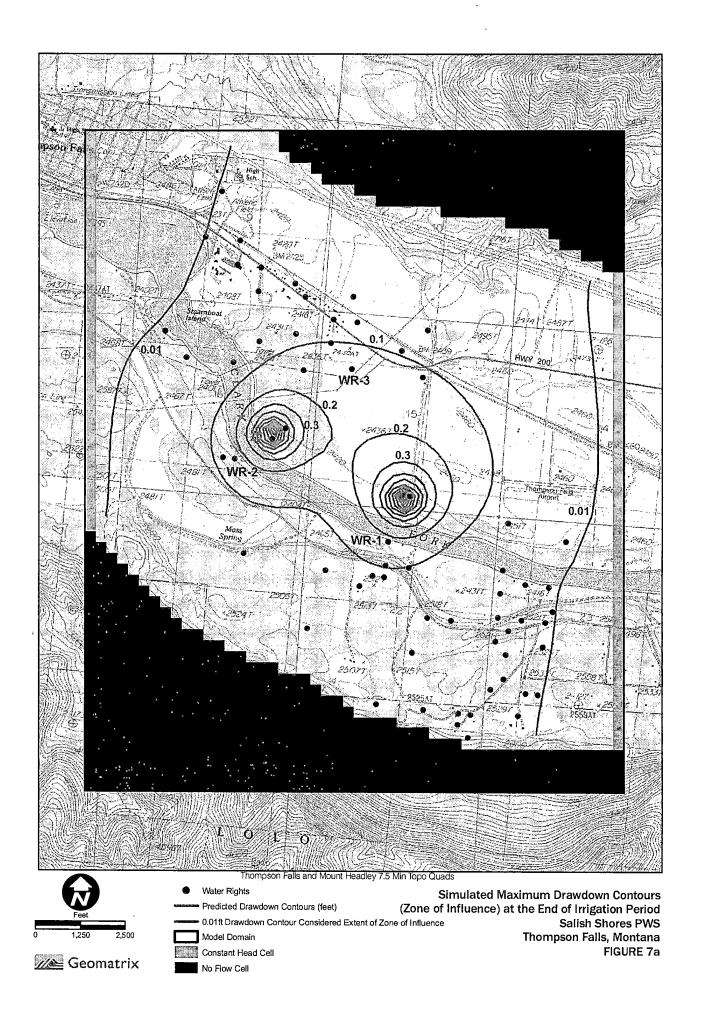

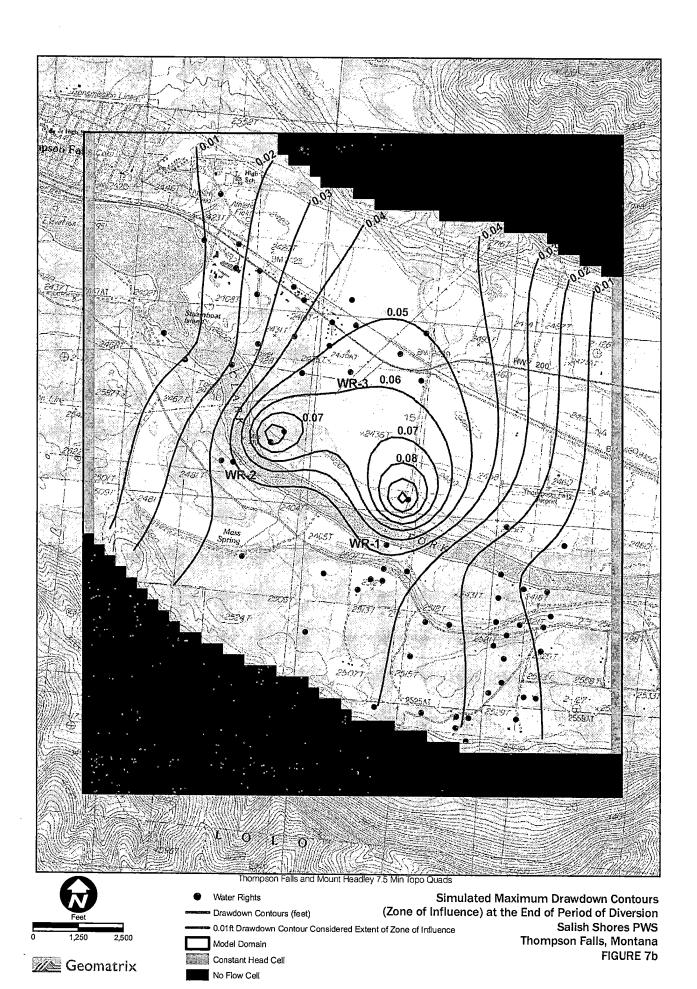

8.0 CALCULATION OF GROUNDWATER FLUX AND LEGAL AVAIALBLITY

One of the DNRC's requirements for an Application for Beneficial Water Use Permit is an estimate of aquifer yield. This is accomplished using Darcy's Law:

Q = K*i*W*b

Where

Q = Discharge

K = hydraulic conductivity i = hydraulic gradient W = aquifer width b = aquifer thickness

Transmissivity (T) is the product of K and the aquifer thickness (b). Because transmissivity was measured during aquifer testing rather than hydraulic conductivity and because well logs for Wells 1 through 4 (Appendix A) illustrate the aquifer thickness is variable, it is appropriate to transform Darcy's Law as follows:

$$Q = T*i*W$$

Groundwater modeling indicates that the zone of influence is about 13,000 feet across. A source water delineation and assessment report for Sanders County Harvest Foods (PWS ID# MT0003709) located approximately one-half mile north of the Salish Shores area was prepared by DEQ's Source Water Protection Program (2002). In this report, the gradient for the confined aquifer in this area was reported to be 0.006 feet/ft. Using a representative T value of 6,750 feet per day (Table 3) we arrive at the following:

Q = T*i*W Q = 6,750 feet²/day *0.006*13,000 feet Q = 526,500 feet³/day Q = 4,412 acre-feet/year

Table 6 indicates that the Leufkens Company is currently seeking a water right for a total of 198 acre-feet/year. Table C-1 includes all groundwater rights identified within the zone of influence of the Salish Shores PWS wells at the end of the 365-day period of diversion (Figure 7b) and indicates that the total annual volume allocated to these wells is 523.75 acre-feet/year. This probability overstates the water allocated from the confined aquifer because well depths indicate that several of these wells may be completed in the shallow aquifer.

The following is a calculation used to determine if groundwater is available:

4,412 acre feet - 198 acre-feet - 524 acre-feet = 3690 acre-feet (volume available) (volume requested) (volume existing rights) (volume available)

A comparison of estimated groundwater flux with existing appropriations indicates that the groundwater requested is legally available.

Table 8 is a list of surface water rights on the Clark Fork River downstream of the Salish Shores PWS. The legal availability of surface water cannot be determined until a final decree on Clark Fork River appropriations has been issued.

8.1 POTENTIAL FOR ADVERSE EFFECTS

Predicted drawdown at wells with existing groundwater rights WR-1 through WR-3 is less than 0.2 feet at the end of the irrigation season (Figure 7a) and less than 0.06 feet at the end of the period of diversion (Figure 7b). While specific pump placement information is not available for each of the wells located within the predicted zone of influence, it is uncommon to have pumps installed in wells such that the intake is only 0.2 ft (2.4 inches) below the pumping water level in the well during low water conditions. Therefore, while the predicted drawdown does represent an impact, it is not likely to be an adverse impact unless there are existing problems with the placement of pumps in these wells. Furthermore, natural seasonal variability in water levels in alluvial aquifer systems in Montana typically exceeds 0.2 feet, and a decrease in water level of less than 0.2 feet due to pumping influence would be indistinguishable from changes due to natural factors.

Groundwater modeling results suggest that there is the potential for an induced increase in leakage from the leaky confining unit above the semi-confined aquifer as a result of PWS well pumping. This leakage could in turn induce an increased rate of seepage from the Clark Fork River into the underlying shallow aquifer near the Salish Shores PWS. The model indicates that at the end of the irrigation season, up to 72 gpm (0.16 cfs) could be captured from the Clark Fork River and that at the end of the period of diversion (365 days) only 0.05 cfs would be captured. It should be noted that the groundwater model has not been formally calibrated or validated and the precision of the model's predictive capabilities have not been quantified.

The 0.05 cfs predicted to be captured from the Clark Fork River by pumping of the Salish Shores PWS wells at the end of the period of diversion is small relative to the flow of the river. The lowest flow rate measured in the last 30 years at the nearest U.S. Geological Survey (USGS) gauging station (Plains, Montana, 30 miles upstream of the site) was 4,930 cfs (9/7/1988). The induced flow rate predicted by the model is 0.001 percent of the 30-year low flow rate for the Clark Fork River at Plains. Because standard stream gauging techniques are only accurate within approximately 10 to 20 percent, the predicted induced change in flow in the Clark Fork River would not be a measurable effect.

Table 8. Clark Fork River Water Rights Downstream of Salish Shores PWS

Water					
Right		Means of	İ		
Number	Water Right Type	Diversion	TR	Section	1/4 Section
11445	PROVISIONAL PERMIT	PUMP	26N32W	33	
131508	PROVISIONAL PERMIT	PUMP	22N30W	3	SWNENW
144656	PROVISIONAL PERMIT	PUMP	21N29W	8	SESWNW
149573	PROVISIONAL PERMIT	DAM	21N29W	7	SENE
16007	PROVISIONAL PERMIT	PUMP	21N29W	8	SWNWSE
166931	STATEMENT OF CLAIM	DAM	21N29W	7	SENE
166933	STATEMENT OF CLAIM	DAM	21N29W	8	NESE
166935	STATEMENT OF CLAIM	PUMP	_21N29W	7	S2NE
167031	PROVISIONAL PERMIT	PUMP	24N31W	7	NWNWNW
177237	STATEMENT OF CLAIM	PUMP	27N34W	21	NWSW
177240	STATEMENT OF CLAIM	PUMP	27N34W	· 21	swsw
207444	STATEMENT OF CLAIM	PUMP	21N29W	16	SENWNW
213058	STATEMENT OF CLAIM	PUMP	24N31W	26	SWNWNW
213929	STATEMENT OF CLAIM	DAM	26N32W	33	S2SW
220399	STATEMENT OF CLAIM	PUMP	22N30W	26	SESWNE
220498	STATEMENT OF CLAIM	PUMP	21N29W	8	SESWNW
220501	STATEMENT OF CLAIM	PUMP	21N29W	8	SWSENW
23915	PROVISIONAL PERMIT	PUMP	22N30W	11	SWSENW
26510	STATEMENT OF CLAIM	PUMP	21N29W	6	SWNWSW
288471	STATEMENT OF CLAIM	DAM	26N32W	33	S2SW
288472	STATEMENT OF CLAIM	DAM	26N32W	33	S2SW
288510	STATEMENT OF CLAIM	DAM	21N29W	7	SENE
288511	STATEMENT OF CLAIM	DAM	21N29W	7	SENE
288512	STATEMENT OF CLAIM	DAM	21N29W	8	NESE
288513	STATEMENT OF CLAIM	DAM	21N29W	8	NESE
288518	STATEMENT OF CLAIM	DAM	26N32W	33	S2SW
290731	STATEMENT OF CLAIM	HEADGATE	27N34W	26	SENWSE
291683	STATEMENT OF CLAIM	PUMP	21N30W	1	NWSENE
31038	STATEMENT OF CLAIM	PUMP	22N30W	26	NWNE
316955	STATEMENT OF CLAIM	DAM	26N32W	33	S2SW
316961	STATEMENT OF CLAIM	DAM	21N29W	7	SENE
317279	STATEMENT OF CLAIM	PUMP	21N29W	9	NWSESW
317332	STATEMENT OF CLAIM	PUMP	21N29W	8	SESWNW
325024	PROVISIONAL PERMIT	PUMP	22N30W	14	SENESE
325212	PROVISIONAL PERMIT	PUMP	24N31W	26	NWNWNW
325746	PROVISIONAL PERMIT	PUMP	22N30W	11	NWSENW
34219	STATEMENT OF CLAIM	PUMP	27N34W	20	NWSESE
35803	STATEMENT OF CLAIM	PUMP	22N30W	35	SENWNE
51322	STATEMENT OF CLAIM	PUMP	22N30W	26	NWSWNE
53466	STATEMENT OF CLAIM	PUMP	27N34W	35	SWSENE
58004	PROVISIONAL PERMIT	PUMP	26N33W	5	NWNWNW
62924	STATEMENT OF CLAIM	PUMP	21N29W	9	NWSESW
65787	PROVISIONAL PERMIT	PUMP	26N33W	13	NWSESE
67287	PROVISIONAL PERMIT	PUMP	22N30W	23	SWSESE
70041	PROVISIONAL PERMIT	PUMP	21N29W	8	SWSWNW
70286	PROVISIONAL PERMIT	PUMP	21N29W	8	SWSWNW
81389	PROVISIONAL PERMIT	PUMP.	24N31W	26	SWNENE
83374	STATEMENT OF CLAIM	PUMP	27N34W	19	NWSENE
83376	STATEMENT OF CLAIM	PUMP	27N34W	19	W2NWNE
84288	PROVISIONAL PERMIT	PUMP	22N30W	3	SESENW
84777	PROVISIONAL PERMIT	PUMP	25N32W	10	SWSENE
86340	PROVISIONAL PERMIT	PUMP	21N29W	6	NWSWSW

9.0 REFERENCES

- Cooper, H.H. and C.E. Jacob. (1946). A generalized graphical method for evaluating formation constants and summarizing well field history. *Transactions, American Geophysical Union, Vol. 27, No. 4, pp.* 526-534.
- Environmental Simulations Inc. (1996). Guide to Using Groundwater Vistas Advanced Model Design and Analysis. Herndon, Virginia.
- Fetter, C. W., 1988, Applied Hydrogeology, Second Edition, Charles E. Merrill and Co., Columbus, Ohio, 592 p.
- Hantush, M.S. and C.E. Jacob. (1955). Non-steady radial flow in an infinite leaky aquifer. Transactions, American Geophysical Union, Vol. 36, No. 1, pp. 95-100.
- McDonald and Harbaugh. 1989. A Modular Three-Dimensional Finite-Difference Ground-Water Flow Model (MODFLOW), Techniques of Water-Resources Investigations of the United States Geological Survey (USGS). Book 6, Chapter A-1. U.S. Government Printing Office, Washington D.C.
- Rumbaugh, D. and J. Rumbaugh. Aquifer Win32 (Version 3.11) [Computer software]. Environmental Simulations, Inc, 2005.
- Source Water Protection Program, Montana Department of Environmental Quality, 2002. Source Water Delineation and Assessment Report, Sanders County Harvest Foods, Public Water Supply, PWS ID #MT0003709. October 21.

WELL LOG REPORT

FIR.		
	All markets	

State law requires that the Bureau's copy be filed by the water well driller within 60 days after completion of the well.

1. WELLOWNER Name Dub + Tub. LE LE K.'N	f) Duration of test: Pt.mping time
2. CURRENT MAILING ADDRESS BOX 1030 THO MEDN SALCS MT59873	n) Hecovery water level
3. WELL LOCATION	tended appropriation, in addition to the above information, water level data shall be collected and recorded on the Department's "Aguiter Test Data"
Township 2/ N/R Range 29 RW County SqueDate Gown't Lot, or Lot, Block	form. NOTE: All wells shall be equiciped with an access port ½ inch minimum or a pressure gauge that will indicate the shut-in pressure of a flowing well. Removable caps are acceptable as access ports.
Tract Number	11. WAS WELL PLUGGED OR ABANDONED?Yes
4. PROPOSED USE: Domestic: Stock ☐ Irrigation ☐ Other ☐ specify	A 1981 A A
5. TYPE OF WORK:	Depth (it.) From To Formation
New well X Method: Dug 🖸 Bored 🖸 Deepened U Cable 🗇 Driven 🗇	0 25 BOWDERS DAKE
Reconditioned 3 Rotary & Jetted 3	25 114 YELLOW CLAY
6. DIMENSIONS: Diameter of Hole	114 121 Blue Clay GRAVEL
Dia	/ /
Diain, fromft. toft.	WATER
7. CONSTRUCTION DETAILS: Casing; Steel Dia 6 from 2 11. to 721.1t.	
Casing; Steel Dia from 2 11. to 721. ft. Threaded D Welded & Dia from 11. to 15.	
Type Wall Thickness 250	
Casing; Plastic Diafromft. toft. Weightft. toft.	
I PERENDATIONS VOS CO NA CO	
Type of perforator usedin. byin.	
Size of perforationsin. byin.	
perforations fromft. toft. toft. toft.	
perforations from	
SCREENS: Yes O No.63	
Manufacturer's Name	
Type	
CRAVEL BACKEDS Vos IT NA EL Civa of armot	
Gravel placed from	
GROUTED: IO What depth?	
Material used in grouting Bearing	
8. WELL HEAD COMPLETION: Pitiess Adapter 17 Yes 25-No	
9. PUMP (if installed)	
Manufacturer's name Type Model No. HR.	ATTACH ADDITIONAL SHEETS IF NECESSARY
	13. DATE COMPLETED 4-8-92
10. WELL TEST DATA The information requested in this section is required for all wells. All depth measurements shall be from the top of the well easing. All wells under 100 gpm must be tested for a minimum of one hour and provide the following information:	14. DRILLER/CONTRACTOR'S CERTIFICATION This well was drilled under my jurisdiction and this report is trace the best of my knowledge. 4-72-64
a) Air Pump Bailer b) Static water level immediately before testing psi. It. If flow ing; closed in pressure psi. gpm. Flow controlled by valve, incher, (specify)	HANT WELL DIRELLING + SERVE INF FIRMHAMA 168 MULLAN RO. WENT SANCESON
c) Depth at which pump is set for test	Address Signature Signature Signature
MONTANA DEPARTMENT OF NATURAL RESOUR	

DEPARTMENT COPY

DRILLER: Please give this copy to the well owner to complete reverse side.

OWNER Complete reverse side and send to DNRC when the well is completed, and the water has been used beneficially for the intended purpose.

Montana Bureau of Mines and Geology **Ground-Water Information Center Site Report LEUFKIN BUD & JUDY**

Plot this site on a topographic map

Location Information

GWIC Id: 135335

Location (TRS): 21N 29W 16 DAC

County (MT): SANDERS

DNRC Water Right: 081519

PWS Id: Block:

Lot:

Addition:

Source of Data: LOG

Latitude (dd): 47.5747

Longitude (dd): -115.3138

Geomethod: TRS-TWN

Datum: NAD27

Altitude (feet):

Certificate of Survey:

Type of Site: WELL

Well Construction and Performance Data

Total Depth (ft): 121.00

Static Water Level (ft): 22.00

Pumping Water Level (ft): 30.00

Yield (gpm): 50.00

Test Type: AIR

Test Duration: 3.00

Drill Stem Setting (ft):

Recovery Water Level (ft):

Recovery Time (hrs):

Well Notes:

How Drilled: ROTARY Driller's Name: KANE

Driller License: WWD034

Completion Date (m/d/y): 4/8/1992

Special Conditions:

Is Well Flowing?:

Shut-In Pressure:

Geology/Aquifer: Not Reported

Well/Water Use: Not Reported

Hole Diameter Information

No Hole Diameter Records currently in GWIC.

Annular Seal Information

From To Description

0.0 20.0 BENTONITE

Casing Information¹

Wall **Pressure** From To Dia Thickness Rating Joint Type 2.0 121.0 6.0 STEEL

Completion Information¹

No Completion Records currently in GWIC.

Lithology Information

From	To	Description
		BOULDERS;DARK SAND
25.0	114.0	YELLOW CLAY
114.0	121.0	BLUE CLAY;GRAVEL;WATER



¹ - All diameters reported are **inside** diameter of the casing.

These data represent the contents of the GWIC databases at the Montana Bureau of Mines and Geology at the time and date of the retrieval. The information is considered unpublished and is subject to correction and review on a daily basis. The Bureau warrants the accurate transmission of the data to the original end user. Retransmission of the data to other users is discouraged and the Bureau claims no responsibility if the material is retransmitted. Note: non-reported casing, completion, and lithologic records may exist in paper files at GWIC.

Fc.m	No.	603	(R	2-89)

WL__LOG REPORT

File	N۵.	· / !!

State law requires that the Bureau's copy be filed by the water well driller within 60 days after completion of the well.

1. WELLOWNER Name Sign Law Francis 2. CURRENT MAILING ADDRESS BOX 1030 THE MISSON FALLS, MIT 5887 3. WELL LOCATION Sub 1/4 NO 1/4 Section 1/6 Township 2 / N/F Range 27 TW County SAND & Govn't Lot, or Lot, Block Subdivision Name	f) Duration of test: Pumping time hrs. g) Recovery time hrs. hrs. hrs. hrs. hrs. hrs. hrs. hrs.
5. TYPE OF WORK: New well	1 20 Box CBOKS, GRAVE
6. DIMENSIONS: Diameter of Hole Dia	20 22 (CAY CY) (SG) 22 35 WATER GRAVEL
7. CONSTRUCTION DETAILS: Casing; Steel Dia	35 121 BROWN CLAY 121 141 GRUEL, MATER
Casing; Plastic Dia from ft. to ft. Weight Dla from ft. to ft. PERFORATIONS: Yes D No 🔁, Type of perforator used In. by In. perforations from ft. to ft. perforations from ft. to ft.	
perforations from	
GRAVEL PACKED: Yes No.R. Size of gravel Gravel placed from	
8. WELL HEAD COMPLETION: Pitless Adapter 디 Yes 중위이	
9. PUMP (if installed) Manufacturer's name TypeModel NoHP	ATTACH ADDITIONAL SHEETS IF NECESSARY 13. DATE COMPLETED 7 - 1 - 9 - 2
The information requested in this section is required for all wells. All depth measurements shall be from the top of the well casing. All wells under 100 gpm must be tested for a minimum of one hour and provide the following information: a) Air Pump Bailer b) Static water level immediately before testing ing; closed-in pressure psi. Flow controlled by: valve, reducers, opm other, (specify) C) Depth at which pump is set for test gpm. e) Pumping rate: gpm. e) Pumping water level gpm. e) Pumping water level first gpm. e) Pumping began.	14. DRILLER/CONTRACTOR'S CERTIFICATION This well was drilled under my jurisdiction and this report is true to the best of my knowledge. 7-14-5-2 Date Purple Firm Name 168 Mullaus Roun-Supersion, and Address

Montana Bureau of Mines and Geology Ground-Water Information Center Site Report LEUFKENS BUD

Plot this site on a topographic map

Location Information

GWIC Id: 131977

Location (TRS): 21N 29W 16 DAC

County (MT): SANDERS

DNRC Water Right:

PWS Id:

Block: Lot:

Addition:

Source of Data: LOG

Latitude (dd): 47.5747

Longitude (dd): -115.3138

Geomethod: TRS-TWN

Datum: NAD27

Altitude (feet):

Certificate of Survey:

Type of Site: WELL

Well Construction and Performance Data

Total Depth (ft): 141.00

Static Water Level (ft): 21.00

Pumping Water Level (ft): 60.00

Yield (gpm): 100.00

Test Type: AIR

Test Duration: 2.00

Drill Stem Setting (ft):

Recovery Water Level (ft):

Recovery Time (hrs):

Well Notes:

How Drilled: ROTARY

Driller's Name: KANE

Driller License: WWD023

Completion Date (m/d/y): 7/14/1992

Special Conditions:

Is Well Flowing?:

Shut-In Pressure:

Geology/Aquifer: Not Reported

Well/Water Use: TEST WELL

Hole Diameter Information

No Hole Diameter Records currently in GWIC.

Annular Seal Information

From	To	Description
0.0	18.0	BENTONITE

Casing Information¹

From	То	Dia	Wall Thickness	Pressure Rating	Туре
2.0	141.0	6.0			STEEL

Completion Information¹

No Completion Records currently in GWIC.

Lithology Information

From To		Description
0.0	1.0	SOIL
1.0		BOULDERS- GRAVEL
		CLAY(YELLOW)
22.0	35.0	WATER- GRAVEL
		BROWN CLAY
121.0	141.0	GRAVEL- WATER



 $^{^{\}mathrm{1}}$ - All diameters reported are **inside** diameter of the casing.

These data represent the contents of the GWIC databases at the Montana Bureau of Mines and Geology at the time and date of the retrieval. The information is considered unpublished and is subject to correction and review on a daily basis. The Bureau warrants the accurate transmission of the data to the original end user. Retransmission of the data to other users is discouraged and the Bureau claims no responsibility if the material is retransmitted. Note: non-reported casing, completion, and lithologic records may exist in paper files at GWIC.

State law requires that the Bureau's copy be filled by the water well driller within 60 days after completion of the well.

1. WELLOWNER Name QuD Lex F Kin	n Du g) Re	ration of test covery time_	: Pumping time hrs hrs
URRENT MAILING ADDRESS	pu	mping atopp	ed.
Thomason Falls MT 5913	hours	is intended to or more. The cred continu	o yield 100 gpm or more shall be tested for a period of 8 test shall follow the development of the well, and shall be ously at a constant discharge at least as great as the in-
3. WELL LOCATION	tended shall t	i appropriations collected	on. In addition to the above information, water level data and recorded on the Department's "Aquifer Test Data"
SW 4 SW 14 SE 14 Section /5 Township 2/ Nil Range 2/ AW County Japanese	u pioc	sure gauge th	hall be equipped with an access port ½ inch minimum or lat will indicate the shut in pressure of a flowing well. Re-
Gown't Lot grLot Block Subdivision Name Sulfak Skezes	<u></u>	 	ED OR ABANDONED? Yes No
Tract Number	if yes, i	how?	
Other specify Su. O. S. U. Saul (Sacist S. Horras)	12. WELL! Depi	LOG th (ft.) To	-
S. TYPE OF WORK: New weil B. Method: Dug Bored	From	10 28	Formation BOULDEKI BRAUEL
Deepened 🖸 Cable 🗘 Driven 🗅		-0	
Reconditioned D Rotary 18, Jetted D	28	23B	BLUE CLAY, SI'NE DAKE
6. DIMENSIONS: Diameter of Hole	 	 	sand !!
Dia 8 in from C ft. to 20 ft. Dia In from ft. to ft.	300		
Olain. fromft. toft. Dlain. fromft. toft.	228	240	YOKOW CLAY, GRAJEL
			WATER
7. CONSTRUCTION DETAILS: Casing; Steel Dia 6 15 from 2 ft. to 240 ft.	 	 	
Threaded District Welded District Distr		 	
TypeWall Thickness . Z_CO			
Casing: Plastic Dia fromft. toft.			
Weight Dia from ft. to ft.			
PERFORATIONS: Yes D No.E			
Size of periorations in, by In.		 	
perforations from	-	 	
perforations from fi. to fi.			
CREEKS: Yea D Norsk. Manufacturer's Name			
Type Model No			
Dia. Slot size from ft. to ft.			
DiaSlot sizefromft. toft.	<u> </u>		
GRAVEL PACKED: Yes No.27 Size of gravet			
GROUTED: To what depth? CO ft.			
Material used in grouting Bourowite	 	 	
8. WELL HEAD COMPLETION:	 	 	
Pilless Adapter D Yes DNo			
9. PUMP (if installed)			
Manufacturer's name		نبنا	
Type Model No HP			ATTACH ADDITIONAL SHEETS IF NECESSARY
10. WELL TEST DATA		OMPLETED	
The information requested in this section is required for all wells. All depth measurements shall be from the top of the well casing. All wells under 100 gpm must be tested for a minimum of one hour and provide the following information:	This we		COR'S CERTIFICATION I under my jurisdiction and this report is true to the best of
a) Air Pump b) Static water level immediately before teating 7.5 ft. if flow- ing; closed in pressure pet. Flow continuist for water pet.	SEA.	we L	Dete Descript to Sex Bite
other, (specify) c) Depth at which pump is set for test 20 d) The pumping rate: 50 gpm.	168	Auce	AL ROLD Superior MA
e) Pumping water level 20 it. at 3 hre, after pumping began.	810 met	1	Kana was 34 Works
185 Well			
MONTANA DEPARTMENT OF NATURAL RESOURCE	ES & C	ONSER	MATION DNRC

.

DEPARTMENT COPY

DRILLER: Please give this copy to the well owner to complete reverse side.

OWNER: Complete reverse side and send to DNRC when the well is completed and the water has been used beneficially for the intended purpose.

Montana Bureau of Mines and Geology Ground-Water Information Center Site Report LE SKIN BUD

Plot this site on a topographic map

Location Information

GWIC Id: 139319

Location (TRS): 21N 29W 15 DCC

County (MT): SANDERS

DNRC Water Right:

PWS Id: Block:

Lot:

Addition: SALISH SHORES

Source of Data: LOG

Latitude (dd): 47.5710

Longitude (dd): -115.2977

Geomethod: TRS-TWN

Datum: NAD27

Altitude (feet):

Certificate of Survey:

Type of Site: WELL

Well Construction and Performance Data

Total Depth (ft): 240.00

Static Water Level (ft): 35.00

Pumping Water Level (ft): 60.00

Yield (gpm): 250.00

Test Type: AIR

Test Duration: 3.00

Drill Stem Setting (ft):

Recovery Water Level (ft):

Recovery Time (hrs):

Well Notes:

How Drilled: ROTARY

Driller's Name: KANE

Driller License: WWD034

Completion Date (m/d/y): 6/10/1993

Special Conditions:

Is Well Flowing?:

Shut-In Pressure:

Geology/Aquifer: Not Reported

Well/Water Use: DOMESTIC

TEST WELL

Hole Diameter Information

No Hole Diameter Records currently in GWIC.

Annular Seal Information

From	То	Description
0.0	20.0	BENTONITE

Casing Information¹

From	То	Dia	Wall Thickness	Pressure Rating	Туре
2.0	240.0	6.0			STEEL

Completion Information¹

No Completion Records currently in GWIC.

Lithology Information

From	То	Description
0.0	28.0	BOULDERS GRAVEL
28.0	228.0	BLUE CLAY FINE DARK SAND
228.0	240.0	YELLOW CLAY GRAVEL WATER

212

These data represent the contents of the GWIC databases at the Montana Bureau of Mines and Geology at the time and date of the retrieval. The information is considered unpublished and is subject to correction and review on a daily basis. The Bureau warrants the accurate transmission of the data to the original end user. Retransmission of the data to other users is discouraged and the Bureau claims no responsibility if the material is retransmitted. Note: non-reported casing, completion, and lithologic records may exist in paper files at GWIC.

¹ - All diameters reported are **inside** diameter of the casing.

. LOG REPORT

State law requires that the Bureau's copy be filed by the water well driller within 60 days after completion of the well.

	Neme But La Skin	n) Du g) Re h) Re	ration of test covery time.	: Pumping time hrs. hrs. level ft. at hrs. after		
' 2 	CURRENT MAILING ADDRESS LO. Bot 1030 Thomason Fulls, UT 59813	Wol	Wells intended to yield 100 gpm or more shall be tested for a period of 8 hours or more. The test shall follow the development of the well, and shall be			
3	WELL LOCATION SWY SW Y SE Y Section 15	conducted continuously at a constant discharge at least as great as the in- tended appropriation. In addition to the above information, water level data shall be collected and recorded on the Department's "Aquifer Test Data" form.				
	Township 2/ N8 Range 29 FW County SANDER Govn't Lot or Lot Block Subdivision Name Salish Stores	NOT a pres	Bure cauce tr	hall be equipped with an access port ½ inch minimum or lat will indicate the shut-in pressure of a flowing well. Re- cceptable as access ports.		
L	Tract Number	11. WAS WELL PLUGGED OR ABANDONED? Yes K No				
4	PROPOSED USE: Domestic EX Stock () Irrigation () Other Paperity Stock () (Society Stocks)	12. WELL LOG				
Š.	TYPE OF WORK:	From	th (ft.) To	Formation		
	New well S. Method: Dug D Bored D	0	26	Boulders, GRAVEL		
L	Despened	24	224	Blue Clay Pare Dece		
Q.	DIMENSIONS: Diameter of Hole Dia	22/	246	GRAUGE WALLOW CON		
	Dia			The state of the s		
	Diain, fromft. toft.			WATER		
7.	CONSTRUCTION DETAILS:					
	Casing; Steel Dia 6 from 2 ft. to 346 ft. Threaded Dia from ft. to ft.					
	Type Wall Thickness (250)					
	Casing; Plastic Diaft. toft.					
	Weight Dia from ft. to ft.					
	PERFORATIONS: Yes D No R Type of perforator used					
	Size of perforationsin. byin.					
	perforations fromft. toft.					
	perforations fromft. toft.					
•	SCREENS: Yes CI NO.EY					
	Manufacturer's Name					
	Type Model bit: ft Dia Slot size from ft./fc ft.					
	Dia. Slot size from ft. to ft.					
!	GRAVEL PACKED: Yes [] No Et- Size of gravel					
	Gravel placed fromft. toft.					
	GROUTED: To what depth?ft.					
	Material used in grouting BENTALITE					
	WELL HEAD COMPLETION: Pilless Adapter D Yes XL No					
	PUMP (If installed)					
	Manufacturer's name Model No. HP.			ATTACH ADDITIONAL SHEETS IF NECESSARY		
_		13. DATE CO	MPLETED_	6-13-93		
	The information requested in this section is required for all wells. All depth measurements shall be from the top of the well casing. All wells under 100 gpm must be tested for a minimum of one hour and pro-	DRILLER/CONTRACTOR'S CERTIFICATION This well was drilled under my jurisdiction and this report is true to the best of my knowledge.				
	rice the following information:	ウーノヤ		2-13-53		
	Air Pump Bailer Static water level immediately before testing 3 ft. if flowing; closed in pressure pai. gpm. Flow controlled by: yelve. reducers.	Firm Name woll Delline + Society Firm Name Address Addr				
9	other, (specify) Depth at which pump is set for jest					
è	Pumping water level Office at his, after pumping began.	Signature	ray N	(579 72 Ucarda No.		
М	ONTANA DEPARTMENT OF NATURAL RESOURCE	ES & CO	NSERVA	ATION DAIDC		
16	1620 EAST SIXTH AVENUE HELENA, MONTANA 59620-2301 444-6610					

Montana Bureau of Mines and Geology Ground-Water Information Center Site Report LE SKIN BUD

Plot this site on a topographic map

Location Information

GWIC Id: 139318

Location (TRS): 21N 29W 15 DCC

County (MT): SANDERS

DNRC Water Right:

PWS Id: Block:

Lot:

Addition: SALISH SHORES

Source of Data: LOG

Latitude (dd): 47.5710

Longitude (dd): -115.2977 Geomethod: TRS-TWN

Datum: NAD27

Altitude (feet):

Certificate of Survey:

Type of Site: WELL

Well Construction and Performance Data

Total Depth (ft): 246.00

Static Water Level (ft): 33.00

Pumping Water Level (ft): 40.00

Yield (gpm): 50.00 Test Type: AIR

Test Duration: 2.00

Drill Stem Setting (ft):

Recovery Water Level (ft):

Recovery Time (hrs):

Well Notes:

How Drilled: ROTARY

Driller's Name: KANE

Driller License: WWD034

Completion Date (m/d/y): 6/13/1993

Special Conditions:

Is Well Flowing?:

Shut-In Pressure:

Geology/Aquifer: Not Reported

Well/Water Use: DOMESTIC

TEST WELL

Hole Diameter Information

No Hole Diameter Records currently in GWIC.

Annular Seal Information

From	То	Description
0.0	20.0	BENTONITE

Casing Information¹

Casing Information						
From	То	Dia	Wall Thickness	Pressure Rating		Туре
2.0	246.0	6.0				STEEL

Completion Information¹

No Completion Records currently in GWIC.

Lithology Information

From	То	Description		
0.0	26.0	BOULDERS GRAVEL		
26.0	224.0	BLUE CLAY FINE DARK SAND		
224.0	246.0	GRAVEL YELLOW CLAY WATER		

220'


These data represent the contents of the GWIC databases at the Montana Bureau of Mines and Geology at the time and date of the retrieval. The information is considered unpublished and is subject to correction and review on a daily basis. The Bureau warrants the accurate transmission of the data to the original end user. Retransmission of the data to other users is discouraged and the Bureau claims no responsibility if the material is retransmitted. Note: non-reported casing, completion, and lithologic records may exist in paper files at GWIC.


¹ - All diameters reported are **inside** diameter of the casing.


1.	WELLOWNER NameTHE LEUFKEN'S CO	f) Duration of test: Pumping time <u>2c</u> hrs. (1645) g) Recovery time <u>7</u> hrs. h) Recovery water level 32 ft. at <u>1/2</u> hrs. after				
2.	CURRENT MAILING ADDRESS FROM 1030 THOMPSON FALLS 117 59873	pumping stopped. Wells intended to yield 100 gpm or more shall be tested for a period of 8 hours or more. The test shall follow the development of the well, and shall be conducted continuously at a constant discharge at least as great as the intended environment of the above information, water level data				
3.	WELL LOCATION SW 1/4 A I I I/4 Section 15 Township 31 N/S Range 29 E(W) County SAA/INETES Govn't Lot , or Lot , Block	shall be collected and recorded on the Department's "Aquifer Test Data" form. NOTE: All wells shall be equipped with an access port ½ inch minimum or a pressure gauge that will indicate the shut-in pressure of a flowing well. Removable caps are acceptable as access ports.				
	Subdivision Name Tract Number	11. WAS WELL PLUGGED OR ABANDONED?YesX No If yes, how?				
4.	PROPOSED USE: Domestic ☐ Stock ☐ Irrigation ☐ Other ☐ specify Industrial development	12. WELL LOG Depth (ft.) From To Formation				
5.	TYPE OF WORK: New well Deepened □ Cable □ Driven □	From To Formation 0 20 sand -gravel 20 40 coarse gravel				
	Deepened □ Cable □ Driven □ Reconditioned □ Rotary □ Lx Jetted □	40 50 sand-fine, silty, brown 50 70 clay - brown				
6.	DIMENSIONS: Diameter of Hole Dia	70 90 sand- fine, silty, brown				
,	Dia.	125 1/5 cand- fine silty, brown				
7.	CONSTRUCTION DETAILS: Casing; Steel Dia. 6 5 / Bom +2 ft. to 423 ft.	155 265 sand- fine, silty, tan				
	Threaded □ Welded ☒ Dia.² from ft. to ft. TypeA – 53 Wall Thickness 250	285 405 sand- fine, silty, tan 405 415 clay- med soft, tan				
	Casing; Plastic Dia. from ft. to ft. Weight Dia. from ft. to ft.	415 423 silt sand , gravel				
	PERFORATIONS: Yes \(\text{No } \text{ No } \text{ \text{X}} \) Type of perforator used					
	Size of perforationsin. byin					
	perforations fromft. toftftft.					
	SCREENS: Yes \(\text{No } \text{Tx} \) Manufacturer's Name	-				
	Manufacturer's Name					
	Dia. Slot size from ft. to ft. GRAVEL PACKED: Yes □ No ☒ Size of gravel					
	Gravel placed from ft. to ft. GROUTED: To what depth? 5 t ft.					
	Material used in grouting #8 Bentonite pellets					
] 8	B. WELL HEAD COMPLETION: Pitless Adapter 英Yes □ No					
1	PUMP (if installed) Manufacturer's name	ATTACH ADDITIONAL SHEETS IF NECESSARY				
	Type SUB Model No. HP. 77/2	13. DATE COMPLETED 8-18-1998				
11	 WELL TEST DATA The information requested in this section is required for all wells. All depth measurements shall be from the top of the well casing. All wells under 100 gpm must be tested for a minimum of one hour and pro- 	my knowledge.				
f i	vide the following information: a) Air 75 Pump 20 Bailer b) Static water level immediately before testing 32 ft. If flow	To-15-98 Date KRASS DRILLING & PUMP SVC. INC.				
	ing; closed-in pressurepsipsigpm	Firm Name				


APPENDIX B

TIME—DRAWDOWN PLOTS

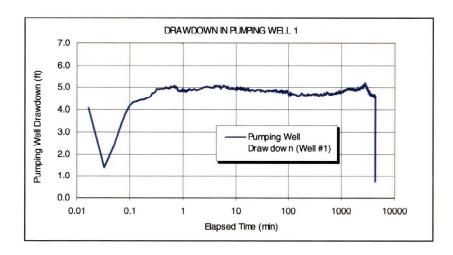

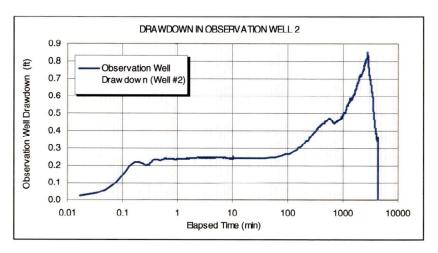

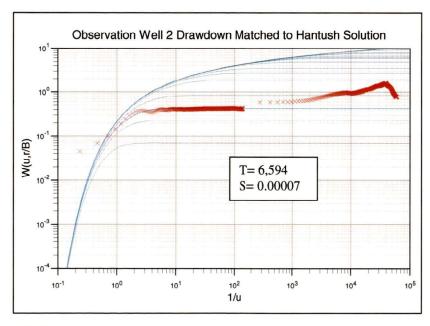


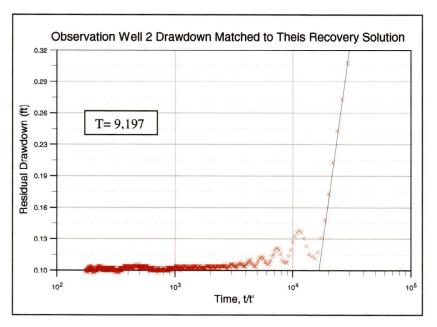



NOTES:


- Well 1 was pumped at an average flow rate of 246 gpm for 72 hours
- Drawdown measured in Well 2 (located 138 feet away) is presented above
- No Drawdown was observed in Wells 3 and 4 (located 4,074 and 4,125 feet away, respectively)

Drawdown Response and Curve Matching Solutions
72-hour Aquifer Test of Well 1
Salish Shores PWS
Thompson Falls, Montana
Appendix B-1

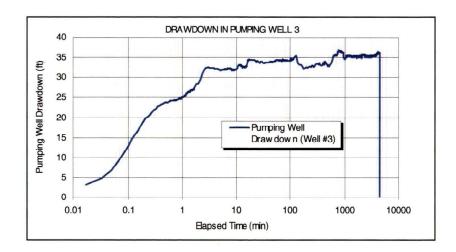

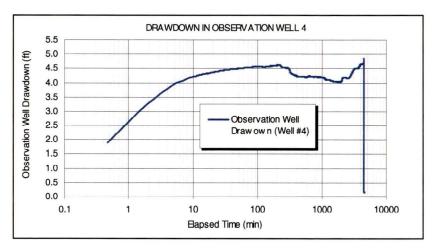

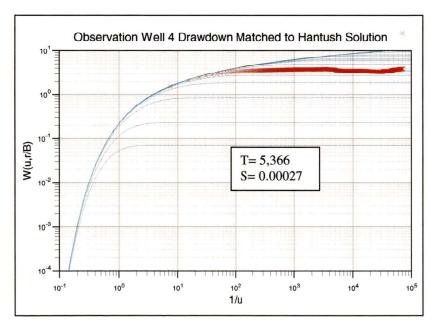


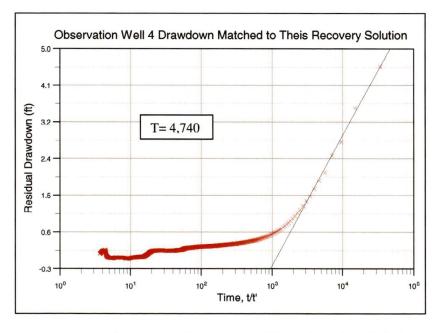



NOTES:


- Well 3 was pumped at an average flow rate of 427 gpm for 74 hours
- Drawdown measured in Well 4 (located 59 feet away) is presented above
- No Drawdown was observed in Wells 1 and 2 (located 4,074 and 3,962 feet away, respectively)

Drawdown Response and Curve Matching Solutions
72-hour Aquifer Test of Well 3
Salish Shores PWS
Thompson Falls, Montana
Appendix B-2

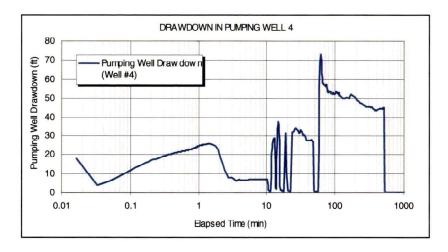

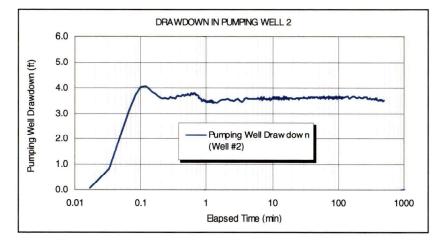

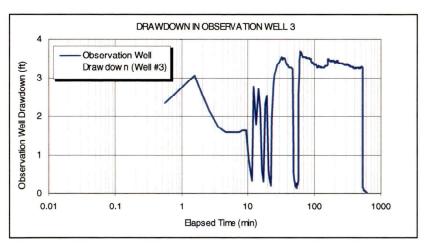

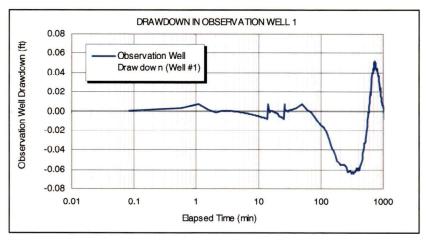

NOTES:

- Well 4 was pumped at an average flow rate of 305 gpm for 8 hours
- A drawdown response was not measured in Well 3 (located 59 feet away; above)
- No Drawdown was observed in Wells 1 and 2 (located 4,125 and 4,012 feet away, respectively)

NOTES:

- Well 2 was pumped at an average flow rate of 245 gpm for 8 hours
- A drawdown response was not measured in Well 1 (located 138 feet away; above)
- No Drawdown was observed in Wells 3 and 4 (located 3,962 and 4,012 feet away, respectively)

Drawdown Responses During 8-hour Aquifer Tests of Wells 4 and 2
Salish Shores PWS
Thompson Falls, Montana
Appendix B-3

Figure B-4
PROJECTED DRAWDOWN IN WELL 3

Salish Shores PWS Thompson Falls, Montana

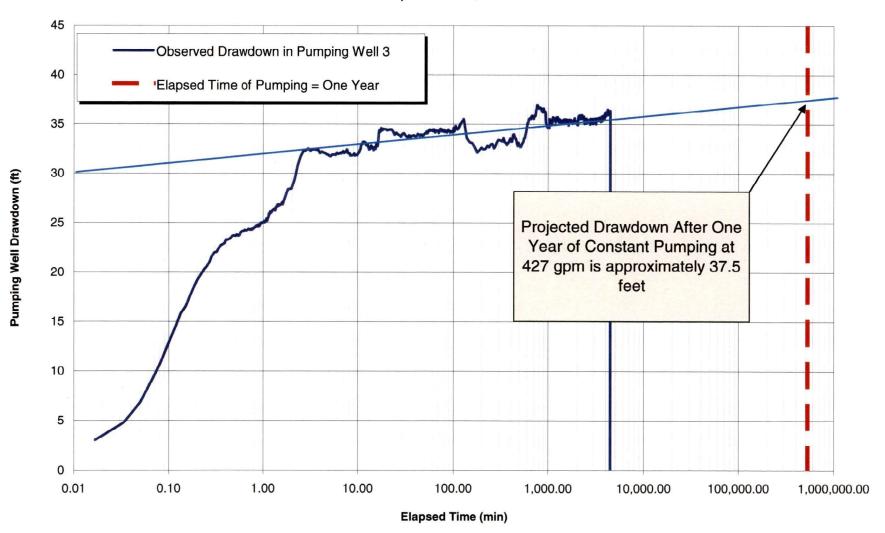


FIGURE B-5
PROJECTED DRAWDOWN IN WELL 4

Salish Shores PWS Thompson Falls, Montana

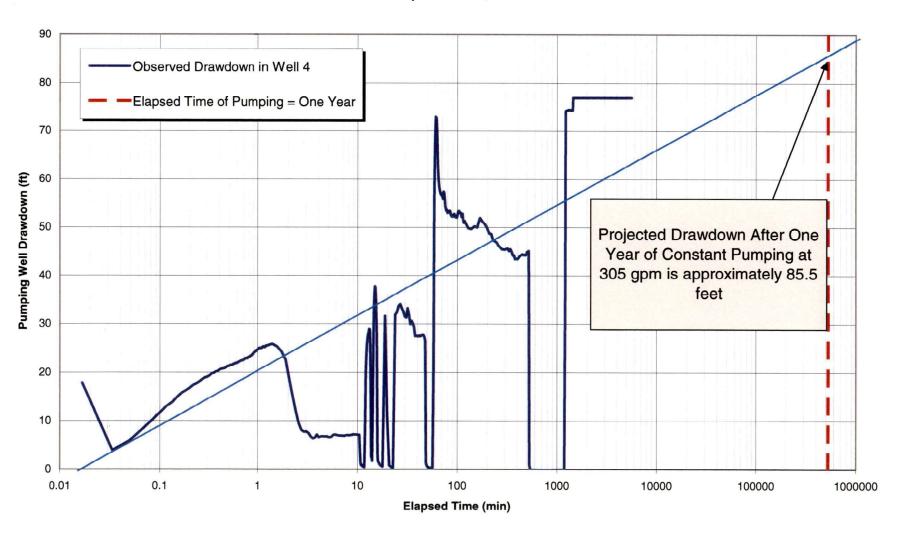


Figure B-6
PROJECTED DRAWDOWN IN WELL 1

Salish Shores PWS


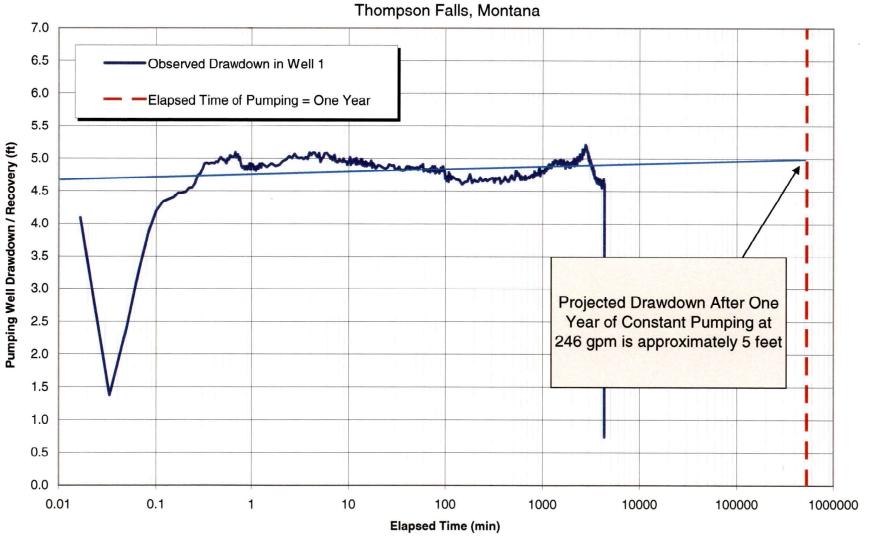


Figure B-7
PROJECTED DRAWDOWN IN WELL 2

Salish Shores PWS Thompson Falls, Montana

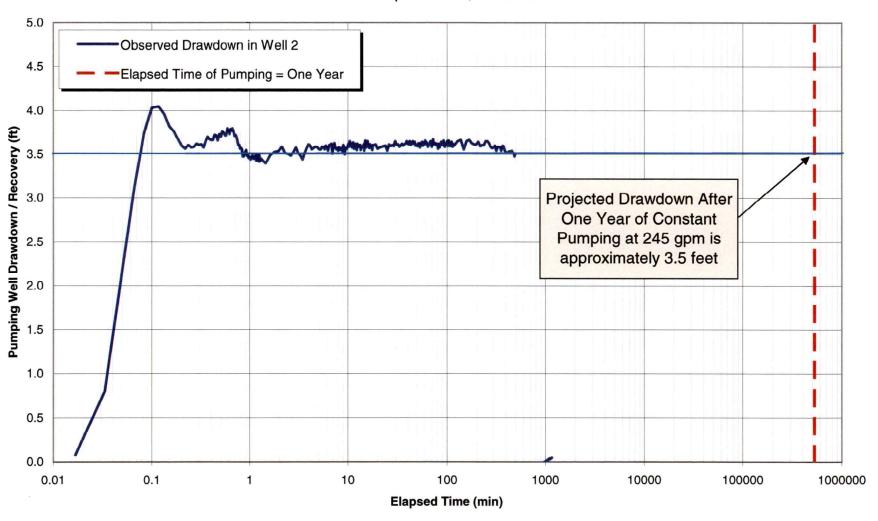

APPENDIX C

SUMMARY OF GROUNDWATER RIGHTS WITHIN ZONE OF INFLUENCE

Table C-1
Groundwter Rights Within the Zone of Influence of Sallsh Shores Wells


	<u> </u>				Maximum				<u> </u>
	111-4 Di-ba (6	-	Flow Rate	W-11 D15	Volume (ac-	Period of Use	Course Name	Dalat of Bissanian	
76L 110537 00	Water Right Key 194811-1	Type GROUND WATER CERTIFICATE	(gpm) 11	Well Depth	ft/yr) 1.63	(yyyymmdd) 19991222	Source Name	Point of Diversion WELL	Purpose of use DOMESTIC
76N 102576 00	181021-1	GROUND WATER CERTIFICATE	14	60	1.63	19971015	GROUNDWATER	WELL	DOMESTIC
76N 102576 00 76N 105272 00	185683-1	GROUND WATER CERTIFICATE	30	62	1.63	19980618	GROUNDWATER	WELL	DOMESTIC
76N 105272 00 76N 105358 00	185831-1	GROUND WATER CERTIFICATE	30	02	5.08	19980826	GROUNDWATER	WELL	IRRIGATION
76N 105358 00	185955-1	GROUND WATER CERTIFICATE	18	361	8.91	19981016	GROUNDWATER	WELL	COMMERCIAL
76N 106882 00	188479-1	GROUND WATER CERTIFICATE	14	160	1.63	19990317	GROUNDWATER	WELL	DOMESTIC
76N 10882 00 76N 108174 00	190718-1	GROUND WATER CERTIFICATE	28	60	1.23	19990517	GROUNDWATER	WELL	DOMESTIC
	335230-1		10	198	1.63	19990521	GROUNDWATER	WELL	DOMESTIC
76N 108258 00		GROUND WATER CERTIFICATE	 	196	6.00	19460919			
76N 110855 00	303656-1	STATEMENT OF CLAIM	105	- 040			GROUNDWATER	WELL	MUNICIPAL
76N 111205 00	335656-1	GROUND WATER CERTIFICATE	12	240	2.63	20000503	GROUNDWATER	WELL	MULTIPLE DOMESTIC
76N 114059 00	200893-1	GROUND WATER CERTIFICATE	10	340	2.62	20001208	GROUNDWATER	WELL	COMMERCIAL
76N 115858 00	203891-1	GROUND WATER CERTIFICATE	33	380	9.57	20010608	GROUNDWATER	WELL	DOMESTIC
76N 11614 00	29611-1	STATEMENT OF CLAIM	25		1.50	19580807	GROUNDWATER	WELL	DOMESTIC
76N 117649 00	206740-1	GROUND WATER CERTIFICATE	20	160	1.63	20011001	GROUNDWATER	WELL	DOMESTIC
76N 118301 00	207445-1	STATEMENT OF CLAIM	221	ļ. ——	26.00	19040604	UNNAMED TRIBUTARY OF CLARK FORK RIVER	PUMP	IRRIGATION
76N 118303 00	207447-1	STATEMENT OF CLAIM	25			19080227	MASS SPRING	FLOWING	STOCK
76N 118307 00	207450-1	STATEMENT OF CLAIM	25		5.00	19080227	MASS SPRING	MULTIPLE	DOMESTIC
76N 12175 00	30588-1	GROUND WATER CERTIFICATE	99	250	45.00	19770411	GROUNDWATER	WELL	DOMESTIC
76N 12846 00	31771-1	GROUND WATER CERTIFICATE	4	190		19770516	GROUNDWATER	WELL	DOMESTIC
76N 133264 00	306494-1	STATEMENT OF CLAIM	15		2.00	19470801	GROUNDWATER	WELL	DOMESTIC
76N 14217 00	34143-1	STATEMENT OF CLAIM	25		1.50	19480430	UNNAMED TRIBUTARY OF CLARK FORK RIVER	PUMP	DOMESTIC
76N 14218 00	34145-1	STATEMENT OF CLAIM	25			19480430	UNNAMED TRIBUTARY OF CLARK FORK RIVER	PUMP	STOCK
76N 15084 00	35638-1	GROUND WATER CERTIFICATE	14	166	1.50	19770907	GROUNDWATER	WELL	DOMESTIC
76N 163922 00	246966-1	STATEMENT OF CLAIM	8		3.00	19820430	GROUNDWATER	WELL	COMMERCIAL
76N 23427 00	50149-1	GROUND WATER CERTIFICATE	10	250	1.50	19790703	GROUNDWATER	WELL	DOMESTIC
76N 24080 00	51284-1	GROUND WATER CERTIFICATE	10	168	1.50	19790726	GROUNDWATER	WELL	DOMESTIC
76N 24080 01	51283-1	GROUND WATER CERTIFICATE	10		1.50	19790726	GROUNDWATER	WELL	DOMESTIC
76N 26937 00	56237-1	GROUND WATER CERTIFICATE	40	89	17.80	19800318	GROUNDWATER	WELL	DOMESTIC
76N 28000 00	58084-1	GROUND WATER CERTIFICATE	50	303	16.80	19800130	GROUNDWATER	WELL	IRRIGATION
76N 28108 00	58274-1	GROUND WATER CERTIFICATE	15	170	1.50	19800714	GROUNDWATER	WELL	DOMESTIC
76N 28561 00	59065-1	GROUND WATER CERTIFICATE	12	79	1.50	19800807	GROUNDWATER	WELL	DOMESTIC
76N 30001426	337965-1	GROUND WATER CERTIFICATE	20	424	6.15.	20010326	GROUNDWATER	WELL	DOMESTIC
76N 30001804	338302-1	GROUND WATER CERTIFICATE	22	60	2.25	20010529	GROUNDWATER	WELL	DOMESTIC
76N 30007033	343027-1	GROUND WATER CERTIFICATE		60		20030728	GROUNDWATER	WELL	DOMESTIC
76N 30008329	344217-1	GROUND WATER CERTIFICATE	 			20031008	GROUNDWATER	WELL	DOMESTIC
76N 30009277	344965-1	GROUND WATER CERTIFICATE	<u> </u>	180		20031229	GROUNDWATER	WELL	DOMESTIC
76N 30010393	346057-1	GROUND WATER CERTIFICATE	 - 	60		20040422	GROUNDWATER	WELL	DOMESTIC
76N 30013410	348823-1	GROUND WATER CERTIFICATE	 	60		20041214	GROUNDWATER	WELL	DOMESTIC
76N 30066 00	61675-1	GROUND WATER CERTIFICATE	14	35	1.52	19800729	GROUNDWATER	WELL	DOMESTIC
	62927-1	STATEMENT OF CLAIM	250	35	4.05		GROUNDWATER	WELL	INDUSTRIAL
76N 30785 00			10		1.50	19720922		WELL	
76N 34960 00	324523-1	GROUND WATER CERTIFICATE		 		19810724	GROUNDWATER		DOMESTIC
76N 35443 00	71035-1	GROUND WATER CERTIFICATE	10		1.51	19810416	GROUNDWATER	WELL	DOMESTIC
76N 3659 00	292206-1	STATEMENT OF CLAIM	60		48.51	19050311	UNNAMED TRIBUTARY OF CLARK FORK RIVER	PUMP	COMMERCIAL
76N 36832 00	73451-1	GROUND WATER CERTIFICATE	30		5.50	19810929	GROUNDWATER	WELL	DOMESTIC
76N 44521 00	86808-1	GROUND WATER CERTIFICATE	20	<u> </u>	1.50	19820430	GROUNDWATER	WELL	DOMESTIC
76N 47137 00	91339-1	GROUND WATER CERTIFICATE	20	<u> </u>	1.61	19820415	GROUNDWATER	WELL	DOMESTIC
76N 48012 00	92858-1	GROUND WATER CERTIFICATE	30	46	1.50	19820722	GROUNDWATER	WELL	DOMESTIC
76N 52687 00	100454-1	GROUND WATER CERTIFICATE	10	300	1.50	19830502	GROUNDWATER	WELL	COMMERCIAL
76N 54303 00	103233-1	GROUND WATER CERTIFICATE	20		1.50	19831109	GROUNDWATER	WELL	COMMERCIAL
76N 54324 00	103267-1	GROUND WATER CERTIFICATE	50	75	3.50	19831121	GROUNDWATER	WELL	DOMESTIC
76N 54346 00	103309-1	GROUND WATER CERTIFICATE	8		4.40	19831202	GROUNDWATER	WELL	COMMERCIAL
76N 56282 00	327725-1	GROUND WATER CERTIFICATE	10	250	1.50	19840516	GROUNDWATER	WELL	DOMESTIC
76N 57595 00	108900-1	GROUND WATER CERTIFICATE	20	48	0.75	19840920	GROUNDWATER	WELL	DOMESTIC
76N 5784 00	15781-1	GROUND WATER CERTIFICATE	20	250		19750623	GROUNDWATER	WELL	DOMESTIC


Table C-1
Groundwier Rights Within the Zone of Influence of Salish Shores Wells


		· ·	Flow Rate		Maximum Volume (ac-	Period of Use			
Water Right	Water Right Key	Туре	(gpm)	Well Depth	ft/yr)	(yyyymmdd)	Source Name	Point of Diversion	Purpose of use
76N 60114 00	112893-1	GROUND WATER CERTIFICATE	40	175	1.50	19850528	GROUNDWATER	WELL	DOMESTIC
76N 61930 00	115803-1	GROUND WATER CERTIFICATE	40	176	1.50	19851122	GROUNDWATER	WELL	DOMESTIC
76N 62987 00	117634-1	GROUND WATER CERTIFICATE	_ 15	177	1.50	19860522	GROUNDWATER	WELL	DOMESTIC
76N 64921 00	328980-1	GROUND WATER CERTIFICATE	50	327	1.50	19861023	GROUNDWATER	WELL	DOMESTIC
76N 6526 00	319727-1	GROUND WATER CERTIFICATE	· 50		[]	19750924	GROUNDWATER	WELL	DOMESTIC
76N 66581 00	123830-1	GROUND WATER CERTIFICATE	30		6.12	19871005	GROUNDWATER	WELL	DOMESTIC
76N 67268 00	329333-1	GROUND WATER CERTIFICATE	15	180	1.50	19871029	GROUNDWATER	WELL	DOMESTIC
76N 68893 00	127814-1	GROUND WATER CERTIFICATE	4		1.50	19880906	GROUNDWATER	WELL	DOMESTIC
76N 745 00	2090-1	STATEMENT OF CLAIM	25		1.50	19631231	GROUNDWATER	WELL	DOMESTIC
76N 75091 00	138540-1	GROUND WATER CERTIFICATE	20		3.00	19900713	GROUNDWATER	WELL	MULTIPLE DOMESTIC
76N 78605 00	331024-1	GROUND WATER CERTIFICATE	10	318	9.87	19910807	GROUNDWATER	WELL	DOMESTIC "
76N 81487 00	331455-1	GROUND WATER CERTIFICATE	20	258	5.23	19920416	GROUNDWATER	WELL	COMMERCIAL
76N 81506 00	331457-1	GROUND WATER CERTIFICATE	20	200	1.00	19920430	GROUNDWATER	WELL	DOMESTIC
76N 81519 00	331459-1	PROVISIONAL PERMIT	110	141	48.90	19920514	GROUNDWATER	WELL	MULTIPLE DOMESTIC
76N 85001 00	153252-1	EXEMPT RIGHT	20		14.35	19480601	GROUNDWATER	DEVELOPED SPRING	DOMESTIC
76N 85780 00	153922-1	PROVISIONAL PERMIT	210	246	104.32	19930601	GROUNDWATER	WELL	MULTIPLE DOMESTIC
76N 87539 00	155454-1	GROUND WATER CERTIFICATE	20	36	2.63	19930920	GROUNDWATER	WELL	MULTIPLE DOMESTIC
76N 87598 00 ·	155504-1	GROUND WATER CERTIFICATE	20	204	3.58	19931014	GROUNDWATER	WELL	DOMESTIC
76N 88546 00	156802-1	GROUND WATER CERTIFICATE	10	60	2.88	19931118	GROUNDWATER	WELL	DOMESTIC
76N 88576 00	156856-1	GROUND WATER CERTIFICATE	10		0.11	19931209	GROUNDWATER	WELL	COMMERCIAL
76N 88630 00	332401-1	GROUND WATER CERTIFICATE	30	62	1.63	19940106	GROUNDWATER	WELL	DOMESTIC
76N 89272 00	158062-1	GROUND WATER CERTIFICATE	12.9	240	2.70	19940408	GROUNDWATER	WELL	MULTIPLE DOMESTIC
76N 91030 00	161093-1	GROUND WATER CERTIFICATE	35	200	1.63	19940809	GROUNDWATER	WELL	DOMESTIC
76N 93062 00	164591-1	GROUND WATER CERTIFICATE	.10	100	0.97	19941219	GROUNDWATER	WELL	DOMESTIC
76N 94358 00	166834-1	GROUND WATER CERTIFICATE	35	1	3.92	19950406	GROUNDWATER	WELL	INDUSTRIAL
76N 95899 00	169455-1	GROUND WATER CERTIFICATE	12	200	1.63	19951215	GROUNDWATER	WELL ·	DOMESTIC
76N 97148 00	333634-1	GROUND WATER CERTIFICATE	5	140	1.05	19960116	GROUNDWATER	WELL	DOMESTIC
76N 97261 00	171807-1	GROUND WATER CERTIFICATE	32	150	4.50	19960509	GROUNDWATER	WELL	LAWN AND GARDEN
76N 97278 00	171837-1	PROVISIONAL PERMIT	440	367	25.98	19960517	GROUNDWATER	WELL	COMMERCIAL
76N 97311 00	171895-1	GROUND WATER CERTIFICATE	13	. 381	0.30	19960606	GROUNDWATER	WELL	COMMERCIAL
76N 9986 00	26518-1	STATEMENT OF CLAIM	20		1.50	19530501	GROUNDWATER	WELL	DOMESTIC
76N 99865 00	176322-1	GROUND WATER CERTIFICATE	10	166	0.02	19961202	GROUNDWATER	WELL	LAWN AND GARDEN
76N 99866 00	176325-1	GROUND WATER CERTIFICATE	10	340	1.63	19961202	GROUNDWATER	WELL	DOMESTIC
76N 99870 00	176331-1	GROUND WATER CERTIFICATE	14	50	1.63	19961204	GROUNDWATER	WELL	DOMESTIC
			Total 1	Volume:	523.75		,		


APPENDIX D

TIME-FLOW RATE PLOTS

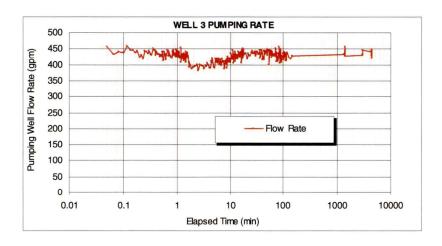

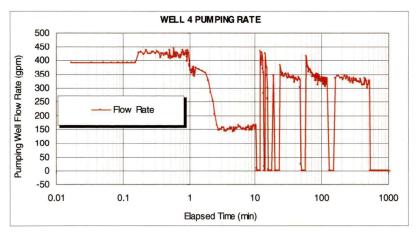

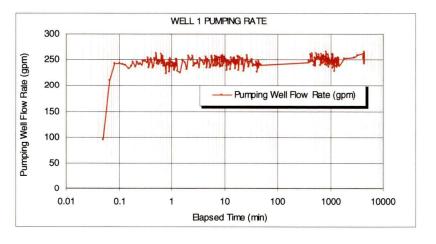

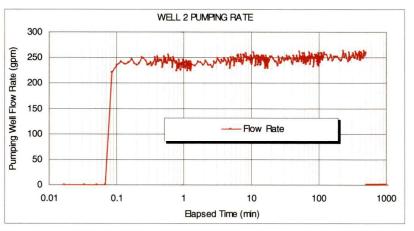

Pumping Well Flow Rates During Each Aquifer Test
Salish Shores PWS
Thompson Falls, Montana
Appendix D

Form 606P, Question 71.a - Adequacy of Diversion						
Application #: 30165123						
Well ID	GWIC ID	Well Depth				
1	135335	121				
2	131977	141				
3	139319	240				
4	139318	246				
5	175584	367				
6	175632	355				
7	175585	423				

^{**}Please note that these Well IDs correspond with those shown on the proposed and existing exhibits submitted with this application package.

SALISH SHORES UTILITY CORP INC APPLICATION TO CHANGE A WATER RIGHT NO. 76N 30165123 FORM 606P AMENDED RESPONSES

8) Proposed Point of Diversion Location

POD#	1/4	1/4	1/4	SEC	TWP	RGE	COUNTY	SOURCE	MEANS
8	NE	NW	NW	15	21N	29W	Sanders	GW	Well



PREAPPLICATION MEETING FEE \$ 500

FILING FEE REDUCTION & EXPEDITED TIMELINE

An application will be eligible for a filing fee reduction and expedited timelines if the applicant completes a preapplication meeting with the Department (ARM 36.12.1302(1)), which includes submitting any follow-up information identified by the Department (ARM 36.12.1302(3)(c)) and receiving either Department-completed technical analyses or Department review of applicant-submitted technical analyses (ARM 36.12.1302(4) and (5)). An application for the proposed project also must be submitted within 180 days of delivery of Department technical analyses or scientific credibility review and no element on the submitted application can be changed from the completed preapplication meeting form (ARM 36.12.1302(6)).

For Department Use Only

Application # 30165123	Basin 76N	
Meeting Date 1/8/2025	Time 13:00	AM/PM
Completed Form Deadline 7/		. roleiH
RECEI	VED	areff (
DNRC Water	Resources	
JAN 31		
Kalispeli	Unit	
	Water	
Completed Form Received_	1.31.20	25
Fee Rec'd \$ 500	Check #	577
Deposit Receipt # M55	251349	19
Payor IMEG COY	ρ.	Leiuca ()
D (10	D-4-	

The Department will fill out Form No. 606P and will identify follow-up during the preapplication meeting. The Department and Applicant will sign the Preapplication Meeting Affidavit and Certification within five business days. Within 180 days of the preapplication meeting, the Applicant will complete identified follow-up on a separate document with the question numbers clearly labeled.

A	pplic	cant	Information:	Add	more	as	necessary	
			0 0 1 01 11000					

Applicant Name Salish Shores Utility Corp. LLC			MAN
Mailing Address PO Box 1030	City_Thompson Falls	State MT_	Zip <u>59873</u>
Phone Numbers: Home	Work	Cell	W. 100-100-100-100-100-100-100-100-100-100
Email Address			
Applicant Name			
Mailing Address	City	State	Zip
Phone Numbers: Home	Work	Cell	
Email Address			
Contact/Representative Information Contact/Representative is: Application	atiop: Add more as pecessary.		
Contact/Representative is: Applica	ant	Other (describ	oe)
Contact/Representative Name Bryan G	Sartland, Aspect Consulting	·	
Mailing Address PO Box 134	City Helena	State MT	Zip <u>59624</u>
Phone Numbers: Home 406.599.7840	Work	Cell	
Email Address bryan gartland@aspect	consulting.com		
	d as an attorney, all communication will be se	nt only to the attorney to	unless the attorney

provides written instruction to the contrary. If a contact person is identified as a consultant, employee, or lessee, the individual filing the water right form or objection form will receive all correspondence and a copy may be sent to the contact person.

Meeting Attendees: Add more as necessary.

Name	Organization	Position
Ferch, Wilson, Kiel	DNRC	Water Resource Staff
Bryan Gartland	Aspect Consulting	Senior Scientist
Peter Scott	Scott Law	Legal Council
Todd Wakefield	Owner	
Jason Rice/David Fredlander	IMEG	Civil Engineer
Evan Norman	DNRC	Hydrologist

Table of Contents

Application Details Historical Use	
Historical Use: Place of Use Historical Use: Point of Diversion Historical Use: Period of Diversion Historical Use: Historical Diverted Volume Historical Use: Historical Consumed Volume Historical Use: Historical Places of Storage	
Surface Water	20
Surface Water: Return Flow Analysis Surface Water: Mitigation Analysis Surface Water: Aquifer Recharge Analysis	22
Groundwater	26
Groundwater: Adequacy of Diversion Groundwater: Adequacy of Diversion: Well/Pit Groundwater: Adequacy of Diversion: Developed Spring Groundwater: Adequacy of Diversion: Pond	27
Groundwater: Adverse Effect to Existing Groundwater Rights Groundwater: Adverse Effect to Surface Water Rights: Groundwater: Adverse Effect to Surface Water Rights: Surface Water Depletion Analysis Groundwater: Adverse Effect to Surface Water Rights: Return Flow Analysis	29
Groundwater: Mitigation	32
Project-Specific Questions.	34
Temporary Change Change in Purpose Change in Place of Storage Ditch-Specific Questions Water Marketing Instream Flow Change Salvage Water	35 36 37 41
Non-Mandatory Questions for Criteria Analysis	44
Adverse Effect: Evaluation of Impacts to Identified Water Rights for Return Flow Analysis	45
Adequate Means of Diversion and Operation	55
PREAPPLICATION MEETING AFFIDAVIT & CERTIFICATION	58 59

Application Details

The following questions are mandatory and must be filled out before the Preapplication Meeting Form is determined to be complete. Narrative responses that are larger than the space provided can be answered in an attachment. If an attachment is used, mark the see attachment ("A") checkbox on this form and label the attachment with the question number. Constrain narrative responses to the specific question as is asked on the form; do not respond to multiple questions in one narrative. Label units in narrative responses. Responses in the form of a table may be entered into the table provided on this form or in an attachment. Responses in the form of a table that are larger than the table provided on this form should be placed in an attachment. If an attachment is used, the table must have the exact headings found on this form, and the see attachment ("A") checkbox must be marked. For tables in this form, circle correct unit at header of column when faced with a choice of units. For tables in attachments, label all units. Questions that require Applicant to submit items to the Department have a submitted ("S") checkbox, which is marked when the required item is attached to the Preapplication Meeting Form. Label all submitted items with the question number for which they were submitted. For all questions where follow-up is necessary, mark the "F" checkbox in the "Follow-Up" column and write the question number on the "Follow-Up Page".

	Questions, Narrative Responses, and Tables	Check- boxes	Follow -Up
1.	. Do you elect to have DNRC conduct Technical Analyses?	■ Y □ N	□F
2.	Which water right(s) are proposed for change? Include water right number, currently authorized flow rate (GPM or CFS), and flow rate needed for project (GPM or CFS).	□ A	□F

Water Right Number	Current Flow Rate (GPM or CFS)	Flow Rate Needed for Project (GPM or CFS)
76N 30016270	688.5 GPM	688.5 GPM
76N 97278	440 GPM	440 GPM
76N 85780	210 GPM	210 GPM
76N 81519	110 GPM	110 GPM

3.	Is the proposed change on a non-filed water project?	□Y■N	□F
	a. If yes, please submit a Non-Filed Water Project Addendum (Form 606/634-NFWPA). The project must meet the requirements of the addendum. The addendum is required before the Preapplication Meeting Form is completed.	□S	□F
4.	How many change applications will be needed for this project? Please refer to ARM 36.12.1305 for more information. one		□ F
5.	Please submit a historical use map created on an aerial photograph or topographic map that shows the following: section corners, township and range, a north arrow, all historical points of diversion (POD) labeled with a unique POD ID letter, all historical places of use (POU), all historical conveyance structures, all historical places of storage, and historical place of	□S	■ F



		11 0 1 0	rlapp:	ing wa	ter righ	ts.											
6. Please submit a proposed use map created on an aerial photograph or topographic map that shows the following: section corners, township and range, a north arrow, all proposed points of diversion labeled with a unique POD ID number, all proposed places of use, all proposed conveyance structures, all proposed places of storage, and proposed place of use for all overlapping water rights.									S	■F							
7. Ide	ntify 1	the wa	ater ri	ight ele	ements	propos	ed for chan	ige, wi	th an "X	", for ea	ch water right	propos	ed for cha	inge.		A	□F
Water	r Rigl	ht#		76N 300)16270		76N 97278		76N 85780)	76N 81519						
Point			n	Х	(Х		Х		Х						
Place				Х	[X		Х		Х						
Purpo																	
Place	of sto	rage															
8. Do	es the	chan	ge inv	volve a	change	e in poi	nt of diver	sion?							I	$Y \square N$	\Box F
	a. I	f yes,	desc	ribe th	e propo	sed loc	ation of th	e new	point(s)	of divers	sion to the near	rest 10	acres, if s	ource is		A	□F
	9	groun	dwate	er (GW) or sui	rface w	ater (SW),	source	name, a	ınd meai	ns of diversion	(e.g., p	oump, hea	dgate, well). Label			
	I	POD 1	D wi	th the	same ni	umbers	as the proj	posed ı	ise map	(Questic	on 6).		_				
POD #	1/4	1/4	1/4	Sec	Twp	Rge	County	Lot	Block	Tract	Subdivision	Gov	GW or	Source Name	Mean	s	
π							Į.					Lot	SW				
8	NE	NE	NW	15	21N	29W	Sanders					Lot	GW	Groundwater		Well Diversion	on
	NE	NE	NW	15	21N	29W	Sanders					Lot		Groundwater		Well Diversion	on
	NE	NE	NW	15	21N	29W	Sanders					Lot		Groundwater		Well Diversion	on
	NE	NE	NW	15	21N	29W	Sanders					Lot		Groundwater		Well Diversion	on
	NE	NE	NW	15	21N	29W	Sanders					Lot		Groundwater		Well Diversion	on
	NE	NE	NW	15	21N	29W	Sanders					Lot		Groundwater		Well Diversion	on
	NE	NE	NW	15	21N	29W	Sanders					Lot		Groundwater		Well Diversion	on
8							Sanders ce of use?					Lot		Groundwater		Well Diversion	on ☐ F
8	es the	chan	ge inv									Lot		Groundwater			
8	es the	chan f yes,	ge inv	volve a	change	e in pla		osed pl	ace of us	se?		Lot		Groundwater		Y 🗆 N	
9. Do	es the	chan f yes,	ge inv	volve a	change the geo	e in pla	ce of use?	osed pl	ace of u	se?		Lot		Groundwater		Y 🗆 N	□ F
8	es the	chan f yes,	ge inv	volve a	change the geo	e in pla	ce of use?	osed pl	lace of us	se?		Lot		Groundwater		Y 🗆 N	□ F
9. Do	es the	chan f yes,	ge inv	volve a	change the geo	e in pla	ce of use?	osed pl	ace of u	se?		Lot		Groundwater		Y 🗆 N	□ F
9. Do	es the	chan f yes,	ge inv	volve a	change the geo	e in pla	ce of use?	osed pl	ace of u	se?		Lot		Groundwater		Y 🗆 N	□ F



		_			of use and, if the wanter of irrigated a	vater rights being o	changed will	□ A	■ F
Acres	Gov't Lot	1/4	1/4	1/4	Sec	Twp	Rge	Count	y
						·			
	Total		I	I	I	I			
b. A	are you proposing	to add a place	e of use on State	of Montana Trus	Land?			□Y■N	□F
	i. If yes, you	must submit	an Authorization	for Temporary C	Change in Appropr	riation Right Cons	ent Form	\Box S	□F
						n Meeting Form i			
	_					duration of the lea	ase term.		
		<u> </u>		<u> </u>	question 99 to 10				
	proposed change i	nclude a char	nge in purpose of	use? If yes, ansv	ver questions 106	to 109 for change	in purpose of	□Y■N	□F
use.	ropose to add or m	adificana an	mara mlaga(a) of	atamana (magamyai	m an mand) vyith a	stances conscitu e	mootom thom 0.1		
• •	ropose to add or m 'If yes, answer qu	•		storage (reservoi	r or pona) with a s	storage capacity g	reater than 0.1	□Y■N	□F
12. Are conv	eyance ditches use	d for historic	al or proposed us	es? If yes, answe	er ditch-specific qu	uestions 120 to 12	6.	□Y■N	□F
13. Do you h	ave ownership of	the entire hist	orical POU for th	ne water right(s) l	being changed?			■ Y □ N	□F
a. It	no,								
	i. List the wa	ter right(s) fo	r which you do n	ot own the entire	historical POU.				□F
	ii. Are the wa	ter right(s) lis	ted in question 1	3.a.i severed from	n the historical PC	OU?			□F
		- ,			er right(s) propose				

iii. Are you filing on behalf of another entity? If yes, describe.	□Y□N	□F
iv. Are all owners of the historical place of use willing to sign the application?	\square Y \square N	□F
1. If no,		
a. A Form 641 or 642 to split the water right(s) being changed must be received and processed by the Department prior to application submittal	□S	□F
b. Describe how the water right(s) will be split, and which part of the split water right(s) will be proposed for change.	□ A	□F
14. Is the proposed use temporary? If yes, answer questions 99 to 105 for temporary changes.	□Y■N	□F
15. Is the application to change the purpose of use or place of use of an appropriation of 4,000 or more acre-feet (AF) of water a year and 5.5 or more cubic feet per second (CFS)? If yes, you must submit a Reasonable Use Addendum (Form 606-B) with the application. The reasonable use criteria are found in §85-2-402(4-5), MCA.	□Y■N	□F
16. Will you be transporting water for use outside of Montana? If yes, you will need submit an Out-of-State Use Addendum (Form 600/606- OSA) with the application. The out-of-state use criteria are outlined in §85-2-402(6), MCA.	□Y■N	□F
17. Is the project located in designated sage grouse habitat? If yes, you must have a consultation with and review of your project by the Montana Sage Grouse Habitat Conservation Program. The review letter will be required at application submittal.	□Y■N	□F
18. Does the application include the water marketing purpose? If yes, answer questions 127 to 134 for water marketing. A Water Marketing Purpose Addendum (Form 600/606-WMA) will be required with application submittal.	□Y■N	□F
19. Does the proposed purpose include instream flow? If yes, answer questions 135 to 145 for Instream Flow Changes. A Change to Instream Flow Addendum (Form 606-IFA) will be required with application submittal.	□Y■N	□F
20. Will the proposed use include salvage water? If yes, answer questions 146 to 150 for Salvage Water.	□Y■N	□ F

Historical Use

The following questions are mandatory and must be filled out for both Surface Water and Groundwater Applications before the Preapplication Meeting Form is determined to be complete.

		Questions, Narrativ	e Responses, and Tables			Check- boxes	Follow -Up
21.	21. What type of water right(s) are proposed for change? Answer question 22 for each Statement of Claim, 23 for each Provisional Permit, and 24 for other types of water rights. one unperfected and three perfected municipal permits						
22.	Claim" column. If the authorizations in the "none" instead. Write Completion Notice" c "none" instead. In the conducted for the prev "Use Historical Use A	ite the water right number for each Size is one or more previous change at Previous Change Authorization" could the date of the Project Completion I column and if the previous change at "Previous Historical Use Analysis" vious change authorization, and "nor analysis for Current Application" couplication and "no" if a new historical	uthorizations, write the application lumn and if there are no previous Notice for each previous change a athorization does not have a Projet column, write "full" or "partial" ne" if no previous historical use as lumn, write "yes" if the previous	n numbers for the change change authorizations, wrauthorization in the "Projec ct Completion Notice, write if a historical use analysis nalysis was conducted. In this historical use analysis will	ite et te was the	□ A	□F
St	atement of Claim	Previous Change Authorization	Project Completion Notice	Previous Historical Use Analysis		storical Use A	•
23.	23. In the table below, write the water right number for each Provisional Permit proposed for change in the "Provisional Permit" column. If a Project Completion Notice has been submitted, write the date in the "Project Completion Notice" column, and if no Project Completion Notice has been submitted, write "none" instead. For each Provisional Permit proposed for change, if there are one or more previous change authorizations, write the application number for the change authorizations in the "Previous Change Authorization" column. If there are no previous change authorizations, write "none" in the "Previous Change Authorization" column and "NA" in all the remaining columns. Write the date of the Project						



Completion Notice for each previous change authorization in the "Previous Change Project Completion Notice" column and if the previous change authorization does not have a Project Completion Notice, write "none" instead. In the "Previous Change Historical Use Analysis" column, write "full" or "partial" if a historical use analysis was conducted for the previous change authorization, and "none" if no previous historical use analysis was conducted. In the "Use Historical Use Analysis for Current Application" column, write "yes" if the previous historical use analysis will be used for the current application, "no" if a new historical use analysis will be conducted. **Previous Change Authorization Previous Change Previous Change Provisional Permit Project** Use Historical Use **Completion Project** Historical Use **Analysis for Current Application Notice Completion Notice** Analysis 12/31/2031 76N 30016270 due12/31/2031 76N 30027719 1/16/2008-full yes 76N 97278 6/26/2007 76N 30027719 12/31/2031 1/16/2008-full ves 76N 85780 6/26/2007 76N 30027719 12/31/2031 1/16/2008-full yes 1/16/2008-full 76N 81519 1/18/2005 76N 30027719 12/31/2031 yes 24. In the table below, write the water right number for each water right with another type proposed for change, the type of \square A \square F water right, and the date of issuance. **Other Water Right Type Number Other Water Right Type Description Date of Issuance** 25. Are there previous Montana Water Court approved stipulations, Water Master reports, or prior Montana Water Court or \Box F $\blacksquare Y \sqcap N$ Department decisions related to the water right(s) being changed? a. If yes, explain. \square A \square F 2007 Change (76N 30027719)- establishment of municipal purpose of use

Right Number" list a Analysis Options" ar Historical Use Analy analysis. If the "Exis	26. Fill in the table below based on ARM 36.12.1902(1) and the information provided in questions 21 to 25. In column "Water Right Number" list all water rights proposed for change. Select one of the three options from column "Historical Use Analysis Options" and fill in the "Information Required for Historical Use" associated with that option. Select "Full Historical Use Analysis NA" only if an unperfected Provisional Permit will be used to serve as historical use in lieu of analysis. If the "Existing Historical Use Analysis" or "Full Historical Use Analysis NA" option is selected, skip to question 42 because this section is complete.						
Water Right No. Proposed for Change	Historical Use Analysis Option and Information Required for Historical Use						
- V	☐ New Historical Use Analysis. Date for new Historical Use Analysis:						
76N 30016270	☐ Existing Historical Use Analysis. Change authorization number with existing Historical Use Analysis:						
	Full Historical Use Analysis NA. Water right number serving as historical use in lieu of analysis: NA- unperfected, brings forth full flow	w rate and vol	ume 				
	☐ New Historical Use Analysis. Date for new Historical Use Analysis:						
76N 97278	Existing Historical Use Analysis. Change authorization number with existing Historical Use Analysis: 76N 30027719						
	☐ Full Historical Use Analysis NA. Water right number serving as historical use in lieu of analysis:						
	☐ New Historical Use Analysis. Date for new Historical Use Analysis:						
76N 85780	Existing Historical Use Analysis. Change authorization number with existing Historical Use Analysis: 76N 30027719						
	☐ Full Historical Use Analysis NA. Water right number serving as historical use in lieu of analysis:						

	☐ New Historical Use Analysis. Date for new Historical Use Analysis:						
76N 81519	Existing Historical Use Analysis. Change authorization number with existing Historical Use Analysis: 76N 30027719						
	☐ Full Historical Use Analysis NA. Water right number serving as historical use in lieu of analysis:						
	☐ New Historical Use Analysis. Date for new Historical Use Analysis:						
	☐ Full Historical Use Analysis NA. Water right number serving as historical use in lieu of analysis:						
	☐ New Historical Use Analysis. Date for new Historical Use Analysis:						
	☐ Existing Historical Use Analysis. Change authorization number with existing Historical Use Analysis:						
	☐ Full Historical Use Analysis NA. Water right number serving as historical use in lieu of analysis:						
27. Do you have actual l	knowledge of historical use?	■ Y □ N	□F				
a. If yes,							
i. Is th	is firsthand knowledge?	\blacksquare Y \square N	□ F				
ii. Who has this knowledge and what was their role? Salish Shores Utilities has kept utility records							

b. If no,				
i.	Where will the his	storical use data be derived?	□ A	□F
Historical Us	se: Place of Use			
28. The historical us	■ Y □ N	□F		
		of use. Does your historical use map meet this requirement?		
1		rater right(s) associated with the historical place of use?	■ Y □ N	□F
	•	ght(s) associated with the historical place of use that are not included in this application.	□ A	□ F
		or each water right and explain why all overlapping water rights are not included in the		
	1	received via contract from a company, district, or water users' association.		
Water Right No.	Priority Date	Reason Not Included in Change		
		d to the historical purpose for each of the water right(s) being changed.		
a. Irrigatio				
i.	Is the water right l	being changed a Statement of Claim?	\square Y \square N	□ F
	1. If yes,			
	a. D	oes the Water Resources Survey corroborate the acres irrigated listed on the abstract?	\square Y \square N	□F
		i. If no, provide aerial photograph(s) that can corroborate the historical place of use.	\square S	□F
		oes the legal land description from the abstract match the actual location of the historical	\square Y \square N	□F
	pl	ace of use?		
		i. If no, provide documentation of a written request submitted to the Water Court for	\square S	□F
		amendment of the Claim as well as information to substantiate the requested		
		amendment.		



		no, provide one or more aerial photographs that can corroborate the historical place of use.	\square S	□F
b.	. Lawn and garden			
		rial photographs that can corroborate the historical place of use.	\square S	□F
c.	. Stock			
	i. Provide ae	rial photographs, grazing records, or other records to corroborate the historical place of use.	\square S	□ F
	\square Y \square N	□ F		
	1. If	no, provide data sources that make clear the location of the stock watering infrastructure.		□F
d.	. Multiple domestic,	domestic, municipal, mining, commercial, and other purposes		
	i. Provide ae	rial photographs, deeds, other recorded documents or records, affidavits, or other published		■ F
	documents	, such as magazine articles, to corroborate the historical place of use.		
	storical Use: Point o			
1	•	f diversion, identify the means, location (1/4 1/4 section), and if they are proposed for change	e.	■ F
		ID letter as for the Historical Use Map (question 5).		-
POD Means Location (1/4 1/4 Section) Prop				nge?
I			Troposed for end	g
ID		, , ,	•	
ID 1,2	WELL	SWSWSE SEC 15, T21N, R29W	NO	g.v
1,2 3,4	WELL WELL	SWSWSE SEC 15, T21N, R29W SWNESE SEC 15, T21N, R29W	•	
ID 1,2	WELL	SWSWSE SEC 15, T21N, R29W	NO NO	
1,2 3,4	WELL WELL	SWSWSE SEC 15, T21N, R29W SWNESE SEC 15, T21N, R29W	NO NO	
1,2 3,4 5,6,7	WELL WELL WELL	SWSWSE SEC 15, T21N, R29W SWNESE SEC 15, T21N, R29W NESWNW SEC 15, T21N, R29W	NO NO	
1,2 3,4 5,6,7	WELL WELL WELL the legal land descrip	SWSWSE SEC 15, T21N, R29W SWNESE SEC 15, T21N, R29W NESWNW SEC 15, T21N, R29W tion from the abstract match the actual location of the historical point(s) of diversion?	NO NO	□ F
1,2 3,4 5,6,7	WELL WELL WELL the legal land descrip	SWSWSE SEC 15, T21N, R29W SWNESE SEC 15, T21N, R29W NESWNW SEC 15, T21N, R29W	NO NO NO	
1,2 3,4 5,6,7	WELL WELL WELL the legal land descrip	SWSWSE SEC 15, T21N, R29W SWNESE SEC 15, T21N, R29W NESWNW SEC 15, T21N, R29W tion from the abstract match the actual location of the historical point(s) of diversion?	NO NO NO	□ F
1,2 3,4 5,6,7	WELL WELL WELL the legal land descrip If no, do you have i. If yes, 1. Pro	SWSWSE SEC 15, T21N, R29W SWNESE SEC 15, T21N, R29W NESWNW SEC 15, T21N, R29W tion from the abstract match the actual location of the historical point(s) of diversion? aerial photograph(s) that clearly show the location of the historical point(s) of diversion?	NO NO NO NO	□ F
1,2 3,4 5,6,7	WELL WELL WELL the legal land descrip If no, do you have i. If yes, 1. Pro	SWSWSE SEC 15, T21N, R29W SWNESE SEC 15, T21N, R29W NESWNW SEC 15, T21N, R29W tion from the abstract match the actual location of the historical point(s) of diversion? aerial photograph(s) that clearly show the location of the historical point(s) of diversion?	NO NO NO NO	□ F
32. Does	WELL WELL WELL the legal land descrip If no, do you have i. If yes, 1. Pro 2. Pro a v	SWSWSE SEC 15, T21N, R29W SWNESE SEC 15, T21N, R29W NESWNW SEC 15, T21N, R29W tion from the abstract match the actual location of the historical point(s) of diversion? aerial photograph(s) that clearly show the location of the historical point(s) of diversion? ovide the photograph(s). ovide an explanation for the discrepancy and, if a Statement of Claim, provide documentation ovitten request submitted to the Water Court for amendment of the Claim.	NO NO NO NO	□ F □ F □ F
32. Does	WELL WELL WELL the legal land descrip If no, do you have i. If yes, 1. Pro 2. Pro a v	SWSWSE SEC 15, T21N, R29W SWNESE SEC 15, T21N, R29W NESWNW SEC 15, T21N, R29W tion from the abstract match the actual location of the historical point(s) of diversion? aerial photograph(s) that clearly show the location of the historical point(s) of diversion? ovide the photograph(s). ovide an explanation for the discrepancy and, if a Statement of Claim, provide documentation	NO NO NO NO	□ F □ F □ F
32. Does 33. Answ	WELL WELL WELL the legal land descrip If no, do you have i. If yes, 1. Pro 2. Pro a ver questions below recovered. Headgate	SWSWSE SEC 15, T21N, R29W SWNESE SEC 15, T21N, R29W NESWNW SEC 15, T21N, R29W tion from the abstract match the actual location of the historical point(s) of diversion? aerial photograph(s) that clearly show the location of the historical point(s) of diversion? ovide the photograph(s). ovide an explanation for the discrepancy and, if a Statement of Claim, provide documentation ovitten request submitted to the Water Court for amendment of the Claim. lated to the diversion means for each of the historical point(s) of diversion.	NO NO NO NO NO O O O O O O O O O O O O	□ F □ F □ F
32. Does 33. Answ	WELL WELL WELL the legal land descrip If no, do you have i. If yes, 1. Proceeding the second of	SWSWSE SEC 15, T21N, R29W SWNESE SEC 15, T21N, R29W NESWNW SEC 15, T21N, R29W tion from the abstract match the actual location of the historical point(s) of diversion? aerial photograph(s) that clearly show the location of the historical point(s) of diversion? ovide the photograph(s). ovide an explanation for the discrepancy and, if a Statement of Claim, provide documentation ovitten request submitted to the Water Court for amendment of the Claim.	NO NO NO NO NO Of A	□ F □ F □ F

estimate historical capacity. Label using the same POD ID letter as for the Historical Use Map (question 5).



Historical Use 12

	POD ID	Dimensions (FT)	Slope (%)	Material	Estimated Capacity (GPM or CFS)	Method		
		,						
b. Pump, dike, dam, or other surface water point of diversion								
	i. For each pump, dike, dam, or other surface water point of diversion, provide an estimate of the historical							
			• \	/		istorical capacity. Label using the same POD		
				he Historical Use Ma	ap (question 5).			
	POD	Estimated Ca		Method				
	ID	(GPM or CFS	S)					
J								
	c.	Well pit or	other ground	dwater point of diver	rsion			
	С.					ovide an estimate of the historical capacity	□ A	■ F
				,		capacity. Label using the same POD ID letter		— 1
		,	,	ical Use Map (questi		capacity. Laber using the same 1 OD 1D letter		
1	POD	Estimated Ca		Method	ion <i>5</i>).			
	ID	(GPM or CF)		icinou				
	1,2,3,4	246,245,427,3	_		Geo	matix (2005) pumping rates		
	5, 7	160, 75 G	PM			GWIC log air test rates		
	6	240 GP	M		Gl	VIC log pumping test rate		
_								
	34. Do otl	her water rights	share the p	oint(s) of diversion?			□Y■N	□F
	a.	If yes, list the	e water right	ts, their flow rates (C	GPM or CFS), and the nat	ture of the relationship. Label using the same	\Box A	□F
		•	_	Historical Use Map	* *			
					·-			



POD ID	Water Right No.	Flow (GPM or CFS)	Relationship			
		1				
		1				
		-				
Hi	storical Use: Period	d of Diversion				
35. Are t	he period of diversion	n and the period	of use the same?		■ Y □ N	□F
a	. If no,					
	i. Why are t	hey different?			□ A	□F
	ii. Is there a	place of storage	?		\square Y \square N	□F
36. When	was water diverted	for the purpose(s) of the water right(s) being	changed?	□ A	□F
Start D	ate (Month (MM)/D	ay (DD))		End Date (MM/DD)	•	
		1/1		12/31		
27. D	.1. 15	1 1 0	1: 100100000000000000000000000000000000	. 1 01:	T	
	the Department have is used?	e a standard, fou	nd in ARM 36.12.112, for the	e period of diversion for the purposes for which	□ Y ■ N	□ F
		riod of diversion	n fall within Department stan	dards?	■ Y □ N	□F
b			•	dards, explain how the period of diversion is		
U	reasonable for the		ians ouiside Department stan	dards, explain now the period of diversion is		🗆 r
	Municipalites requ	ire broad discre	tion in their use of water, and	therefore a period of use encompassing the entire		
	year (1/1-12/31) is	s necessary.				
					-	
20. 10.1		1 11	• • .•	1. 0.11		
			n irrigation purpose, answer t	the following questions.		
a	. What were the cro	p(s) grown?				\Box F

i. If the crop(s) grown include hay, how many cuttings were there per season and how many days did they last?		□F
b. Did diversions ever temporarily cease within the period of use? This may include water shortages or calls based on priority date.	\square Y \square N	□F
i. If yes, please explain.	□ A	□F

Historical Use: Historical Diverted Volume

39. Answer the que	estions below related to the historical purposes of the water rights being changed.							
a. Irrigati	on							
i.	Do you want ARM 36.12.1902(11) to be used to calculate historical diverted volume?	\square Y \square N	□ F					
	1. If no, provide a Historical Water Use Addendum (Form 606-HUA). Form 606-HUA must be							
	submitted to the Department before the Preapplication Meeting Form is completed.							
b. Non-iri	rigation							
i.	How often was water historically diverted?		□ F					
	1/1-12/31							
ii.	What was the duration of each historical diversion?		□F					
	1/1-12/31							
iii.	Was wastewater historically discharged? If yes, what amount was discharged?	□Y■N	□F					
iv.	What is the volume of water historically diverted (AF)? perfected volume = 179 AF, unperfected 198 AF		□F					
	• • • • • • • • • • • • • • • • • • • •							
V.	How did you determine the volume of water historically diverted? perfected volume verified at PCN (verified during previous change)	□ A	□ F					
	and unperfected volume represents the authorized volume							
vi.	Did the historical diverted volume serve more than one purpose of use?	\square Y \blacksquare N	\Box F					



1.	If yes, how much of the diverted volume served each purpose of use and how did you determine this?	□ A	□ F

Historical Use: Historical Consumed Volume

40. Answer the questions below related to the historical purpose of the water rights being changed.				
a. Irrigation				
i. Will you use Department standards for historical consumptive use as defined in ARM 36.12.1902?	\square Y \square N	□ F		
1. If no,				
a. What method will you use to determine historical consumptive use?	□ A	□F		
b. Provide a Historical Water Use Addendum (Form 606-HUA) to the Department. Form 606-HUA must be submitted to the Department before the Preapplication Meeting Form is completed.		□ F		
2. If yes,				
a. What is the historical irrigation method type and subtype? Irrigation method types include flood and sprinkler. Flood irrigation subtypes include level border, graded border, furrow, contour ditch, or wild flood. Sprinkler subtypes include wheel line and center pivot.	□ A	□F		
b. What was the slope of the historical place of use?		□ F		
c. Are there any factors beyond irrigation method type/subtype and place of use slope that may influence percent efficiency of irrigation?	□Y□N	□F		
i. If yes, provide evidence to support the modified percent efficiency of irrigation in the Historical Water Use Addendum (Form 606-HUA). These factors may include infrastructure age, soil characteristics, or field improvements. Form 606-HUA must be submitted to the Department before the Preapplication Meeting Form is	□S	□F		



Historical Use

16

		completed.					
	d. Based on answers to the above questions, what is the percent efficiency of irrigation?						□F
	e.	What is the County Ma	anagement Factor?				□F
	f.	What is evapotranspira	What is evapotranspiration (ET) based on the irrigation method and county?				
	g. What percent of applied water are irrecoverable losses per ARM 36.12.1902(17)?						□F
	h.	irrigation water deman		istorical place of use that contribut	te to the	□Y□N	□F
		i. If yes,		ed to serve the irrigation purpose?			
		period	of diversion and use (MM e volume of water (AF) con	ping water right, please list the average (GPM or ntributed to the total irrigation water	CFS),	□ A	□F
Water Right No.		g. Period of Diversion M/DD-MM/DD)	Avg. Period of Use (MM/DD-MM/DD)	Flow Rate (GPM or CFS)	Volur	ne Contribute	d (AF)

b. Lawn and garden			
i. Will you use the Department standards for historical consumptive use volume for lawn and garde		\square Y \square N	□F
Department standards include 2.5 acre-feet per acre, or a calculated volume based on Irrigation V Requirements for turf grass.	vater		
1. If yes, which standard?			□F
If no, please provide an estimate of historical water use based on expert analysis and met to determine this estimate.	hods used	□ A	□ F
c. Stock			_
 i. Which volume standard for animal units applies to historical use and why? The standards are eith 30 gallons per animal unit per day. 	ner 15 or		□F
ii. How many animal units were historically served?			□F
iii. Did these animal units rely entirely on the water right(s) proposed for change for their full water	demand?	□Y□N	□F
1. If no, explain.		□ A	□F
d. Domestic and multiple domestic			
i. How many households were served?			□ F
ii. Will the Department standard of 1 acre-foot per household be used? The same standard shall be a historical and proposed uses.	applied to	□Y□N	□F
1. If no, what standard will be used?			□F
iii. Did the historical use include wastewater disposal and treatment?		\square Y \square N	\Box F

		•	•	ne wastewater disposal and treatment system? ty with minimal consumption, or evaporation b	asin or	□ A	□F
		land application?	,	-, ···			
	e. Munic	ipal					
	i.		r (AF) historically consum	ed for municipal purposes?			□F
		198+ 179 AF= 377 AF					
ii. Provide evidence to support historical municipal use such as commercial, lawn and garden, and/or multiple						□s	■ F
			•	hat tie water use to the U.S Census, estimates o	$\cdot \mathbf{f}$		
		historical system capacity a	nd estimates of leakage.				
	f. Other						
i. What is the volume of water (AF) historically consumed for other purposes?							□F
ii. Please submit to the Department evidence to support the volume of water historically consumed.						□S	□F
	Historical V	Use: Historical Places of Sto	orage				
	41. Did the historic	cal use include one or more p	lace(s) of storage, which m	nay include reservoirs, ponds, and pits that are g	greater	□Y■N	\Box F
	than 0.1 acre-fe	eet in volume?	, ,				
a. If yes, for each historical place of storage please provide the surface area in acres (AC), capacity (AF), annual net						□ A	□F
evaporation (FT/year), and number of times per year the place of storage was filled.							
ID Surface Area (AC)		urface Area (AC)	Capacity (AF)	Annual Net Evaporation (FT/YR)	# of A	annual Filling	gs
					1		

Surface Water

☐ Applicable, move on to question 42. ■ Not Applicable, skip to question 67.

The following questions are mandatory for changes to surface water rights and must be filled out before the Preapplication Meeting Form is determined to be complete.

Surface Water: Return Flow Analysis

Questions, Narrative Responses, and Tables			
	<u>boxes</u>	<u>-Up</u>	
42. Do the purposes of the water rights proposed for change include irrigation?	\square Y \square N	\Box F	
a. If yes, does the proposed change include a change in place of use <i>and/or</i> a change in purpose? A change in place of	\square Y \square N	\Box F	
use includes retiring acres in the historical place of use and adding any new acres outside the historical place of use.			
i. If yes, a return flow analysis is required. Move on to answer question 43.			
ii. If no, this section is complete, and you may skip to question 51.			
43. Does the proposed change include a change in purpose?	\square Y \square N		
a. If yes, what is the consumptive use for the proposed non-irrigation purpose? Please explain.	□ A	F	
44. Does the proposed change include a change in place of use? If yes, move on to question 45. If no, this section is complete, and you may skip to question 51.			
45. Provide a map showing the historical and proposed places of use created on an aerial photograph or topographic map with section corners, township and range, and a north arrow.		□F	
46. How many acres, if any, will be retired from the historical place of use?		□F	
47. Are irrigated acres proposed that are outside the historical place of use?	\square Y \square N	□F	
a. If yes,			
i. How many acres?		□F	

ii.	What is the proposed irrigation method type (e.g., flood or sprinkler) and subtype (e.g., level border, graded border, furrow, contour ditch, wild flood, center pivot, or wheel line) for the new acres?						□F	
iii.	What is the slope of the new place of use?							□F
iv.	Based on 4	47.a.i	i to 47.a.iii, what is the p	percent efficiency of irrigation	for the new acres?			□F
v.	What is the County Management Factor for the new acres?							□F
vi.	What is the	e ET	based on the irrigation m	nethod and county for the new	acres?			□F
vii.	What perc	ent o	f applied water are irreco	overable losses for new acres p	per ARM 36.12.1902(17)?			□F
viii.	viii. Do other water rights supplement or overlap the new place of use that contribute to the irrigation water demand?						□Y□N	□F
	1. If	•						
		a.	How will the water righ	its be operated to serve the irr	igation purpose?		□ A	□F
		b.	diversion and use (MM/		ease list the average period of M or CFS), and the volume of w	ater	□ A	□F
Water Right No.		_	. Period of Diversion M/DD-MM/DD)	Avg. Period of Use (MM/DD-MM/DD)	Flow Rate (GPM or CFS)	Volui	me Contribut	ted (AF)



48.	Do you have information for the Department to consider about the source and location where return flows historically accrued?	\square Y \square N	□F
	a. If yes, explain.	□ A	□F
49.	Based on the preliminary data provided by the Department at this preapplication meeting, to what surface water sources return flows accrue before and after the proposed change? *Return flow data provided by the Department at the preapplication meeting is preliminary and is subject to change during the Technical Analysis.	do	□F
50.	If an analysis of impacts to identified surface water rights is required as part of the return flow analysis, pursuant to ARM 36.12.1303(3)(c)(iii), do you elect to answer non-mandatory questions 161 to 163 to provide information required for the extended return flow analysis?		□F
	a. If yes, go to question 161. If an analysis of impacts to identified surface water rights is required, this information will be used for the analysis.	1	
	b. If no, did you elect in question 1 for the Department to conduct technical analyses?	\square Y \square N	□F
	i. If yes, do you elect for the Department to use publicly available water quantity data for the analysis of impacts to identified surface water rights? If the extended return flow analysis is required and sufficient publicly available water quantity data is not available, then the Department will not be able to conduct the extended analysis. You will still have to prove a lack of adverse effect from the proposed change.		□F
	ii. If no, an analysis of impacts to identified surface water rights will need to be completed as part of the extended return flow analysis. The Department will include the extended analysis in its scientific credib review of the Technical Analyses.	ility	
	Surface Water: Mitigation Analysis		
51.	Are you changing the purpose to mitigation to meet the criteria of issuance for another application? If yes, answer the questions in this section (questions 52 to 60). If no, this section is complete, and you can skip to question 61.	\square Y \square N	□F

52. Identify the water right(s) proposed for change to a mitigation purpose, the water right(s) identified as needing mitigation and the application number for the water right(s) identified as needing mitigation.					□ A	□F			
			ed as needing mitigation wa						□F
54. By what means will mitigation water be made available (e.g., infiltration gallery, water left instream)? You must provide a copy of all relevant discharge permits at application submittal (§85-2-364, MCA).						□ A	□F		
55. What is	the locat	ion (¼ ¼ ¼ sectio	on of start and end of reach) and length (FT) of the	e mitiga	tion reach?			□F
56. What is	the amou	unt, timing, and lo	ocation (1/4 1/4 1/4 section) of	water needed for mitig	ation?			□ A	□F
Month	Days	Amount	Location	Month	Days	Amount	Location		
January				July					
February				August					
March				September					
April				October					
May				November					
June				December					
57. How do			ater rights proposed for cha	ange to mitigation com				□ A	□ F

a. If yes, describe and submit them to the Department.						\square S	□F		
-									
50 D. 41	4:-1	. 	4		4 41		. 11		
mitigation	_		ige to mitigation have a p	period of use that is gre	eater tha	n or equal to the per	ioa wnen	\square Y \square N	□ F
			ter be made available du	ring the entire period v	vhan mi	tigation is necessary	9	\Box A	□F
a.	11 110, 110	w will illingation wa	ter de made avanable dui	ing the entire period v	viieli iiii	nganon is necessary	•	$\sqcup A$	L F
-				· · · · · · · · · · · · · · · · · · ·					
-									
60. Will oth	er water	rights contribute to r	nitigation water?					\square Y \square N	□F
a.	If yes, w	hat amount, at what	timing, and at which loca	tion (1/4 1/4 1/4 section)	will they	contribute?		□ A	□F
Month	Days	Amount	Location	Month	Days	Amount	Location		
January				July	,				
February				August					
March				September					
April				October					
May				November					
June				December					
Surfa	ce Wate	r: Aquifer Recharge	e Analysis						
61. Are you	changin	g the purpose to aqui	fer recharge to serve a cu	irrent purpose or chang	ging the	purpose to marketin	g for	\square Y \square N	□F
mitigatio	n/aquife	er recharge for a futur	re mitigation purpose? If	yes, answer the questi	ons in the	nis section (question	s 62 to 66).		
			u can skip to question 67						
62. Is this ac	uifer red	charge for a current r	nitigation need or market	ing for mitigation/aqu	ifer recl	narge for a future mit	tigation		□F
need?									
(2. 11.11		1 11 10 1		1 0	1 0		2		
			having net depletions in	need of mitigation or a	as benef	iting from marketing	g tor		□F
mitigatio	on/aquife	er recharge water?							

•	at means will aquifer recharge water be made available? You must provide a copy of all relevant discharge permits at tion submittal (§85-2-364, MCA).	□ A	□F
How do	the priority dates of the water rights proposed for change to aquifer recharge compare to other water rights on the	□ A	□F
•	have measurement records or Water Commissioner records that show the reliability of the water rights proposed for to aquifer recharge?	□Y□N	□F
a.	If yes, describe and submit them to the Department.	□S	□F

Groundwater

■ An	nlicable.	move on to	question 67.	□ Not Ap	nlicable, s	kin to c	nuestion 99.
	PIICUNIC	, 1110 , 0 011 00	queblion of.	_ 100110	pricetore, c	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	ineportor jo

The following questions are mandatory for changes to groundwater rights and must be filled out before the Preapplication Meeting Form is determined to be complete.

Groundwater: Adequacy of Diversion

	Quest	tions, Narrative Respon	ses, and Tables			Check-	Follow -Up
67 What is the flow	w rate (GPM or CFS), volu	na (AE) and nariad of di	version (MM/DD M	M/DD) required at each r	NOTE OF THE OFFI	boxes \ \ \ \ \ \ \ \ \ \ \	
	oint of diversion? Label using			, .		$\sqcup A$	■ F
		ig the same POD ID num	ber as the Proposed	Ose Map (question 6) to i	natch this		
	information with the location information.						
POD#	Flow Rate (GPM or C	CFS) Volume (AF)		Period of Diversion			
					1/1-12/31		
					1.0	1	_
	ly pumping schedule differ					\square Y \square N	■ F
	s or the IWR 80% net irriga						
l • • • • • • • • • • • • • • • • • • •	provide the monthly pumping	ng schedule in the table b	elow. Label using the	e same POD ID number a	s the	\square A	■ F
Propos	ed Use Map (question 6).						
Month	POD#	Volume (AF)	Month	POD#	Vo	lume (AF)	
January			July				
February			August				
March			September				
April			October				
May			November				
June			December				
69. Answer the foll	lowing questions specific to	the means of groundwate	er diversion.				
Well/Pit	Questions 70 to 71	Developed Spring	Question 72	Pond	Que	estions 73 to 76	5



Groundwater: Adequacy of Diversion: Well/Pit \blacksquare Applicable \square Not Applicable

70. Have you submitted a completed Form 633 to DNRC for review?	□Y■N	■ F
a. If no, submit Form 633 to DNRC for review. Form 633 is required by the time the Preapplication Meeting Form is	\Box S	■ F
deemed complete.		
b. If yes, did the Department identify deficiencies?	\square Y \square N	□F
1. If yes, are variances from ARM 36.12.121 needed?	\square Y \square N	□F
a. If yes,		
i. Do you have data for aquifer characteristics?	\square Y \square N	□F
1. If yes, provide the data to the Department.	\square S	□F
ii. Have you submitted Form 653 to the Department?	\square Y \square N	□F
1. If yes, was the variance granted?	\square Y \square N	□F
71. Have all the wells/pits been constructed?	■ Y □ N	□F
a. If yes, provide a map with the location of each well/pit labeled, the well/pit depth, and, if available, the GWIC ID. Create map on an aerial photograph or topographic map and include the following: well/pit location, well/pit depth, GWIC ID (if available), section corners, township and range, and a north arrow.	□S	■F
b. If no,		
i. When will the wells/pits be constructed?		□F
ii. Do you have an initial map with the proposed location of wells/pits?	\square Y \square N	□F
 If yes, provide an initial map to the Department. Create map on an aerial photograph or topographic map and include the following: proposed well/pit location, section corners, township and range, and a north arrow. 		□F
iii. What is the anticipated depth for each new well/pit? Label on the initial map if the proposed location is known. Otherwise provide the depth(s) here:	S	□F
iv. Is the requested volume for each new well/pit known?	\square Y \square N	□ F
1. If no, what is the total requested volume (AF) and the number of new PODs?		□F

72. Have you meas	sured the source?	\square Y \square N	□F
a. If yes,			
i.	Submit measurements to the Department.	□S	□F
ii.	With what method were measurements collected?	□ A	□ F
iii.	What is the interval of measurements?		□F
iv.	Is the interval of measurements sufficient to comply with ARM 36.12.1703(1)?	\square Y \square N	\Box F
b. If no, o	or if measurements do not comply with ARM 36.12.1703(1),		
i.	When do you plan to measure?		□ F
ii.	With what method and at what interval will measurements be collected?	□ A	□F
Gro	undwater: Adequacy of Diversion: Pond ☐ Applicable ■ Not Applicable		
73. Have you subm	nitted Form 653 to apply for a variance from ARM 36.12.121 for the Aquifer Test?	\square Y \square N	□F
a. If yes,	did the Department approve the variance request?	\square Y \square N	□F
74. Submit pond ba	athymetry data, survey, or engineering plans to the Department.	\Box S	□F
_	dentifying the location of the proposed pond to the Department. Create map on an aerial photograph or up and include the following: pond location, section corners, township and range, and a north arrow.	□S	□F
•	ucting Technical Analyses, what is your plan to determine depth, surface area, and net evaporation of the epartment is conducting Technical Analyses, write N/A.	□ A	□F

Groundwater: Adverse Effect to Existing Groundwater Rights
All information to calculate the one-foot drawdown contour was collected in previous questions.

Groundwater: Adverse Effect to Surface Water Rights

Groundwater: Adverse Effect to Surface Water Rights: Surface Water Depletion Analysis

77. Does the proposed change include a change in point of diversion or a change in place of use or purpose that will lead to a change in consumptive use or pumping schedule? If you do not know if a change in place of use or purpose will lead to a change in consumptive use or pumping schedule, work through this with the Department. If yes, a surface water depletion analysis is required; move on to question 78. If no, this section is complete; skip to question 80.	□ Y ■ N	□F
78. Based on the preliminary data provided by the Department at this preapplication meeting, what are the hydraulically connected surface water sources before and after the proposed change? *Net depletion data provided by the Department at the preapplication meeting is preliminary and is subject to change during the Technical Analysis.	□ A	□F
79. If an analysis of impacts to identified surface water rights is required as part of the surface water depletion analysis, pursuant to ARM 36.12.1903(2)(f), do you elect to answer non-mandatory questions 166 to 168 to provide information required for this extended surface water depletion analysis?	□Y□N	□F
a. If yes, go to question 166. If an analysis of impacts to identified surface water rights is required for the surface water depletion analysis, this information will used for the analysis.		
b. If no, did you elect in question 1 for the Department to conduct technical analyses?	\square Y \square N	□F
i. If yes, do you elect for the Department to use publicly available water quantity data for the analysis of impacts to identified surface water rights for the surface water depletion analysis? If this extended surface water depletion analysis is required and sufficient publicly available water quantity data is not available, then the Department will not be able to conduct the extended surface water depletion analysis. You will still have to prove a lack of adverse effect from the proposed change.	□Y□N	□F
ii. If no, you may still include the analysis of impacts to identified surface water rights with the surface water depletion analysis. The Department will include the extended analysis in its scientific credibility review of the Technical Analyses.		

80. Do the purposes of the water rights proposed for change include irrigation?	□Y■N	□ F
a. If yes, does the proposed change include a change in place of use and/or a change in purpose? A change in place of	\square Y \square N	□F
use includes retiring acres in the historical place of use and adding any new acres outside the historical place of use.		
i. If yes, a return flow analysis is required. Move on to answer question 81.		
ii. If no, this section is complete, and you may skip to question 89.		
81. Does the proposed change include a change in purpose?	□Y■N	
a. If yes, what is the consumptive use for the proposed non-irrigation purpose? Please explain.	□ A	□F
82. Does the proposed change include a change in place of use? If yes, move on to question 83. If no, this section is complete, and you may skip to question 89.	\square Y \square N	
83. Provide a map showing the historical and proposed places of use. Create map on an aerial photograph or topographic map that shows the following: section corners, township and range, and a north arrow.	□S	□F
84. How many acres, if any, will be retired from the historical place of use?		□F
85. Are irrigated acres proposed that are outside the historical place of use?	\square Y \square N	□F
a. If yes,		
i. How many acres?		□F
ii. What is the proposed irrigation method type and subtype (e.g., level border, graded border, furrow, contour ditch, or wild flood) for the new acres?		□F
iii. What is the slope of the new place of use?		□F
iv. Based on question 85.a.ii to 85.a.iii, what is the percent efficiency of irrigation for the new acres?		□F

V.	v. What is the County Management Factor for the new acres?						□F
vi.	What is the ET	based on the irrigation i	method and county for the ne	w acres?			□F
vii.	What percent of	applied water are irrec	overable losses for new acres	5?			□F
viii.	Do other water idemand?	rights supplement or ov	erlap the new place of use th	at contribute to the irrigation water	er	□Y□N	□F
	1. If yes,						
	b.	For each supplemental diversion and use (MM	I/DD-MM/DD), flow rate (G	please list the average period of PM or CFS), and the volume of w	vater	□ A	□ F
		3 7	total irrigation water deman		1		
Water Right No.		eriod of Diversion DD-MM/DD)	Avg. Period of Use (MM/DD-MM/DD)	Flow Rate (GPM or CFS)	Volui	ne Contribut	red (AF)
	L			•	1		
86. Do you have infaccrued?	formation for the	Department to conside	r about the source and location	on where return flows historically		\square Y \square N	□F

	a.	If yes, explain.	□ A	□F
87.	accrue l	on the preliminary data provided at this preapplication meeting, to what surface water sources will return flows before and after the proposed change? *Return flow data provided by the Department at the preapplication meeting minary and is subject to change during the Technical Analysis.	□ A	□F
88.	36.12.1	alysis of impacts to identified surface water rights is required as part of the return flow analysis, pursuant to ARM 303(5)(d)(iii), do you elect to answer non-mandatory questions 161 to 163 to provide information required for this ed analysis?	□Y□N	□ F
		If yes, go to question 161. If an analysis of impacts to identified surface water rights is required as part of the return flow analysis, this information will used for the analysis.		
	b.	If no, did you elect in question 1 for the Department to conduct technical analyses?	\square Y \square N	□F
		i. If yes, do you elect for the Department to use publicly available water quantity data for the analysis of impacts to identified surface water rights? If this extended return flow analysis is required and sufficient publicly available water quantity data is not available, then the Department will not be able to conduct the extended analysis. You will still have to prove a lack of adverse effect from the proposed change.	□Y□N	□F
		ii. If no, an analysis of impacts to identified surface water rights will need to be completed as part of the return flow analysis. The Department will include the extended analysis in its scientific credibility review of the Technical Analyses.		
	Groi	undwater: Mitigation		
89.	-	require mitigation water to meet the criteria of issuance for this change application or for a different application? If swer the questions in this section (questions 90 to 98). If no, this section is complete, and you can skip to question	□Y■N	□F
90.	Please i mitigati	identify the water rights proposed for change to a mitigation purpose and the water rights identified as needing ion.	□ A	□F

91. What sources have been identified as needing mitigation water?						□F			
92. By what	92. By what means will mitigation water be made available?					□ A	□F		
93. What is t	the locat	ion (¼ ¼ ¼ section	on of start and end of reach	n) and length (feet) of th	e mitiga	tion reach?			□F
94. What is t	the amou	ınt, timing, and lo	ocation (1/4 1/4 1/4 section) of	water needed for mitigate	ation?			\square A	□F
Month	Days	Amount	Location	Month	Days	Amount	Location		
January				July					
February				August					
March				September					
April				October					
May				November					
June				December					
			·						
95. How do the priority dates of the water rights proposed for change to mitigation compare to other water rights on the source?						□ A	□F		
96. Do you have measurement records or Water Commissioner records that show the reliability of the water right(s) proposed for change to a mitigation purpose?						□Y□N	□F		
a. If yes, describe and submit them to the Department.						□S	□F		
97. Do the water rights proposed for change to mitigation have a period of use that is greater than or equal to the period when mitigation is necessary?						\square Y \square N	□F		

a.	If no, how will mitigation water be made available during the entire period when mitigation is necessary?						□ A	□F	
-									
98. Will oth	er water	rights contribute	to mitigation water?					\square Y \square N	□F
a.	If yes, w	hat amount, at w	that timing, and at which location (1/4	1/4 1/4 section)	will they	contribute?		□ A	□F
Month	Days	Amount	Location (1/4 1/4 1/4 Section)	Month	Days	Amount	Location (1/4 1/4 1/4 Section	on)
January				July					
February				August					
March				September					
April				October					
May				November					
June				December					

Project-Specific Questions

The following questions are mandatory when applicable and must be filled out before the Preapplication Meeting Form is determined to be complete.

Temporary Change

Ouestions, Narrative Responses, and Tables	Check-	<u>Follow</u>
	<u>boxes</u>	<u>-Up</u>
99. Does the proposal include a temporary change? If yes, please answer the questions in this section (questions 100 to 1 each water right being changed. If no, or if you answered these questions earlier in the preapplication meeting, this s		□F
is complete and you can skip to question 106.	section	
100. What element(s) of the water right(s) are being temporarily changed?		□F
101. For how many years will the water right(s) be temporarily changed?		□F
102. Will the temporary change be intermittent over the years?	\square Y \square N	□F
a. If yes, explain.	□ A	□F
103. For what purpose will the water rights be temporarily used?		□F

104. Is the quantity of water subject to the temporary change being made available from the development of a new water conservation or storage project?					□Y□N	□F
a. If yes, explain	the water conservation or storage	e project.			□ A	□F
105. If you are answering Project Specific Questions as they are referenced in Application Details, return to question 10 if you are proposing to add a place of use on State of Montana Trust Land and question 15 if you are proposing a temporary change that does not involve State of Montana Trust Land. If you are answering in consecutive order, go to question 106.						
Change in Purpose						
106. Does the project involve a change in purpose? If yes, answer the questions in this section (questions 107 to 109). If no, of if you answered these questions earlier in the preapplication meeting, this section is complete and you can skip to question 110.					□Y■N	□F
107. Identify the propose each purpose.	ed new purpose, flow rate (GPM	I or CFS), volume (AF)	, and period of use (MM/DD-MM	M/DD) for	□ A	□F
Purpose	Flow Rate (GPM or CFS)	Volume (AF)	Period of Use Start (MM/DD-MM/DD)	Period of MM/DD)	Use End (MI	M/DD-
<u> </u>		L	L			
108. Explain why the requested flow rate and volume is the amount needed for the purpose.					□А	□F
109. If you are answering Project Specific Questions as they are referenced in Application Details, return to question 11 and if you are answering in consecutive order, go to question 110.						

Change in Place of Storage

110. Does the project involve a change in place of storage? If yes, answer the questions in this section (questions 111 to 119) for each individual place of storage (use additional Change in Place of Storage sheet for additional places of storage). If no, or if you answered these questions earlier in the preapplication meeting, this section is complete; skip to question 120.	□Y■N	□F
111. Submit a map showing the location of the place of storage. Create map on an aerial photograph or topographic map that shows the following: place of storage, section corners, township and range, and a north arrow.	□S	□F
112. Is this application to add a new place of storage or change an existing place of storage?		□F
a. If application is to change an existing place of storage, list the water rights that include the place of storage and a short description of the proposed change.	□А	□F
113. Is the place of storage located on-stream?	\square Y \square N	□F
a. If no, explain the conveyance means to and from the off-stream place of storage and any losses that may occur with that conveyance.	□ A	□F
114. What is the proposed capacity of the place of storage? Use bathymetry data, survey, or engineering plans for capacity. Submit the data source used with this form. In lieu of these data sources, use the following equation: Surface Acres x Maximum Depth (FT) x 0.5 (0.4-0.6 depending on side slope) = Capacity (AF)	□S	□F
115. Will the place of storage include primary and/or emergency spillways? Preliminary design specifications for primary and emergency spillways must be included with application submittal (ARM 36.12.113).	□Y□N	□F
116. Will the place of storage be lined?	\square Y \square N	□F
117. What is the annual net evaporation of water from the place of storage using the standards in ARM 36.12.116(1) and the Department's Gridded Net Evaporation Layer?		□F
118. Is the place of storage capacity calculated to be greater than 50 acre-feet?	\square Y \square N	□F
a. If yes, have you made an application to the DNRC Water Operations Bureau for a determination of whether the dam or reservoir is a high-hazard dam?	□Y□N	□F

•	. If you are answering Project Specific Questions as they are referenced in Application Details, return to question 12 and if you are answering in consecutive order, go to question 120.					
Ditch-Specific Que						
		st one conveyance ditch? If ye dication meeting, skip to ques	es, answer questions 121 to 122. Ition 123.	If no, or if	□Y■N	□F
proposed for change. I question 122.d). The n township and range, as	121. Submit a Historical Use Ditch Map that shows every ditch conveying water for the historical use of all water right(s) proposed for change. Label the ditch name(s), POD(s), the POU(s), and the ditch measurement locations (requested in question 122.d). The map should be created on an aerial photograph or topographic map with the following: section corners, township and range, and a north arrow.				□ S	□F
	conveyance ditch, answer al Historical Ditch Sheet for		re is more than one historical con	nveyance		
a. What is the di	ch name?					□F
b. List the water	b. List the water right(s) proposed for change that were conveyed by the ditch.					□F
	c. What is the distance water was historically carried by the conveyance ditch? Only include segments between the POD and start of the POU; do not include segments within the POU.					□F
characteristics	d. Provide at least one set of ditch measurements, which include width (FT), depth (FT), and slope (%). Discuss ditch characteristics with DNRC to determine the minimum number of ditch measurements. Include the location of each measurement, labeled with the 2-digit measurement ID number, used on the map submitted for question 121.					□F
ID#	Width (FT)	Depth (FT)	Slope (%)	Date	of Measurem	ent
L	ļ			 		
	e. What is a reasonable Manning's n value? List the factors used for estimation. If you do not know this value, please work through estimation with the Department.				□ A	□ H



	f. What type of soils compose the historical conveyance ditch? For lined ditches, write "lined" instead.			□ A	□F	
	g.	Are other water	r rights conveyed	by the historical conveyance ditch?	□Y□N	□F
		i. If yes,	-			
			What are the wa	ater right numbers?	□ A	□F
		2.	What is the sum	n of the flow rates (GPM or CFS) for all water rights conveyed?	□ A	□F
		3.	the historical co POU. If you do should be created	with your best estimate of the historical POUs for the other water rights conveyed by onveyance ditch. Include only POUs between the historical POD and your historical not know this information, the Department can help you create the map. The map ed on an aerial photograph or topographic map and show the following: section in and range, and a north arrow.	□S	□F
	h.	Were any wate	r rights proposed	for change part of one historical water right that was split?	\square Y \square N	□F
		•		ter rights split in such a way to ensure each post-split water right could stand alone e others for carriage water?	□Y□N	□F
		1.	If no, do any of	the water right(s) proposed for change have a carriage water requirement?	\square Y \square N	□F
			a. If yes,			
			i.	List the water right(s) with a carriage water requirement		□F
122	D			Update your Historical Use Ditch Map to label the ditch segments where a carriage water requirement exists for a water right proposed for change. Also, use your best estimate to label the POUs for all water rights included in the carriage water requirement. If you do not know this information, the Department can help you update the map.	□S	□F
123. or				ast one existing or new conveyance ditch? If yes, answer questions 124 to 126. If no, er in the preapplication meeting, this section is complete; skip to question 127.	□Y■N	□F



12	any un measur	changed portions. L rement locations (re	abel all unchanged and propos	sed PODs, all unchanged and p the map should be created on an	t(s) proposed for change, included roposed POUs, and additional calculation aerial photograph or topograph	litch	□S	□F
12		A A	•	questions 125.a to 125.i. If the Sheet for each additional ditcl	ere is more than one proposed us n.	se		
	a.	What is the ditch t	name?					□F
	b.	Is this ditch a histo	orical conveyance ditch detaile	ed in questions 121 to 122?			\square Y \square N	□ F
		-	•	changed, to the best of your knitch lining, or water rights conv	nowledge, from historical conditates to the ditch?	tions:	□Y□N	□F
			yes, answer questions 125.c to					
2. If no, do not answer questions 125.c to 125.i for this ditch because the information remains unchanged. Move on to the next proposed use conveyance ditch, or if none remain, skip to question 127.								
	c.	List the water righ	at(s) proposed for change that a	are going to be conveyed by the	e ditch.			□F
d. What is the distance water will be carried by the conveyance ditch? Only include segments between the POD and start of the POU; do not include segments within the POU.					and	□А	□F	
e. Provide at least one set of ditch measurements, which include width (FT), depth (FT), and slope (%). Discuss ditch characteristics with DNRC to determine the minimum number of ditch measurements. Include the location of each measurement, labeled with the 2-digit measurement ID number, used on the map submitted for question 124.						□S	□F	
Ι	D #		Width (FT)	Depth (FT)	Slope (%)	Date	of Measurem	ent
_								
-								
-								

f. What is a reasonable Manning's n value? List the factors used for estimation. If you do not know this value, please work through estimation with the Department.	□ A	□F
g. What type of soils compose the proposed conveyance ditch? For lined ditches, write "lined" instead.	□ A	□F
h. Are other water rights conveyed by the proposed conveyance ditch?	\square Y \square N	□F
i. If yes,		
1. What are the water right numbers? ———————————————————————————————————	□ A	□F
2. What is the sum of the flow rates (GPM or CFS) for all water rights conveyed? ———————————————————————————————————	□ A	□F
3. Provide a map with your best estimate of the current POUs for the other water rights conveyed by the proposed conveyance ditch. Include only POUs between the POD and your proposed POU. If you do not know this information, the Department can help you create the map. The map should be created on an aerial photograph or topographic map and show the following: section corners, township and range, and a north arrow.	□s	□F
i. Were any water right(s) proposed for change identified as having a carriage water requirement in question 122.h.i.1.a.i?	□Y□N	□F
 i. If yes, update your Proposed Use Ditch Map to label the ditch segments where a carriage water requirement exists for a water right proposed for change. Also, use your best estimate to label the POUs for all water rights included in the carriage water requirement. If you do not know this information, the Department can help you update the map. 126. If you are answering Project Specific Questions as they are referenced in Application Details, return to question 13 and 	□ S	□F
if you are answering in consecutive order, go to question 127.		

Water Marketing

	10	_
Does this project involve water marketing? If yes, answer the questions in this section (questions 128 to 134). If no, or	if □ Y ■ N	□F
you answered these questions earlier in the preapplication meeting, this section is complete; skip to question 135.		
128. Identify the flow rate (GPM or CFS) and volume of water (AF) that will be marketed.		□ F
	-	
129. Will the marketed water return to the source?	\square Y \square N	□F
a. If yes, explain how that determination was made.	□ A	□F
	_	
	_	
	_	
130. For what purpose(s) will the marketed water be used?	□ A	□F
	_	
131. How will you control or limit access to the water?	\Box A	
131. How will you control of minit access to the water:		L F
	-	
	_	
132. Do you have contracts for the entire volume and flow rate sought?		□F
133. Provide a service area map. Create map on an aerial photograph or topographic map and shows the following: general	\square S	\Box F
service area boundary, section corners, township and range, and a north arrow.		
134. If you are answering Project Specific Questions as they are referenced in Application Details, return to question 19 and	1	
if you are answering in consecutive order, go to question 135.		
Instream Flow Change		
135. Does the project involve an instream flow change? If yes, answer the questions in this section (questions 136 to 145).	f DY N	□F
no, or if you answered these questions earlier in the preapplication meeting, this section is complete; skip to question 146.		
136. Is the proposal to retire all the use from the historical purpose throughout the entire period of use?	\square Y \square N	□ F
a. If no, describe why not in detail.	□ A	\Box F
	_	
	_	
	_	



137. What is the name of the source of water where streamflow will be maintained or enhanced?		□F
138. Provide specific information on the location (1/4 1/4 1/4 section of start and end of reach) and length (FT) of the stream reach in which the streamflow is to be maintained or enhanced.	□ A	□F
139. Does the protected reach begin at the existing point of diversion?	\square Y \square N	□F
a. If no, does the proposed protected reach begin upstream of or downstream from the existing point of diversion?		□F
140. Does return flow go back to the source of supply? The Department provides an initial estimate of the sources where return flow historically accrued at the preapplication meeting.	□Y□N	□F
141. Describe the way the streamflow is to be maintained or enhanced.	□ A	□F
142. Provide initial details about a streamflow measuring plan, which include the points where measurements occur, the interval of measurement, and the methods and equipment used. A complete streamflow measuring plan will be required for the application.	□ A	□F
143. Provide initial details about an operation plan, which include the proposed flow rate (GPM or CFS) to be protected up to the proposed volume (AF) and the period when protection is to occur. If there is a "trigger flow" associated with your operation plan, please explain. A complete operation plan, based on the Technical Analysis, will be required for the application.	□ A	□F

144. Is the amount of water proposed for change in the application made available through creation of a "water saving	\square Y \square N	□F
method," as defined in ARM 36.12.101?		
a. If yes, complete the Salvage Water section (questions 146 to 150).	\square S	□ F
145. If you are answering Project Specific Questions as they are referenced in Application Details, return to question 20 and		
if you are answering in consecutive order, go to question 146.		
Salvage Water		
146. Does this project involve salvage water? Salvage water does not include destroying phreatophytes, removing vegetation,	□Y■N	□F
converting to a less consumptive crop, or converting to a partial irrigation schedule. If yes, answer the questions in this		
section (questions 147 to 150). If no, or if you answered these questions earlier in the preapplication meeting, this section is		
complete and you can skip to question 151.		
147. What water saving method was implemented? This may include lining an unlined ditch or canal, converting unlined	□ A	□ F
ditch or canal to pipeline, converting high profile or high-pressure sprinklers to low pressure, and other (explain).		
148. How much water was salvaged from creation of the water saving method? Include flow rate (GPM or CFS) and volume		□F
(AF).		
149. How did you determine the amount of water salvaged?	\Box A	□F
149. How did you determine the amount of water sarvaged:		
		
150 If you are a considered Considered Considered Advanced from 1 in Audit of Debits of Considered		
150. If you are answering Project Specific Questions as they are referenced in Application Details, return to question 21 and if you are answering in consecutive order, go to question 151.		
if you are answering in consecutive order, go to question 151.		

Non-Mandatory Questions for Criteria Analysis

The following questions are not mandatory. They should be discussed in the Preapplication Meeting, but do not need to be filled out before the Preapplication Meeting Form is determined to be complete.

Adverse Effect

	Questions, Narrative Responses, and Tables	Check-
		<u>boxes</u>
151.	Once the historical use analysis is complete for the application, be ready to compare the historical use with the proposed use. Do	\square Y \square N
you	u have evidence the proposed use exceeds the historical use for flow rate, consumed volume, or diverted volume?	
	a. If yes, what is your plan to address this with the permitting process?	\Box A
152.	Describe your plan to ensure that existing water rights will be satisfied during times of water shortage.	\square A
153.	Explain how you can control your diversion in response to call being made.	□ A
155.	Emplain now you can control your arreston in response to can come made.	
_		
-		
154.	Are you aware of any calls that have been made on the source of supply or depleted surface water source?	\square Y \square N
	a. If yes, explain.	\Box A
155.	Does a water commissioner distribute water or oversee water distribution on your proposed source or depleted surface water	\square Y \square N
sot	urce?	
156.	Will the proposed use change the ability for you to make call?	\square Y \square N

157.	11 1		
If	If there has been a period of nonuse, explain below:		
	a.	Why the water right was not used.	□ A
	b.	Why a resumption of use will not adversely affect other water users.	□ A
	c.	Is the period of nonuse greater than 10 years?	\square Y \square N
	d.	Have water rights been authorized to use the source during the period of nonuse?	\square Y \square N
158.	Fo	r point of diversion changes:	
	a.	Is the proposed point of diversion upstream or downstream of the historical point of diversion?	_
	b.	Are there intervening water users between the historical and proposed point of diversion?	\square Y \square N
	c.	Does the proposed point of diversion allow for diverting water longer during times of shortage?	\square Y \square N
159. ap	159. For place of use changes, will changes to the rate, location, volume, or timing of return flows adversely affect other appropriators?		

Adverse Effect: Evaluation of Impacts to Identified Water Rights for Return Flow Analysis

160.					
1		uestions or answered these questions earlier in the preapplication meeting, this section is complete; skip to			
qu	estion 165.				
161.	For each surface w	ater source receiving return flows, is gage data available?	\square Y \square N		
	a. If yes, answer	the following questions for the number of stream gages that are available.			
	i. One str	ream gage is available			
	1.	What is the gage name?			
	2.	Who operates and maintains the gage?			

3.	Is the stream gage upstream or downstream of the point(s) of diversion?	
4.		\square Y \square N
	includes dams that control the flow and streams with large gaining and/or losing reaches. If you have	
	questions about this, please contact the Regional Hydro-Specialist or the Water Sciences Bureau.	
	Is the period of record greater than or equal to 10 years?	\square Y \square N
6.	How frequently is stage data recorded?	
		_
7.	If data gaps were to occur, are they identified and left unfilled or estimated using interpolation, ice	\square Y \square N
	correction, or indirect discharge measurements methods?	
8.	Was the rating curve established and maintained throughout the duration of the period of record using	\square Y \square N
	measurements taken near the reference gage and stage recorder according to USGS protocols?	
9.	Were there requirements for maintaining a permanent gage datum and meeting specified accuracy limits?	\square Y \square N
10	. Does the gage data meet the Department's standard to be sufficient to calculate the median of the mean	\square Y \square N
	monthly flow rate and volume during the proposed months of diversion?	
	a. If yes, skip to question 163.	
	b. If no, answer question 161.b.	
ii. More t	than one stream gage is available	
1.	List the gage names.	
		_
2.	Who operates and maintains the gages?	
		_
3.	Is one stream gage upstream and one downstream of point(s) of diversion?	\square Y \square N
4.	Do the stream gages have similar periods of record?	\square Y \square N
5.	Are the periods of record each greater than or equal to 10 years?	\square Y \square N
6.	How frequently is stage data recorded at each gage?	
		_
7.	For each gage, if data gaps were to occur, are they identified and left unfilled or estimated using	□Y□N
	interpolation, ice correction, or indirect discharge measurements methods?	

8. Were the rating curves established and maintained throughout the duration of the period of	_
measurements taken near the reference gages and stage recorders according to USGS proto	
9. For each gage, were there requirements for maintaining a permanent gage datum and meet	ing specified □ Y □ N
accuracy limits?	6.1
10. Does the gage data meet the Department's standard to be sufficient to calculate the median	of the mean $\square Y \square N$
monthly flow rate and volume during the proposed months of diversion?	
a. If yes, skip to question 163.	
b. If no, answer question 161.b.	
b. If no gage data is available or if available gage data does not meet the Department's standard to be sufficie	
median of the mean monthly flow rate and volume during the proposed months of diversion, is the source of	otherwise
measured?	
i. If yes,	
1. Submit measurements to the Department.	□ S
2. Who collected the measurements?	□ A
3. With what method was the data collected?	\square A
4. What is the period of record?	
5 Wil. 4: 41 . f	
5. What is the frequency of measurement?	
6. Are there gaps in the data?	
a. If yes, what is the nature of the gaps and how are gaps handled to ensure data qual	
7. Is there a process for maintaining the data and meeting specified accuracy limits?	\Box Y \Box N

a. If yes, explain.	□ A
8. Does available measurement data meet the Department's standard to be sufficient to calculate the median of the mean monthly flow rate and volume during the proposed months of diversion?	\square Y \square N
a. If yes, skip to question 163.	
b. If no, answer question 162.	
162. For each surface water source receiving return flows, does the available measurement data, gage and/or otherwise measured,	\square Y \square N
meet the Department's standard of including a minimum of high, moderate, and low flows to be sufficient to use for validation of a	
department-accepted estimation technique?	
a. If yes, describe the estimation technique.	\Box A
b. If no, will measurements be collected prior to submission of a completed Form No. 606P that meet the Department's	\square Y \square N
standard of including a minimum of high, moderate, and low flows to be sufficient to use for validation of a department-	
accepted estimation technique?	
i. If yes, 1. With what method will the data be collected?	
1. With what method will the data be collected?	\square A
2. What will be the interval of measurement?	
2. What will be the interval of measurement.	

3. Describe the proposed estimation technique.	□ A
ii. If no, describe your plan supply measurements for return flow receiving sources.	□ A
163. If you are conducting Technical Analysis, how will the Area of Potential Adverse Effect be defined for evaluating return flow impacts? If the Department is conducting Technical Analyses, write N/A.	□ A
164. If you went straight to this section when referenced, go back to question 51 for surface water changes and question 88 for groundwater changes. If you waited to answer in consecutive order and have completed all prior sections, move to question 165.	

Adverse Effect: Evaluation of Impacts to Identified Water Rights for Surface Water Depletion Analysis

165. Respond to questions in this section if you elected in question 79 to answer optional questions 166 to 168. If you did not elect to answer these questions or answered these questions earlier in the preapplication meeting, this section is complete; skip to question		
170.		
166. For each hydraulically connected surface water source, is gage data available?	\square Y \square N	
a. If yes, answer the following questions for the number stream gages are available.		
i. One stream gage is available		
1. What is the gage name?		
	_	



2.	Who operates and maintains the gage?	
3.	Is the stream gage upstream or downstream of the start of the depletion?	-
4.	Is there a limiting or controlling factor that would make the Drainage Area Method not practical? This includes dams that control the flow and streams with large gaining and/or losing reaches. If you have questions about this, please contact the Regional Hydro-Specialist or the Water Sciences Bureau.	□Y□N
5.	Is the period of record greater than or equal to 10 years?	\square Y \square N
6.	How frequently is stage data recorded?	-
7.	If data gaps were to occur, are they identified and left unfilled or estimated using interpolation, ice correction, or indirect discharge measurements methods?	\square Y \square N
8.	Was the rating curve established and maintained throughout the duration of the period of record using measurements taken near the reference gage and stage recorder according to USGS protocols?	□Y□N
9.	Were there requirements for maintaining a permanent gage datum and meeting specified accuracy limits?	\square Y \square N
10	. Does the gage data meet the Department's standard to be sufficient to calculate the median of the mean monthly flow rate and volume during the proposed months of diversion?	□Y□N
	a. If yes, skip to question 168.	
	b. If no, answer question 166.b.	
ii. More t	han one stream gage is available	
1.	List the gage names.	-
2.	Who operates and maintains the gages?	-
3.	Is one stream gage upstream and one downstream of the start of the depletion?	\square Y \square N
4.	Do the stream gages have similar periods of record?	\square Y \square N
5.	Are the periods of record each greater than or equal to 10 years?	\square Y \square N
6.	How frequently is stage data recorded at each gage?	



7.	For each gage, if data gaps were to occur, are they identified and left unfilled or estimated using	\square Y \square N
	interpolation, ice correction, or indirect discharge measurements methods?	
8.	Were the rating curves established and maintained throughout the duration of the period of record using	\square Y \square N
	measurements taken near the reference gages and stage recorders according to USGS protocols?	
9.	For each gage, were there requirements for maintaining a permanent gage datum and meeting specified accuracy limits?	\square Y \square N
10	. Does the gage data meet the Department's standard to be sufficient to calculate the median of the mean	\square Y \square N
10	monthly flow rate and volume during the proposed months of diversion?	
	a. If yes, skip to question 168.	
	b. If no, answer question 166.b.	
h If no gage data	is available or if available gage data does not meet the Department's standard to be sufficient to calculate the	
	nean monthly flow rate and volume during the proposed months of diversion, is the source otherwise	\square Y \square N
measured?	mean monthly flow rate and volume during the proposed months of diversion, is the source otherwise	
i. If yes,		
1.	Submit available measurements to the Department	
2.		□ A
2.	who conceted the measurements:	
3.	With what method was the data collected?	\Box A
4.	What is the period of record?	
5	What is the frequency of measurement?	
J.	what is the frequency of measurement:	
6.	Are there gaps in the data?	\square Y \square N
	a. If yes, what is the nature of the gaps and how are gaps handled to ensure data quality?	\square A
7	Is there a process for maintaining the data and meeting specified accuracy limits?	□Y□N
1 /•	is there a process for manualling the data and meeting specified accuracy minus.	

a. If yes, explain.	□ A
8. Does available measurement data meet the Department's standard to be sufficient to calculate the median of	\square Y \square N
the mean monthly flow rate and volume during the proposed months of diversion?	
a. If yes, skip to question 168.	
b. If no, answer question 167.	
167. For each hydraulically connected surface water source, does the available measurement data, gage and/or otherwise measured,	\square Y \square N
meet the Department's standard of including a minimum of high, moderate, and low flows to be sufficient to use for validation of a	
department-accepted estimation technique?	
a. If yes, describe the estimation technique.	\square A
b. If no,	
i. Will measurements be collected prior to submission of a completed Form No. 606P that meet the Department's	\square Y \square N
standard of including a minimum of high, moderate, and low flows to be sufficient to use for validation of a	
department-accepted estimation technique?	
1. If yes,	
a. With what method will the data be collected?	\Box A
b. What will be the interval of measurement?	

	c.	Describe the proposed estimation technique.	□ A
		·	
2.	If no, o	describe your plan to comply with the measurement requirements for hydraulically connected surface	□ A
	water s	sources.	
1	_	nical Analysis, how will the Area of Potential Adverse Effect be defined for evaluating changes to net	\square A
depletions? If the Depa	rtment i	s conducting Technical Analyses, write N/A.	
		· · · · · · · · · · · · · · · · · · ·	
1		section when referenced, go back to question 80. If you waited to answer in consecutive order and	
have completed all price	or section	ns, move to question 170.	
Adequate Means of	^Diversi	ion and Operation	
170. Provide a diagram	of how y	you will operate your system from the point of diversion to the place of use.	\Box S
		ion about the capacity of the diversionary structure(s). This may include, where applicable: pump	□ A
_		calculations, headgate design specifications, and dike or dam height and length.	
172. Is the diversion cap	bable of	providing the full amount requested through the period of diversion?	\square Y \square N

173. wl	Describe the size and configuration of infrastructure to convey water from point of diversion to place of use. This may include, here applicable: ditch capacity and/or pipeline size and configuration.	□ A
174. —	Describe any losses related to conveyance.	□ A
175.	Is the conveyance infrastructure capable of providing the required flow and volume and any losses?	\square Y \square N
176.	Does the proposed conveyance require easements?	\square Y \square N
	a. If yes, explain.	□ A
177. av —	Describe any places of storage, including whether drainage devices will be installed, and provide preliminary designs, if ailable. Preliminary designs will be required at application submittal.	□ A
178. rai	Describe specific information about how water is delivered within the place of use. This may include, where applicable, the nge of flow rates needed for a pivot and output and configuration of sprinkler heads.	□ A
179.	Is the water delivery system capable of providing the requested beneficial use?	\square Y \square N
180.	Will your system be designed to discharge water from the project?	\square Y \square N
	a. If yes, explain the way water will be discharged and the wastewater disposal method.	□ A

181.	Provide a plan of operations.	□ A
_		-
_		-
182.	Can the plan of operations deliver the flow rate and volume for the beneficial use being requested?	\square Y \square N
183.	Do you have any plans to measure your diversion and use?	\square Y \square N
	a. If yes, describe the plan and the type of measurements you will take.	□ A
		_
101		_
184.	Is the means of diversion a well?	\square Y \square N
	a. If yes, are well log(s) available?	\square Y \square N
	i. If yes, submit well log(s) to DNRC	□S
	ii. If no, who drilled the well?	_
	Beneficial Use	
185.	Why is the requested flow rate and volume the amount needed for the purpose?	\square A
_		-
		-
186. 30	Does the Department have a standard for the purposes for which water is used? Department standards can be found in ARM 6.12.112.	\square Y \square N
	a. If yes, does the proposed beneficial use fall within Department standards?	\square Y \square N
187.	If no standard or if proposed beneficial use falls outside of Department standards, explain how the use is reasonable for the	□ A
p	urpose.	
_		-
_		-
		-
100	Will a decided the DEO and the second the second to the second the second to the secon	_
188.	Will your proposed project be subject to DEQ requirements for a public water supply (PWS) system or Certificate of Subdivision Approval (COSA)?	\square Y \square N



a. If yes,	
i. Have you researched or consulted with DEQ regarding those requirements?	\square Y \square N
189. Are you proposing to use surface water for in-house domestic use?	\square Y \square N
a. If yes, does a COSA exist for the proposed place of use?	\square Y \square N
i. If yes, please submit the COSA.	□S
ii. If no, have you researched or consulted with DEQ regarding their requirements?	\square Y \square N
Possessory Interest	
190. Do you have possessory interest, or the permission of the party with possessory interest, of the proposed place of use? Proof of possessory interest or permission of the party with possessory interest is required at application submittal.	□Y□N
a. If no, explain.	□ A

PREAPPLICATION MEETING AFFIDAVIT & CERTIFICATION

"We attest that the information on this form accurately describes the proposed project discussed during the preapplication meeting and that the items marked for follow-up will require the applicant to provide additional information before the form is deemed complete."

"Applicant acknowledges that any information provided by the Department during the preapplication is preliminary and subject to change."


"Applicant acknowledges that if the follow-up information provided to the Department substantially changes the proposed project, for example in a way that alters which sections of the form are applicable or which technical analyses are required, or who is to complete the technical analyses, the applicant will need to schedule a new preapplication meeting so that the department can identify any additional information necessary for completion of the technical analyses (ARM 36.12.1302(3)(c))."

Upon Department receipt of the completed form (within 180 days following the meeting), the Department reserves the first five days of the 45-day period in ARM 36.12.1302(4) or (5) to return the form to the applicant if:

- 1 the completed form does not include all necessary follow-up information identified in the meeting, OR
- 2 the completed form is not adequate for the Department to proceed with technical analyses, OR
- 3 the applicant has elected to complete technical analyses and has not submitted each piece of technical analysis required, OR
- 4 the applicant has substantially changed the details of the proposed project, such as in a way that alters which sections of the form are applicable, which technical analyses are required, or who is to complete the technical analyses.

If the Department returns the form to the Applicant within these five days due to reasons 1-3 above, the Applicant can use the balance of their 180-day period in ARM 36.12.1302(4) or (5) to gather the remaining follow-up information needed. If there is no time remaining in the 180-day period, the Applicant can submit a written request for a new preapplication meeting, pursuant to ARM 36.12.1302(2). Even if there is still time remaining, the Applicant can choose to schedule a new preapplication meeting. The Department shall transfer the \$500 payment received to the new preapplication meeting, or refund the payment to the Applicant if the Applicant desires. If the Department returns the form to the Applicant within these five days due to reason (4) above, the Applicant must submit a written request for a new preapplication meeting, pursuant to ARM 36.12.1302(2). The Department shall transfer the \$500 payment received to the new preapplication meeting, or refund the payment to the Applicant desires.

transfer the 4500 payment rest.		
SODE Walesteld	Todd E Wakefield	1-10-2025
Applicant Signature		Date
Applicant Signature		Date
The With		01/13/2025
Department Signature		Date



FOLLOW-UP PAGE

Applicant will provide all responses to questions marked for follow-up on a separate document entitled "Follow-up Responses" with the question number labeled. Answer questions in the same format as the form. For responses in the form of checkboxes, write "Y", "N", or "S". Constrain narrative responses to the specific question as is asked on the form; do not respond to multiple questions in one narrative. Label units in narrative responses and tables. Tables must have the exact headings found on the form. Questions that require items to be submitted to the Department may be marked "S" when the required item is attached to the Preapplication Meeting Form. Label all submitted items with the question number for which they were submitted. The Applicant may not alter the Preapplication Meeting Form signed at the Preapplication Meeting. Instead, the Applicant must use the Amended Responses procedure defined below. Do not include additional information for questions not marked for follow-up here; instead include any additional information pursuant to the process for amending responses defined below.

Questions marked for follow-up

Questions marked for follow-up	
-5- please add Township/Range to map	-
-6- please add Township/Range to map	-
-9.a.ii- provide list of LLD of POU	-
-30.d.i- submit measurement records, useage data, PSC records, etc.	-
-	-
-	-
-40.e.ii- submit measurment records, useage data, PSC records, etc.	-
-67	-
-68	-
-68.a.	-
-70	-
-70.a.	-
-71.aplease add Township/Range to map	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-

AMENDED RESPONSES PAGE

The Applicant may not alter the Preapplication Meeting Form signed at the Preapplication Meeting or the Follow-up Page. If a response has changed to a question answered at the preapplication meeting, the Applicant can provide a new response in a separate document entitled "Amended Responses" with the question number labeled. Answer questions in the same format as the form. For responses in the form of checkboxes, write "Y", "N", or "S". Constrain narrative responses to the specific question as is asked on the form; do not respond to multiple questions in one narrative. Label units in narrative responses and tables. Tables must have the exact headings found on the form. Questions that require items to be submitted to the Department may be marked "S" when the required item is attached to the Preapplication Meeting Form. Label all submitted items with the question number for which they were submitted. The Applicant will mark all question numbers with an amended response in the table below and note for each question whether the response will replace the response given at the preapplication meeting or will provide additional information to consider in conjunction with the response given at the preapplication meeting. The Applicant will return the "Amended Responses" document with the "Follow-up Responses" document and the signed Preapplication Meeting Form.

Questions with amended responses

orises		
1	-	-
1	-	-
1	-	-
	-	-
-	-	-
1	-	-
1	-	-
1	-	-
ī	-	-
-	-	-
1	-	-
ī	-	-
1	-	-
1	-	-
1	-	-
1	-	-
1	-	-
-	-	-
	-	-
	-	-
	-	-
		-

FOLLOW-UP PAGE AFFIDAVIT & CERTIFICATION

"I/we attest that this preapplication meeting form, follow-up page, and amended responses page accurately portray my proposed project. I am aware that my application for this project will not qualify for a discounted filing fee and expedited timelines if upon submittal of the application to the department, I change any element of the proposed application from the preapplication meeting form and follow-up materials (ARM 36.12.1302(6)(a))."

Dala E. Walle Seelal	1-17-2025
Applicant Signature	Date
Applicant Signature	Date
"We confirm that the preapplication form and follow-up information are adequate for the Department to proceed values 36.12.1303. If the applicant has elected to complete technical analyses, we confirm they have submitted each piece the proposed project and the Department is able to proceed with the scientific credibility review (ARM 36.12.130).	e of technical analysis required based on
The Will	01/21/2025
Department Signature	Date
Department Signature	Date